openSUSE

12.3

www.suse.com

Novembre 06, 2013

System Analysis and Tuning Guide



System Analysis and Tuning Guide

Copyright © 2006–2013 SUSE LLC and contributors. All rights reserved.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or (at your option) version 1.3; with the Invariant Section being this copyright notice and license. A copy of the license version 1.2 is included in the section entitled « GNU Free Documentation License ».

For SUSE or Novell trademarks, see the Novell Trademark and Service Mark list http://www.novell.com/company/legal/trademarks/tmlist.html. All other third party trademarks are the property of their respective owners. A trademark symbol (®, ™ etc.) denotes a SUSE or Novell trademark; an asterisk (*) denotes a third party trademark.

All information found in this book has been compiled with utmost attention to detail. However, this does not guarantee complete accuracy. Neither SUSE LLC, its affiliates, the authors nor the translators shall be held liable for possible errors or the consequences thereof.

Table des matières

About This Guide ix

1 Documentation disponible x

2 Remarques xi

3 Conventions de la documentation xii

4 À propos de la création de ce manuel xiii

5 Code source xiii

6 Remerciements xiii

I Basics 1

1 General Notes on System Tuning 3

1.1 Be Sure What Problem to Solve 3

1.2 Rule Out Common Problems 4

1.3 Finding the Bottleneck 4

1.4 Step-by-step Tuning 5

II System Monitoring 7

2 System Monitoring Utilities 9

2.1 Multi-Purpose Tools 9

2.2 System Information 16

2.3 Processes 22

2.4 Memory 27

2.5 Networking 30
2.6 The /proc File System 33
2.7 Hardware Information 36
2.8 Files and File Systems 37
2.9 User Information 40
2.10 Time and Date 40
2.11 Graph Your Data: RRDtool 41

3 Monitoring with Nagios 49

3.1 Features of Nagios 49
3.2 Installing Nagios 49
3.3 Nagios Configuration Files 50
3.4 Configuring Nagios 53
3.5 Troubleshooting 56
3.6 For More Information 57

4 Analyzing and Managing System Log Files 59

4.1 System Log Files in /var/log/ 59
4.2 Viewing and Parsing Log Files 62
4.3 Managing Log Files with logrotate 62
4.4 Monitoring Log Files with logwatch 63
4.5 Using logger to Make System Log Entries 65

III Kernel Monitoring 67

5 SystemTap—Filtering and Analyzing System Data 69

5.1 Conceptual Overview 69
5.2 Installation and Setup 72
5.3 Script Syntax 74

5.4 Example Script 81
5.5 For More Information 82

6 Kernel Probes 83

6.1 Supported Architectures 84
6.2 Types of Kernel Probes 84
6.3 Kernel probes API 85
6.4 Debugfs Interface 86
6.5 For More Information 87

7 Perfmon2—Hardware-Based Performance Monitoring 89

7.1 Conceptual Overview 89
7.2 Installation 91
7.3 Using Perfmon 92
7.4 Retrieving Metrics From DebugFS 95
7.5 For More Information 98

8 OProfile—System-Wide Profiler 101

8.1 Conceptual Overview 101
8.2 Installation and Requirements 102
8.3 Available OProfile Utilities 102
8.4 Using OProfile 102
8.5 Using OProfile's GUI 105
8.6 Generating Reports 106
8.7 For More Information 106

IV Resource Management 109

9 General System Resource Management 111

9.1 Planning the Installation 111
9.2 Disabling Unnecessary Services 113
9.3 File Systems and Disk Access 114

10 Kernel Control Groups 117

10.1 Technical Overview and Definitions 117
10.2 Scenario 118
10.3 Control Group Subsystems 119
10.4 Using Controller Groups 122
10.5 For More Information 124

11 Power Management 127

11.1 Power Management at CPU Level 127
11.2 The Linux Kernel CPUfreq Infrastructure 130
11.3 Viewing, Monitoring and Tuning Power-related Settings 133
11.4 Special Tuning Options 138
11.5 Creating and Using Power Management Profiles 141
11.6 Troubleshooting 142
11.7 For More Information 143

V Kernel Tuning 145

12 Installing Multiple Kernel Versions 147

12.1 Enabling and Configuring Multiversion Support 148
12.2 Installing/Removing Multiple Kernel Versions with YaST 149
12.3 Installing/Removing Multiple Kernel Versions with zypper 150

13 Tuning I/O Performance 153

13.1 Switching I/O Scheduling 153
13.2 Available I/O Elevators 154
13.3 I/O Barrier Tuning 156

14 Tuning the Task Scheduler 157

14.1 Introduction 157
14.2 Process Classification 158
14.3 O(1) Scheduler 159
14.4 Completely Fair Scheduler 160
14.5 For More Information 168

15 Tuning the Memory Management Subsystem 171

15.1 Memory Usage 172
15.2 Reducing Memory Usage 174
15.3 Virtual Memory Manager (VM) Tunable Parameters 175
15.4 Non-Uniform Memory Access (NUMA) 177
15.5 Monitoring VM Behavior 178

16 Tuning the Network 179

16.1 Configurable Kernel Socket Buffers 179
16.2 Detecting Network Bottlenecks and Analyzing Network Traffic 181
16.3 Netfilter 181
16.4 For More Information 182

VI Handling System Dumps 183

17 Tracing Tools 185

17.1 Tracing System Calls with strace 185
17.2 Tracing Library Calls with ltrace 189

17.3 Debugging and Profiling with Valgrind 190
17.4 For More Information 195

18 kexec and kdump 197

18.1 Introduction 197
18.2 Required Packages 198
18.3 kexec Internals 198
18.4 Basic kexec Usage 199
18.5 How to Configure kexec for Routine Reboots 200
18.6 Basic kdump Configuration 201
18.7 Analyzing the Crash Dump 204
18.8 Advanced kdump Configuration 209
18.9 For More Information 210

A Licences GNU 211

A.1 GNU General Public License 211
A.2 GNU Free Documentation License 214

About This Guide

openSUSE is used for a broad range of usage scenarios in enterprise and scientific data centers. SUSE has ensured openSUSE is set up in a way that it accommodates different operation purposes with optimal performance. However, openSUSE must meet very different demands when employed on a number crunching server compared to a file server, for example.

Generally it is not possible to ship a distribution that will by default be optimized for all kinds of workloads. Due to the simple fact that different workloads vary substantially in various aspects—most importantly I/O access patterns, memory access patterns, and process scheduling. A behavior that perfectly suits a certain workload might t reduce performance of a completely different workload (for example, I/O intensive databases usually have completely different requirements compared to CPU-intensive tasks, such as video encoding). The great versatility of Linux makes it possible to configure your system in a way that it brings out the best in each usage scenario.

This manual introduces you to means to monitor and analyze your system. It describes methods to manage system resources and to tune your system. This guide does *not* offer recipes for special scenarios, because each server has got its own different demands. It rather enables you to thoroughly analyze your servers and make the most out of them.

General Notes on System Tuning
: Tuning a system requires a carefully planned proceeding. Learn which steps are necessary to successfully improve your system.

Partie II, « System Monitoring » (p. 7)
: Linux offers a large variety of tools to monitor almost every aspect of the system. Learn how to use these utilities and how to read and analyze the system log files.

Partie III, « Kernel Monitoring » (p. 67)
: The Linux kernel itself offers means to examine every nut, bolt and screw of the system. This part introduces you to SystemTap, a scripting language for writing kernel modules that can be used to analyze and filter data. Collect debugging information and find bottlenecks by using kernel probes and use perfmon2 to access the CPU's performance monitoring unit. Last, monitor applications with the help of Oprofile.

Partie IV, « Resource Management » (p. 109)
: Learn how to set up a tailor-made system fitting exactly the server's need. Get to know how to use power management while at the same time keeping the performance of a system at a level that matches the current requirements.

Partie V, « Kernel Tuning » (p. 145)
: The Linux kernel can be optimized either by using sysctl or via the `/proc` file system. This part covers tuning the I/O performance and optimizing the way how Linux schedules processes. It also describes basic principles of memory management and shows how memory management could be fine-tuned to suit needs of specific applications and usage patterns. Furthermore, it describes how to optimize network performance.

Partie VI, « Handling System Dumps » (p. 183)
: This part enables you to analyze and handle application or system crashes. It introduces tracing tools such as strace or ltrace and describes how to handle system crashes using Kexec and Kdump.

Many chapters in this manual contain links to additional documentation resources. This includes additional documentation that is available on the system as well as documentation available on the Internet.

For an overview of the documentation available for your product and the latest documentation updates, refer to `http://www.suse.com/documentation` or to the following section:

1 Documentation disponible

Nous fournissons des versions HTML et PDF de nos livres dans différentes langues. Les manuels suivants pour utilisateurs et administrateurs sont disponibles sur ce produit :

Start-Up (↑Start-Up)
: Guides you step-by-step through the installation of openSUSE from DVD, or from an ISO image, gives short introductions to the GNOME and KDE desktops including some key applications running on it. Also gives an overview of LibreOffice and its modules for writing texts, working with spreadsheets, or creating graphics and presentations.

Reference (↑Reference)
: Gives you a general understanding of openSUSE and covers advanced system administration tasks. It is intended mainly for system administrators and home users with basic system administration knowledge. It provides detailed information about advanced deployment scenarios, administration of your system, the interaction of key system components and the set-up of various network and file services openSUSE offers.

Security Guide (↑Security Guide)
: Introduces basic concepts of system security, covering both local and network security aspects. Shows how to make use of the product inherent security software like AppArmor (which lets you specify per program which files the program may read, write, and execute) or the auditing system that reliably collects information about any security-relevant events.

System Analysis and Tuning Guide (p. i)
: An administrator's guide for problem detection, resolution and optimization. Find how to inspect and optimize your system by means of monitoring tools and how to efficiently manage resources. Also contains an overview of common problems and solutions and of additional help and documentation resources.

Virtualization with KVM (↑Virtualization with KVM)
: This manual offers an introduction to setting up and managing virtualization with KVM (Kernel-based Virtual Machine) on openSUSE. Also shows how to manage VM Guests with `libvirt` and QEMU.

Find HTML versions of most product manuals in your installed system under `/usr/share/doc/manual` or in the help centers of your desktop. Find the latest documentation updates at `http://www.suse.com/documentation` where you can download PDF or HTML versions of the manuals for your product.

2 Remarques

Plusieurs voies pour vos remarques sont disponibles :

Bugs et demandes d'améliorations
: To report bugs for a product component, or to submit enhancement requests, please use `https://bugzilla.novell.com/`. For documentation bugs, submit a bug report for the component *Documentation* of the respective product.

Si Bugzilla est nouveau pour vous, vous trouverez, à coup sûr, les articles suivants intéressants :

- http://en.opensuse.org/openSUSE:Submitting_bug_reports
- http://en.opensuse.org/openSUSE:Bug_reporting_FAQ

Commentaires d'utilisateurs
: We want to hear your comments about and suggestions for this manual and the other documentation included with this product. Use the User Comments feature at the bottom of each page in the online documentation or go to http://www.suse.com/documentation/feedback.html and enter your comments there.

Mail
: For feedback on the documentation of this product, you can also send a mail to doc-team@suse.de. Make sure to include the document title, the product version and the publication date of the documentation. To report errors or suggest enhancements, provide a concise description of the problem and refer to the respective section number and page (or URL).

3 Conventions de la documentation

Les conventions typographiques suivantes sont utilisées dans ce manuel :

- `/etc/passwd` : noms des dossiers et des fichiers
- *`placeholder`* : remplacer *`placeholder`* avec la valeur actuelle
- `PATH` : la variable d'environnement PATH
- `ls`, `--help` : commandes, options et paramètres
- `user` : utilisateurs ou groupes
- Alt, Alt + F1: a key to press or a key combination; keys are shown in uppercase as on a keyboard
- *File*, *File* > *Save As*: menu items, buttons

- *Dancing Penguins* (Chapitre *Penguins*, ↑Un autre manuel) : Ceci est une référence à un chapitre dans un autre manuel.

4 À propos de la création de ce manuel

This book is written in Novdoc, a subset of DocBook (see http://www.docbook.org). The XML source files were validated by `xmllint`, processed by `xsltproc`, and converted into XSL-FO using a customized version of Norman Walsh's stylesheets. The final PDF is formatted through XEP from RenderX. The open source tools and the environment used to build this manual are available in the package `daps` that is shipped with openSUSE. The project's home page can be found at http://daps.sf.net/.

5 Code source

The source code of openSUSE is publicly available. Refer to http://en.opensuse.org/Source_code for download links and more information.

6 Remerciements

Avec beaucoup d'engagement, les développeurs de Linux coopèrent à échelle mondiale pour promouvoir le développement de Linux. Nous les remercions pour leurs efforts—cette distribution n'existerait pas sans eux. Nous remercions aussi Frank Zappa and Pawar. Remerciements spéciaux, bien sûr, à Linus Torvalds.

Have a lot of fun!

Votre équipe SUSE

Partie I. Basics

1 General Notes on System Tuning

This manual discusses how to find the reasons for performance problems and provides means to solve these problems. Before you start tuning your system, you should make sure you have ruled out common problems and have found the cause (bottleneck) for the problem. You should also have a detailed plan on how to tune the system, because applying random tuning tips will not help (and could make things worse).

Procédure 1.1 *General Approach When Tuning a System*

1 Be sure what problem to solve

2 Rule out common problems

3 Find the bottleneck

3a Monitor the system and/or application

3b Analyze the data

4 Step-by-step tuning

1.1 Be Sure What Problem to Solve

Before you start tuning your system, try to describe the problem as exactly as possible. Obviously, a simple and general « The system is too slow! » is no helpful problem

description. If you plan to tune your Web server for faster delivery of static pages, for example, it makes a difference whether you need to generally improve the speed or whether it only needs to be improved at peak times.

Furthermore, make sure you can apply a measurement to your problem, otherwise you will not be able to control if the tuning was a success or not. You should always be able to compare « before » and « after ».

1.2 Rule Out Common Problems

A performance problem often is caused by network or hardware problems, bugs, or configuration issues. Make sure to rule out problems such as the ones listed below before attempting to tune your system:

- Check `/var/log/warn` and `/var/log/messages` for unusual entries.
- Check (using `top` or `ps`) whether a certain process misbehaves by eating up unusual amounts of CPU time or memory.
- Check for network problems by inspecting `/proc/net/dev`.
- In case of I/O problems with physical disks, make sure it is not caused by hardware problems (check the disk with the `smartmontools`) or by a full disk.
- Ensure that background jobs are scheduled to be carried out in times the server load is low. Those jobs should also run with low priority (set via `nice`).
- If the machine runs several services using the same resources, consider moving services to another server.
- Last, make sure your software is up-to-date.

1.3 Finding the Bottleneck

Finding the bottleneck very often is the hardest part when tuning a system. openSUSE offers a lot of tools helping you with this task. See Partie II, « System Monitoring » (p. 7) for detailed information on general system monitoring applications and log file analysis. If the problem requires a long-time in-depth analysis,

the Linux kernel offers means to perform such analysis. See Partie III, « Kernel Monitoring » (p. 67) for coverage.

Once you have collected the data, it needs to be analyzed. First, inspect if the server's hardware (memory, CPU, bus) and its I/O capacities (disk, network) are sufficient. If these basic conditions are met, the system might benefit from tuning.

1.4 Step-by-step Tuning

Make sure to carefully plan the tuning itself. It is of vital importance to only do one step at a time. Only by doing so you will be able to measure if the change provided an improvement or even had a negative impact. Each tuning activity should be measured over a sufficient time period in order to ensure you can do an analysis based on significant data. If you cannot measure a positive effect, do not make the change permanent. Chances are, that it might have a negative effect in the future.

Partie II. System Monitoring

2

System Monitoring Utilities

There are number of programs, tools, and utilities which you can use to examine the status of your system. This chapter introduces some of them and describes their most important and frequently used parameters.

For each of the described commands, examples of the relevant outputs are presented. In the examples, the first line is the command itself (after the > or # sign prompt). Omissions are indicated with square brackets (`[...]`) and long lines are wrapped where necessary. Line breaks for long lines are indicated by a backslash (`\`).

```
# command -x -y
output line 1
output line 2
output line 3 is annoyingly long, so long that \
    we have to break it
output line 3
[...]
output line 98
output line 99
```

The descriptions have been kept short so that we can include as many utilities as possible. Further information for all the commands can be found in the manual pages. Most of the commands also understand the parameter `--help`, which produces a brief list of possible parameters.

2.1 Multi-Purpose Tools

While most of the Linux system monitoring tools are specific to monitor a certain aspect of the system, there are a few « swiss army knife » tools showing various

aspects of the system at a glance. Use these tools first in order to get an overview and find out which part of the system to examine further.

2.1.1 vmstat

vmstat collects information about processes, memory, I/O, interrupts and CPU. If called without a sampling rate, it displays average values since the last reboot. When called with a sampling rate, it displays actual samples:

Exemple 2.1 *vmstat Output on a Lightly Used Machine*

```
tux@mercury:~> vmstat -a 2
procs -----------memory---------- ---swap-- -----io---- -system-- -----cpu-------
 r  b   swpd   free  inact active   si   so    bi    bo   in   cs us sy  id wa st
 0  0      0 750992 570648 548848    0    0     0     1    8    9  0  0 100  0  0
 0  0      0 750984 570648 548912    0    0     0     0   63   48  1  0 99   0  0
 0  0      0 751000 570648 548912    0    0     0     0   55   47  0  0 100  0  0
 0  0      0 751000 570648 548912    0    0     0     0   56   50  0  0 100  0  0
 0  0      0 751016 570648 548944    0    0     0     0   57   50  0  0 100  0  0
```

Exemple 2.2 *vmstat Output on a Heavily Used Machine (CPU bound)*

```
tux@mercury:~> vmstat 2
procs -----------memory---------- ---swap-- -----io---- -system-- -----cpu------
 r  b   swpd   free   buff   cache   si   so    bi    bo   in   cs us sy id wa st
32  1  26236 459640 110240 6312648    0    0  9944     2 4552 6597 95  5  0  0  0
23  1  26236 396728 110336 6136224    0    0  9588     0 4468 6273 94  6  0  0  0
35  0  26236 554920 110508 6166508    0    0  7684 27992 4474 4700 95  5  0  0  0
28  0  26236 518184 110516 6039996    0    0 10830     4 4446 4670 94  6  0  0  0
21  5  26236 716468 110684 6074872    0    0  8734 20534 4512 4061 96  4  0  0  0
```

ASTUCE

The first line of the vmstat output always displays average values since the last reboot.

The columns show the following:

r

Shows the amount of processes in the run queue. These processes are waiting for a free CPU slot to be executed. If the number of processes in this column is constantly higher than the number of CPUs available, this is an indication for insufficient CPU power.

b

Shows the amount of processes waiting for a resource other than a CPU. A high number in this column may indicate an I/O problem (network or disk).

swpd

The amount of swap space (KB) currently used.

free

The amount of unused memory (KB).

inact

Recently unused memory that can be reclaimed. This column is only visible when calling `vmstat` with the parameter `-a` (recommended).

active

Recently used memory that normally does not get reclaimed. This column is only visible when calling `vmstat` with the parameter `-a` (recommended).

buff

File buffer cache (KB) in RAM. This column is not visible when calling `vmstat` with the parameter `-a` (recommended).

cache

Page cache (KB) in RAM. This column is not visible when calling `vmstat` with the parameter `-a` (recommended).

si

Amount of data (KB) that is moved from swap to RAM per second. High values over a longer period of time in this column are an indication that the machine would benefit from more RAM.

so

Amount of data (KB) that is moved from RAM to swap per second. High values over a longer period of time in this column are an indication that the machine would benefit from more RAM.

bi

Number of blocks per second received from a block device (e.g. a disk read). Note that swapping also impacts the values shown here.

bo

Number of blocks per second sent to a block device (e.g. a disk write). Note that swapping also impacts the values shown here.

in

Interrupts per second. A high value indicates a high I/O level (network and/or disk).

cs

Number of context switches per second. Simplified this means that the kernel has to replace executable code of one program in memory with that of another program.

us

Percentage of CPU usage from user processes.

sy

Percentage of CPU usage from system processes.

id

Percentage of CPU time spent idling. If this value is zero over a longer period of time, your CPU(s) are working to full capacity. This is not necessarily a bad sign —rather refer to the values in columns *r* and *b* to determine if your machine is equipped with sufficient CPU power.

wa

If "wa" time is non-zero, it indicates throughput lost due to waiting for I/O. This may be inevitable, for example, if a file is being read for the first time, background writeback cannot keep up, and so on. It can also be an indicator for a hardware bottleneck (network or hard disk). A last, it can indicate a potential for tuning the virtual memory manager (refer to Chapitre 15, *Tuning the Memory Management Subsystem* (p. 171)).

st

Percentage of CPU time used by virtual machines.

See `vmstat --help` for more options.

2.1.2 System Activity Information: sar and sadc

`sar` can generate extensive reports on almost all important system activities, among them CPU, memory, IRQ usage, IO, or networking. It can either generate reports on the fly or query existing reports gathered by the system activity data collector (`sadc`). `sar` and `sadc` both gather all their data from the `/proc` file system.

REMARQUE : sysstat Package

`sar` and `sadc` are part of `sysstat` package. You need to install the package either with YaST, or with `zypper in sysstat`.

2.1.2.1 Automatically Collecting Daily Statistics With sadc

If you want to monitor your system about a longer period of time, use `sadc` to automatically collect the data. You can read this data at any time using `sar`. To start `sadc`, simply run `/etc/init.d/boot.sysstat start`. This will add a link to `/etc/cron.d/` that calls `sadc` with the following default configuration:

- All available data will be collected.
- Data is written to `/var/log/sa/saDD`, where *DD* stands for the current day. If a file already exists, it will be archived.
- The summary report is written to `/var/log/sa/sarDD`, where *DD* stands for the current day. Already existing files will be archived.
- Data is collected every ten minutes, a summary report is generated every 6 hours (see /etc/sysstat/sysstat.cron).
- The data is collected by the `/usr/lib64/sa/sa1` script (or `/usr/lib/sa/sa1` on 32bit systems)
- The summaries are generated by the script `/usr/lib64/sa/sa2` (or `/usr/lib/sa/sa2` on 32bit systems)

If you need to customize the configuration, copy the `sa1` and `sa2` scripts and adjust them according to your needs. Replace the link `/etc/cron.d/sysstat` with a customized copy of `/etc/sysstat/sysstat.cron` calling your scripts.

2.1.2.2 Generating reports with sar

To generate reports on the fly, call `sar` with an interval (seconds) and a count. To generate reports from files specify a filename with the option `-f` instead of interval and count. If filename, interval and count are not specified, `sar` attempts to generate a report from `/var/log/sa/saDD`, where *DD* stands for the current day. This is

the default location to where `sadc` writes its data. Query multiple files with multiple -f options.

```
sar 2 10                          # on-the-fly report, 10 times every 2
 seconds
sar -f ~/reports/sar_2010_05_03  # queries file sar_2010_05_03
sar                               # queries file from today in /var/log/sa/
cd /var/log/sa &&\
sar -f sa01 -f sa02               # queries files /var/log/sa/0[12]
```

Find examples for useful `sar` calls and their interpretation below. For detailed information on the meaning of each column, please refer to the `man (1)` of `sar`. Also refer to the man page for more options and reports—`sar` offers plenty of them.

CPU Utilization Report: sar

When called with no options, `sar` shows a basic report about CPU usage. On multiprocessor machines, results for all CPUs are summarized. Use the option `-P ALL` to also see statistics for individual CPUs.

```
mercury:~ # sar 10 5
Linux 2.6.31.12-0.2-default (mercury) 03/05/10   _x86_64_   (2 CPU)

14:15:43   CPU    %user   %nice   %system   %iowait    %steal     %idle
14:15:53   all    38.55    0.00      6.10      0.10      0.00     55.25
14:16:03   all    12.59    0.00      4.90      0.33      0.00     82.18
14:16:13   all    56.59    0.00      8.16      0.44      0.00     34.81
14:16:23   all    58.45    0.00      3.00      0.00      0.00     38.55
14:16:33   all    86.46    0.00      4.70      0.00      0.00      8.85
Average:   all    49.94    0.00      5.38      0.18      0.00     44.50
```

If the value for *%iowait* (percentage of the CPU being idle while waiting for I/O) is significantly higher than zero over a longer period of time, there is a bottleneck in the I/O system (network or hard disk). If the *%idle* value is zero over a longer period of time, your CPU(s) are working to full capacity.

Memory Usage Report: sar `-r`

Generate an overall picture of the system memory (RAM) by using the option `-r`:

```
mercury:~ # sar -r 10 5
Linux 2.6.31.12-0.2-default (mercury) 03/05/10   _x86_64_   (2 CPU)

16:12:12 kbmemfree kbmemused %memused kbbuffers kbcached kbcommit %commit
16:12:22    548188   1507488    73.33     20524    64204  2338284   65.10
16:12:32    259320   1796356    87.39     20808    72660  2229080   62.06
16:12:42    381096   1674580    81.46     21084    75460  2328192   64.82
16:12:52    642668   1413008    68.74     21392    81212  1938820   53.98
16:13:02    311984   1743692    84.82     21712    84040  2212024   61.58
```

```
Average:    428651   1627025    79.15     21104    75515  2209280   61.51
```

The last two columns (*kbcommit* and *%commit*) show an approximation of the total amount of memory (RAM plus swap) the current workload would need in the worst case (in kilobyte or percent respectively).

Paging Statistics Report: sar -B

Use the option `-B` to display the kernel paging statistics.

```
mercury:~ # sar -B 10 5
Linux 2.6.31.12-0.2-default (mercury) 03/05/10   _x86_64_   (2 CPU)

16:11:43 pgpgin/s pgpgout/s   fault/s majflt/s  pgfree/s pgscank/s pgscand/s pgsteal/s  %vmeff
16:11:53   225.20    104.00  91993.90     0.00  87572.60      0.00      0.00      0.00    0.00
16:12:03   718.32    601.00  82612.01     2.20  99785.69    560.56    839.24   1132.23   80.89
16:12:13  1222.00   1672.40 103126.00     1.70 106529.00   1136.00    982.40   1172.20   55.33
16:12:23   112.18     77.84 113406.59     0.10  97581.24     35.13    127.74    159.38   97.86
16:12:33   817.22     81.28 121312.91     9.41 111442.44      0.00      0.00      0.00    0.00
Average:   618.72    507.20 102494.86     2.68 100578.98    346.24    389.76    492.60   66.93
```

The *majflt/s* (major faults per second) column shows how many pages are loaded from disk (swap) into memory. A large number of major faults slows down the system and is an indication of insufficient main memory. The *%vmeff* column shows the number of pages scanned (*pgscand/s*) in relation to the ones being reused from the main memory cache or the swap cache (*pgsteal/s*). It is a measurement of the efficiency of page reclaim. Healthy values are either near 100 (every inactive page swapped out is being reused) or 0 (no pages have been scanned). The value should not drop below 30.

Block Device Statistics Report: sar -d

Use the option `-d` to display the block device (hdd, optical drive, USB storage device, ...). Make sure to use the additional option `-p` (pretty-print) to make the *DEV* column readable.

```
mercury:~ # sar -d -p 10 5
Linux 2.6.31.12-0.2-default (neo)  03/05/10  _x86_64_ (2 CPU)

16:28:31  DEV    tps  rd_sec/s  wr_sec/s  avgrq-sz  avgqu-sz  await  svctm  %util
16:28:41  sdc  11.51     98.50    653.45     65.32      0.10   8.83   4.87   5.61
16:28:41 scd0   0.00      0.00      0.00      0.00      0.00   0.00   0.00   0.00

16:28:41  DEV    tps  rd_sec/s  wr_sec/s  avgrq-sz  avgqu-sz  await  svctm  %util
16:28:51  sdc  15.38    329.27    465.93     51.69      0.10   6.39   4.70   7.23
16:28:51 scd0   0.00      0.00      0.00      0.00      0.00   0.00   0.00   0.00

16:28:51  DEV    tps rd_sec/s  wr_sec/s  avgrq-sz  avgqu-sz  await  svctm  %util
16:29:01  sdc  32.47   876.72    647.35     46.94      0.33  10.20   3.67  11.91
```

```
16:29:01 scd0   0.00      0.00      0.00      0.00      0.00   0.00   0.00   0.00

16:29:01  DEV    tps rd_sec/s  wr_sec/s  avgrq-sz  avgqu-sz  await  svctm  %util
16:29:11  sdc  48.75  2852.45    366.77     66.04      0.82  16.93   4.91  23.94
16:29:11 scd0   0.00      0.00      0.00      0.00      0.00   0.00   0.00   0.00

16:29:11  DEV    tps rd_sec/s  wr_sec/s  avgrq-sz  avgqu-sz  await  svctm  %util
16:29:21  sdc  13.20   362.40    412.00     58.67      0.16  12.03   6.09   8.04
16:29:21 scd0   0.00      0.00      0.00      0.00      0.00   0.00   0.00   0.00

Average:  DEV    tps rd_sec/s  wr_sec/s  avgrq-sz  avgqu-sz  await  svctm  %util
Average:  sdc  24.26   903.52    509.12     58.23      0.30  12.49   4.68  11.34
Average: scd0   0.00      0.00      0.00      0.00      0.00   0.00   0.00   0.00
```

If your machine uses multiple disks, you will receive the best performance, if I/O requests are evenly spread over all disks. Compare the *Average* values for *tps*, *rd_sec/s*, and *wr_sec/s* of all disks. Constantly high values in the *svctm* and *%util* columns could be an indication that the amount of free space on the disk is insufficient.

Network Statistics Reports: sar `-n` *KEYWORD*

The option `-n` lets you generate multiple network related reports. Specify one of the following keywords along with the `-n`:

- *DEV*: Generates a statistic report for all network devices
- *EDEV*: Generates an error statistics report for all network devices
- *NFS*: Generates a statistic report for an NFS client
- *NFSD*: Generates a statistic report for an NFS server
- *SOCK*: Generates a statistic report on sockets
- *ALL*: Generates all network statistic reports

2.1.2.3 Visualizing sar Data

`sar` reports are not always easy to parse for humans. kSar, a Java application visualizing your `sar` data, creates easy-to-read graphs. It can even generate PDF reports. kSar takes data generated on the fly as well as past data from a file. kSar is licensed under the BSD license and is available from http://ksar.atomique.net/.

2.2 System Information

2.2.1 Device Load Information: iostat

`iostat` monitors the system device loading. It generates reports that can be useful for better balancing the load between physical disks attached to your system.

The first `iostat` report shows statistics collected since the system was booted. Subsequent reports cover the time since the previous report.

```
tux@mercury:~> iostat
Linux 2.6.32.7-0.2-default (geeko@buildhost)  02/24/10  _x86_64_

avg-cpu:  %user   %nice %system %iowait  %steal   %idle
           0,49    0,01    0,10    0,31    0,00   99,09

Device:            tps   Blk_read/s   Blk_wrtn/s   Blk_read   Blk_wrtn
sda               1,34         5,59        25,37    1459766    6629160
sda1              0,00         0,01         0,00       1519          0
sda2              0,87         5,11        17,83    1335365    4658152
sda3              0,47         0,47         7,54     122578    1971008
```

When invoked with the `-n` option, `iostat` adds statistics of network file systems (NFS) load. The option `-x` shows extended statistics information.

You can also specify which device should be monitored at what time intervals. For example, `iostat -p sda 3 5` will display five reports at three second intervals for device sda.

REMARQUE : sysstat Package

`iostat` is part of sysstat package. To use it, install the package with `zypper in sysstat`

2.2.2 Processor Activity Monitoring: mpstat

The utility `mpstat` examines activities of each available processor. If your system has one processor only, the global average statistics will be reported.

With the `-P` option, you can specify the number of processors to be reported (note that 0 is the first processor). The timing arguments work the same way as with the `iostat` command. Entering `mpstat -P 1 2 5` prints five reports for the second processor (number 1) at 2 second intervals.

```
tux@mercury:~> mpstat -P 1 2 5
Linux 2.6.32.7-0.2-default (geeko@buildhost)  02/24/10  _x86_64_
```

```
08:57:10  CPU    %usr   %nice    %sys %iowait    %irq   %soft  %steal  \
 %guest   %idle
08:57:12    1    4.46    0.00    5.94    0.50    0.00    0.00    0.00  \
 0.00   89.11
08:57:14    1    1.98    0.00    2.97    0.99    0.00    0.99    0.00  \
 0.00   93.07
08:57:16    1    2.50    0.00    3.00    0.00    0.00    1.00    0.00  \
 0.00   93.50
08:57:18    1   14.36    0.00    1.98    0.00    0.00    0.50    0.00  \
 0.00   83.17
08:57:20    1    2.51    0.00    4.02    0.00    0.00    2.01    0.00  \
 0.00   91.46
Average:    1    5.17    0.00    3.58    0.30    0.00    0.90    0.00  \
 0.00   90.05
```

2.2.3 Task Monitoring: pidstat

If you need to see what load a particular task applies to your system, use `pidstat` command. It prints activity of every selected task or all tasks managed by Linux kernel if no task is specified. You can also set the number of reports to be displayed and the time interval between them.

For example, `pidstat -C top 2 3` prints the load statistic for tasks whose command name includes the string « top ». There will be three reports printed at two second intervals.

```
tux@mercury:~> pidstat -C top 2 3
Linux 2.6.27.19-5-default (geeko@buildhost)  03/23/2009  _x86_64_

09:25:42 AM       PID    %usr %system  %guest    %CPU   CPU  Command
09:25:44 AM     23576   37.62   61.39    0.00   99.01     1  top

09:25:44 AM       PID    %usr %system  %guest    %CPU   CPU  Command
09:25:46 AM     23576   37.00   62.00    0.00   99.00     1  top

09:25:46 AM       PID    %usr %system  %guest    %CPU   CPU  Command
09:25:48 AM     23576   38.00   61.00    0.00   99.00     1  top

Average:          PID    %usr %system  %guest    %CPU   CPU  Command
Average:        23576   37.54   61.46    0.00   99.00     -  top
```

2.2.4 Kernel Ring Buffer: dmesg

The Linux kernel keeps certain messages in a ring buffer. To view these messages, enter the command `dmesg`:

```
tux@mercury:~> dmesg
```

```
[...]
end_request: I/O error, dev fd0, sector 0
subfs: unsuccessful attempt to mount media (256)
e100: eth0: e100_watchdog: link up, 100Mbps, half-duplex
NET: Registered protocol family 17
IA-32 Microcode Update Driver: v1.14 <tigran@veritas.com>
microcode: CPU0 updated from revision 0xe to 0x2e, date = 08112004
IA-32 Microcode Update Driver v1.14 unregistered
bootsplash: status on console 0 changed to on
NET: Registered protocol family 10
Disabled Privacy Extensions on device c0326ea0(lo)
IPv6 over IPv4 tunneling driver
powernow: This module only works with AMD K7 CPUs
bootsplash: status on console 0 changed to on
```

Older events are logged in the files `/var/log/messages` and `/var/log/warn`.

2.2.5 List of Open Files: lsof

To view a list of all the files open for the process with process ID *`PID`*, use `-p`. For example, to view all the files used by the current shell, enter:

```
tux@mercury:~> lsof -p $$
COMMAND  PID   USER   FD   TYPE DEVICE  SIZE/OFF NODE NAME
bash    5552 tux  cwd    DIR    3,3    1512 117619 /home/tux
bash    5552 tux  rtd    DIR    3,3     584      2 /
bash    5552 tux  txt    REG    3,3  498816  13047 /bin/bash
bash    5552 tux  mem    REG    0,0              0 [heap] (stat: No such
bash    5552 tux  mem    REG    3,3  217016 115687 /var/run/nscd/passwd
bash    5552 tux  mem    REG    3,3  208464  11867 /usr/lib/locale/en_GB.
[...]
bash    5552 tux  mem    REG    3,3     366   9720 /usr/lib/locale/en_GB.
bash    5552 tux  mem    REG    3,3   97165   8828 /lib/ld-2.3.6.so
bash    5552 tux    0u   CHR  136,5             7 /dev/pts/5
bash    5552 tux    1u   CHR  136,5             7 /dev/pts/5
bash    5552 tux    2u   CHR  136,5             7 /dev/pts/5
bash    5552 tux  255u   CHR  136,5             7 /dev/pts/5
```

The special shell variable `$$`, whose value is the process ID of the shell, has been used.

The command `lsof` lists all the files currently open when used without any parameters. There are often thousands of open files, therefore, listing all of them is rarely useful. However, the list of all files can be combined with search functions to generate useful lists. For example, list all used character devices:

```
tux@mercury:~> lsof | grep CHR
bash      3838     tux    0u      CHR  136,0                2 /dev/pts/0
bash      3838     tux    1u      CHR  136,0                2 /dev/pts/0
bash      3838     tux    2u      CHR  136,0                2 /dev/pts/0
```

```
bash      3838     tux  255u      CHR  136,0                2 /dev/pts/0
bash      5552     tux    0u      CHR  136,5                7 /dev/pts/5
bash      5552     tux    1u      CHR  136,5                7 /dev/pts/5
bash      5552     tux    2u      CHR  136,5                7 /dev/pts/5
bash      5552     tux  255u      CHR  136,5                7 /dev/pts/5
X         5646       root  mem       CHR    1,1            1006 /dev/mem
lsof      5673     tux    0u      CHR  136,5                7 /dev/pts/5
lsof      5673     tux    2u      CHR  136,5                7 /dev/pts/5
grep      5674     tux    1u      CHR  136,5                7 /dev/pts/5
grep      5674     tux    2u      CHR  136,5                7 /dev/pts/5
```

When used with `-i`, `lsof` lists currently open Internet files as well:

```
tux@mercury:~> lsof -i
[...]
pidgin     4349 tux   17r  IPv4  15194      0t0  TCP \
 jupiter.example.com:58542->www.example.net:https (ESTABLISHED)
pidgin     4349 tux   21u  IPv4  15583      0t0  TCP \
 jupiter.example.com:37051->aol.example.org:aol (ESTABLISHED)
evolution  4578 tux   38u  IPv4  16102      0t0  TCP \
 jupiter.example.com:57419->imap.example.com:imaps (ESTABLISHED)
npviewer.  9425 tux   40u  IPv4  24769      0t0  TCP \
 jupiter.example.com:51416->www.example.com:http (CLOSE_WAIT)
npviewer.  9425 tux   49u  IPv4  24814      0t0  TCP \
 jupiter.example.com:43964->www.example.org:http (CLOSE_WAIT)
ssh       17394 tux    3u  IPv4  40654      0t0  TCP \
 jupiter.example.com:35454->saturn.example.com:ssh (ESTABLISHED)
```

2.2.6 Kernel and udev Event Sequence Viewer: udevadm monitor

`udevadm monitor` listens to the kernel uevents and events sent out by a udev rule and prints the device path (DEVPATH) of the event to the console. This is a sequence of events while connecting a USB memory stick:

REMARQUE : Monitoring udev Events

Only root user is allowed to monitor udev events by running the `udevadm` command.

```
UEVENT[1138806687] add@/devices/pci0000:00/0000:00:1d.7/usb4/4-2/4-2.2
UEVENT[1138806687] add@/devices/pci0000:00/0000:00:1d.7/usb4/4-2/4-2.2/4-2.2
UEVENT[1138806687] add@/class/scsi_host/host4
UEVENT[1138806687] add@/class/usb_device/usbdev4.10
UDEV  [1138806687] add@/devices/pci0000:00/0000:00:1d.7/usb4/4-2/4-2.2
UDEV  [1138806687] add@/devices/pci0000:00/0000:00:1d.7/usb4/4-2/4-2.2/4-2.2
UDEV  [1138806687] add@/class/scsi_host/host4
UDEV  [1138806687] add@/class/usb_device/usbdev4.10
UEVENT[1138806692] add@/devices/pci0000:00/0000:00:1d.7/usb4/4-2/4-2.2/4-2.2
```

```
UEVENT[1138806692] add@/block/sdb
UEVENT[1138806692] add@/class/scsi_generic/sg1
UEVENT[1138806692] add@/class/scsi_device/4:0:0:0
UDEV  [1138806693] add@/devices/pci0000:00/0000:00:1d.7/usb4/4-2/4-2.2/4-2.2
UDEV  [1138806693] add@/class/scsi_generic/sg1
UDEV  [1138806693] add@/class/scsi_device/4:0:0:0
UDEV  [1138806693] add@/block/sdb
UEVENT[1138806694] add@/block/sdb/sdb1
UDEV  [1138806694] add@/block/sdb/sdb1
UEVENT[1138806694] mount@/block/sdb/sdb1
UEVENT[1138806697] umount@/block/sdb/sdb1
```

2.2.7 Information on Security Events: audit

The Linux audit framework is a complex auditing system that collects detailed information about all security related events. These records can be consequently analyzed to discover if, for example, a violation of security policies occurred.

2.2.8 Server Resources Used by X11 Clients: xrestop

`xrestop` provides statistics for each connected X11 client's server-side resource. The output is very similar to Section 2.3.4, « Table of Processes: `top` » (p. 24).

```
xrestop - Display: localhost:0
          Monitoring 40 clients. XErrors: 0
          Pixmaps:   42013K total, Other:     206K total, All:   42219K
 total

res-base Wins  GCs Fnts Pxms Misc   Pxm mem  Other   Total   PID Identifier
3e00000   385   36    1  751  107    18161K     13K  18175K   ?   NOVELL: SU
4600000   391  122    1 1182  889     4566K     33K   4600K   ?   amaroK - S
1600000    35   11    0   76  142     3811K      4K   3816K   ?   KDE Deskto
3400000    52   31    1   69   74     2816K      4K   2820K   ?   Linux Shel
2c00000    50   25    1   43   50     2374K      3K   2378K   ?   Linux Shel
2e00000    50   10    1   36   42     2341K      3K   2344K   ?   Linux Shel
2600000    37   24    1   34   50     1772K      3K   1775K   ?   Root - Kon
4800000    37   24    1   34   49     1772K      3K   1775K   ?   Root - Kon
2a00000   209   33    1  323  238     1111K     12K   1123K   ?   Trekstor25
1800000   182   32    1  302  285     1039K     12K   1052K   ?   kicker
1400000   157  121    1  231  477      777K     18K    796K   ?   kwin
3c00000   175   36    1  248  168      510K      9K    520K   ?   de.comp.la
3a00000   326   42    1  579  444      486K     20K    506K   ?   [opensuse-
0a00000    85   38    1  317  224      102K      9K    111K   ?   Kopete
4e00000    25   17    1   60   66       63K      3K     66K   ?   YaST Contr
```

```
2400000    11   10    0   56   51       53K      1K     55K 22061 suseplugge
0e00000    20   12    1   50   92       50K      3K     54K 22016 kded
3200000     6   41    5   72   84       40K      8K     48K   ?   EMACS
2200000    54    9    1   30   31       42K      3K     45K   ?   SUSEWatche
4400000     2   11    1   30   34       34K      2K     36K 16489 kdesu
1a00000   255    7    0   42   11       19K      6K     26K   ?   KMix
3800000     2   14    1   34   37       21K      2K     24K 22242 knotify
1e00000    10    7    0   42    9       15K    624B     15K   ?   KPowersave
3600000   106    6    1   30    9        7K      3K     11K 22236 konqueror
2000000    10    5    0   21   34        9K      1K     10K   ?   klipper
3000000    21    7    0   11    9        7K    888B      8K   ?   KDE Wallet
```

2.3 Processes

2.3.1 Interprocess Communication: ipcs

The command `ipcs` produces a list of the IPC resources currently in use:

```
------ Shared Memory Segments --------
key        shmid      owner     perms      bytes      nattch     status
0x00000000 58261504   tux     600        393216     2          dest
0x00000000 58294273   tux     600        196608     2          dest
0x00000000 83886083   tux     666        43264      2
0x00000000 83951622   tux     666        192000     2
0x00000000 83984391   tux     666        282464     2
0x00000000 84738056   root  644        151552     2          dest

------ Semaphore Arrays --------
key        semid      owner     perms      nsems
0x4d038abf 0          tux     600        8

------ Message Queues --------
key        msqid      owner      perms      used-bytes   messages
```

2.3.2 Process List: ps

The command `ps` produces a list of processes. Most parameters must be written without a minus sign. Refer to `ps --help` for a brief help or to the man page for extensive help.

To list all processes with user and command line information, use `ps axu`:

```
tux@mercury:~> ps axu
USER       PID %CPU %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root         1  0.0  0.0    696   272 ?        S    12:59   0:01 init [5]
root         2  0.0  0.0      0     0 ?        SN   12:59   0:00 [ksoftirqd
```

```
root         3  0.0  0.0      0     0 ?        S<   12:59   0:00 [events
[...]
tux     4047  0.0  6.0 158548 31400 ?        Ssl  13:02   0:06 mono-best
tux     4057  0.0  0.7   9036  3684 ?        Sl   13:02   0:00 /opt/gnome
tux     4067  0.0  0.1   2204   636 ?        S    13:02   0:00 /opt/gnome
tux     4072  0.0  1.0  15996  5160 ?        Ss   13:02   0:00 gnome-scre
tux     4114  0.0  3.7 130988 19172 ?        SLl  13:06   0:04 sound-juic
tux     4818  0.0  0.3   4192  1812 pts/0    Ss   15:59   0:00 -bash
tux     4959  0.0  0.1   2324   816 pts/0    R+   16:17   0:00 ps axu
```

To check how many `sshd` processes are running, use the option `-p` together with the command `pidof`, which lists the process IDs of the given processes.

```
tux@mercury:~> ps -p $(pidof sshd)
  PID TTY      STAT   TIME COMMAND
 3524 ?        Ss     0:00 /usr/sbin/sshd -o PidFile=/var/run/sshd.init.pid
 4813 ?        Ss     0:00 sshd: tux [priv]
 4817 ?        R      0:00 sshd: tux@pts/0
```

The process list can be formatted according to your needs. The option `-L` returns a list of all keywords. Enter the following command to issue a list of all processes sorted by memory usage:

```
tux@mercury:~> ps ax --format pid,rss,cmd --sort rss
  PID   RSS CMD
    2     0 [ksoftirqd/0]
    3     0 [events/0]
    4     0 [khelper]
    5     0 [kthread]
   11     0 [kblockd/0]
   12     0 [kacpid]
  472     0 [pdflush]
  473     0 [pdflush]
[...]
 4028 17556 nautilus --no-default-window --sm-client-id default2
 4118 17800 ksnapshot
 4114 19172 sound-juicer
 4023 25144 gnome-panel --sm-client-id default1
```

Useful `ps` Calls

`ps aux --sort` *`column`*

Sort the output by *`column`*. Replace *`column`* with

`pmem` for physical memory ratio
`pcpu` for CPU ratio
`rss` for resident set size (non-swapped physical memory)

`ps axo pid,%cpu,rss,vsz,args,wchan`

Shows every process, their PID, CPU usage ratio, memory size (resident and virtual), name, and their syscall.

`ps axfo pid,args`
Show a process tree.

2.3.3 Process Tree: pstree

The command `pstree` produces a list of processes in the form of a tree:

```
tux@mercury:~> pstree
init-+-NetworkManagerD
     |-acpid
     |-3*[automount]
     |-cron
     |-cupsd
     |-2*[dbus-daemon]
     |-dbus-launch
     |-dcopserver
     |-dhcpcd
     |-events/0
     |-gpg-agent
     |-hald-+-hald-addon-acpi
     |      `-hald-addon-stor
     |-kded
     |-kdeinit-+-kdesu---su---kdesu_stub---yast2---y2controlcenter
     |         |-kio_file
     |         |-klauncher
     |         |-konqueror
     |         |-konsole-+-bash---su---bash
     |         |         `-bash
     |         `-kwin
     |-kdesktop---kdesktop_lock---xmatrix
     |-kdesud
     |-kdm-+-X
     |     `-kdm---startkde---kwrapper
[...]
```

The parameter `-p` adds the process ID to a given name. To have the command lines displayed as well, use the `-a` parameter:

2.3.4 Table of Processes: top

The command `top`, which stands for `table of processes`, displays a list of processes that is refreshed every two seconds. To terminate the program, press Q. The parameter `-n 1` terminates the program after a single display of the process list. The following is an example output of the command `top -n 1`:

```
tux@mercury:~> top -n 1
```

```
top - 17:06:28 up  2:10,  5 users,  load average: 0.00, 0.00, 0.00
Tasks:  85 total,   1 running,  83 sleeping,   1 stopped,   0 zombie
Cpu(s):  5.5% us,  0.8% sy,  0.8% ni, 91.9% id,  1.0% wa,  0.0% hi,  0.0% si
Mem:    515584k total,   506468k used,     9116k free,    66324k buffers
Swap:   658656k total,        0k used,   658656k free,   353328k cached

  PID USER      PR  NI  VIRT  RES  SHR S %CPU %MEM    TIME+  COMMAND
    1 root      16   0   700  272  236 S  0.0  0.1   0:01.33 init
    2 root      34  19     0    0    0 S  0.0  0.0   0:00.00 ksoftirqd/0
    3 root      10  -5     0    0    0 S  0.0  0.0   0:00.27 events/0
    4 root      10  -5     0    0    0 S  0.0  0.0   0:00.01 khelper
    5 root      10  -5     0    0    0 S  0.0  0.0   0:00.00 kthread
   11 root      10  -5     0    0    0 S  0.0  0.0   0:00.05 kblockd/0
   12 root      20  -5     0    0    0 S  0.0  0.0   0:00.00 kacpid
  472 root      20   0     0    0    0 S  0.0  0.0   0:00.00 pdflush
  473 root      15   0     0    0    0 S  0.0  0.0   0:00.06 pdflush
  475 root      11  -5     0    0    0 S  0.0  0.0   0:00.00 aio/0
  474 root      15   0     0    0    0 S  0.0  0.0   0:00.07 kswapd0
  681 root      10  -5     0    0    0 S  0.0  0.0   0:00.01 kseriod
  839 root      10  -5     0    0    0 S  0.0  0.0   0:00.02 reiserfs/0
  923 root      13  -4  1712  552  344 S  0.0  0.1   0:00.67 udevd
 1343 root      10  -5     0    0    0 S  0.0  0.0   0:00.00 khubd
 1587 root      20   0     0    0    0 S  0.0  0.0   0:00.00 shpchpd_event
 1746 root      15   0     0    0    0 S  0.0  0.0   0:00.00 w1_control
 1752 root      15   0     0    0    0 S  0.0  0.0   0:00.00 w1_bus_master1
 2151 root      16   0  1464  496  416 S  0.0  0.1   0:00.00 acpid
 2165 messageb  16   0  3340 1048  792 S  0.0  0.2   0:00.64 dbus-daemon
 2166 root      15   0  1840  752  556 S  0.0  0.1   0:00.01 syslog-ng
 2171 root      16   0  1600  516  320 S  0.0  0.1   0:00.00 klogd
 2235 root      15   0  1736  800  652 S  0.0  0.2   0:00.10 resmgrd
 2289 root      16   0  4192 2852 1444 S  0.0  0.6   0:02.05 hald
 2403 root      23   0  1756  600  524 S  0.0  0.1   0:00.00 hald-addon-acpi
 2709 root      19   0  2668 1076  944 S  0.0  0.2   0:00.00 NetworkManagerD
 2714 root      16   0  1756  648  564 S  0.0  0.1   0:00.56 hald-addon-stor
```

By default the output is sorted by CPU usage (column *%CPU*, shortcut Maj + P). Use following shortcuts to change the sort field:

Maj + M: Resident Memory (*RES*)
Maj + N: Process ID (*PID*)
Maj + T: Time (*TIME+*)

To use any other field for sorting, press F and select a field from the list. To toggle the sort order, Use Maj + R.

The parameter `-U` *`UID`* monitors only the processes associated with a particular user. Replace *`UID`* with the user ID of the user. Use `top -U $(id -u)` to show processes of the current user

2.3.5 A top-like I/O Monitor: iotop

The `iotop` utility displays a table of I/O usage by processes or threads.

ASTUCE

`iotop` is not installed by default. You need to install it manually with `zypper in iotop` as `root`.

`iotop` displays columns for the I/O bandwidth read and written by each process during the sampling period. It also displays the percentage of time the process spent while swapping in and while waiting on I/O. For each process, its I/O priority (class/level) is shown. In addition, the total I/O bandwidth read and written during the sampling period is displayed at the top of the interface.

Use the left and right arrows to change the sorting, R to reverse the sorting order, O to toggle the `--only` option, P to toggle the `--processes` option, A to toggle the `--accumulated` option, Q to quit or I to change the priority of a thread or a process' thread(s). Any other key will force a refresh.

Following is an example output of the command `iotop --only`, while `find` and `emacs` are running:

```
tux@mercury:~> iotop --only
Total DISK READ: 50.61 K/s | Total DISK WRITE: 11.68 K/s
  TID  PRIO  USER     DISK READ  DISK WRITE  SWAPIN     IO>    COMMAND
 3416 be/4 ke         50.61 K/s    0.00 B/s  0.00 %  4.05 % find /
  275 be/3 root        0.00 B/s    3.89 K/s  0.00 %  2.34 % [jbd2/sda2-8]
 5055 be/4 ke          0.00 B/s    3.89 K/s  0.00 %  0.04 % emacs
```

`iotop` can be also used in a batch mode (`-b`) and its output stored in a file for later analysis. For a complete set of options, see the manual page (`man 1 iotop`).

2.3.6 Modify a process' niceness: nice and renice

The kernel determines which processes require more CPU time than others by the process' nice level, also called niceness. The higher the « nice » level of a process is, the less CPU time it will take from other processes. Nice levels range from -20 (the least « nice » level) to 19. Negative values can only be set by `root`.

Adjusting the niceness level is useful when running a non time-critical process that lasts long and uses large amounts of CPU time, such as compiling a kernel on a system that also performs other tasks. Making such a process « nicer », ensures that the other tasks, for example a Web server, will have a higher priority.

Calling `nice` without any parameters prints the current niceness:

```
tux@mercury:~> nice
0
```

Running `nice` *`command`* increments the current nice level for the given command by 10. Using `nice -n` *`level command`* lets you specify a new niceness relative to the current one.

To change the niceness of a running process, use `renice` *`priority`* `-p` *`process id`*, for example:

```
renice +5 3266
```

To renice all processes owned by a specific user, use the option `-u` *`user`*. Process groups are reniced by the option `-g` *`process group id`*.

2.4 Memory

2.4.1 Memory Usage: free

The utility `free` examines RAM and swap usage. Details of both free and used memory and swap areas are shown:

```
tux@mercury:~> free
             total       used       free     shared    buffers     cached
Mem:       2062844    2047444      15400          0     129580     921936
-/+ buffers/cache:     995928    1066916
Swap:      2104472          0    2104472
```

The options `-b`, `-k`, `-m`, `-g` show the output in bytes, KB, MB, or GB, respectively. The parameter `-d delay` ensures that the display is refreshed every *`delay`* seconds. For example, `free -d 1.5` produces an update every 1.5 seconds.

2.4.2 Detailed Memory Usage: /proc/meminfo

Use `/proc/meminfo` to get more detailed information on memory usage than with `free`. Actually `free` uses some of the data from this file. See an example output from a 64bit system below. Note that it slightly differs on 32bit systems due to different memory management):

```
tux@mercury:~> cat /proc/meminfo
MemTotal:        8182956 kB
MemFree:         1045744 kB
Buffers:          364364 kB
Cached:          5601388 kB
SwapCached:         1936 kB
Active:          4048268 kB
Inactive:        2674796 kB
Active(anon):     663088 kB
Inactive(anon):   107108 kB
Active(file):    3385180 kB
Inactive(file):  2567688 kB
Unevictable:           4 kB
Mlocked:               4 kB
SwapTotal:       2096440 kB
SwapFree:        2076692 kB
Dirty:                44 kB
Writeback:             0 kB
AnonPages:        756108 kB
Mapped:           147320 kB
Slab:             329216 kB
SReclaimable:     300220 kB
SUnreclaim:        28996 kB
PageTables:        21092 kB
NFS_Unstable:          0 kB
Bounce:                0 kB
WritebackTmp:          0 kB
CommitLimit:     6187916 kB
Committed_AS:    1388160 kB
VmallocTotal:   34359738367 kB
VmallocUsed:      133384 kB
VmallocChunk:   34359570939 kB
HugePages_Total:       0
HugePages_Free:        0
HugePages_Rsvd:        0
HugePages_Surp:        0
Hugepagesize:       2048 kB
DirectMap4k:     2689024 kB
DirectMap2M:     5691392 kB
```

The most important entries are:

MemTotal
: Total amount of usable RAM

MemFree
: Total amount of unused RAM

Buffers
: File buffer cache in RAM

Cached
: Page cache (excluding buffer cache) in RAM

SwapCached
: Page cache in swap

Active
: Recently used memory that normally is not reclaimed. This value is the sum of memory claimed by anonymous pages (listed as *Active(anon)*) and file-backed pages (listed as *Active(file)*)

Inactive
: Recently unused memory that can be reclaimed. This value is the sum of memory claimed by anonymous pages (listed as *Inactive(anon)*) and file-backed pages (listed as *Inactive(file)*).

SwapTotal
: Total amount of swap space

SwapFree
: Total amount of unused swap space

Dirty
: Amount of memory that will be written to disk

Writeback
: Amount of memory that currently is written to disk

Mapped
: Memory claimed with the nmap command

Slab
: Kernel data structure cache

SReclaimable
: Reclaimable slab caches (inode, dentry, etc.)

Committed_AS
: An approximation of the total amount of memory (RAM plus swap) the current workload needs in the worst case.

2.4.3 Process Memory Usage: smaps

Exactly determining how much memory a certain process is consuming is not possible with standard tools like `top` or `ps`. Use the smaps subsystem, introduced in Kernel 2.6.14, if you need exact data. It can be found at `/proc/`*`pid`*`/smaps` and shows you the number of clean and dirty memory pages the process with the ID *`PID`* is using at that time. It differentiates between shared and private memory, so you are able to see how much memory the process is using without including memory shared with other processes.

2.5 Networking

2.5.1 Show the Network Status: netstat

`netstat` shows network connections, routing tables (`-r`), interfaces (`-i`), masquerade connections (`-M`), multicast memberships (`-g`), and statistics (`-s`).

```
tux@mercury:~> netstat -r
Kernel IP routing table
Destination     Gateway         Genmask         Flags  MSS Window  irtt Iface
192.168.2.0     *               255.255.254.0   U        0 0          0 eth0
link-local      *               255.255.0.0     U        0 0          0 eth0
loopback        *               255.0.0.0       U        0 0          0 lo
default         192.168.2.254   0.0.0.0         UG       0 0          0 eth0
```

```
tux@mercury:~> netstat -i
Kernel Interface table
Iface   MTU Met   RX-OK RX-ERR RX-DRP RX-OVR  TX-OK TX-ERR TX-DRP TX-OVR Flg
eth0   1500   0 1624507 129056      0      0   7055      0      0      0
 BMNRU
lo    16436   0   23728      0      0      0  23728      0      0      0 LRU
```

When displaying network connections or statistics, you can specify the socket type to display: TCP (`-t`), UDP (`-u`), or raw (`-r`). The `-p` option shows the PID and name of the program to which each socket belongs.

The following example lists all TCP connections and the programs using these connections.

```
mercury:~ # netstat -t -p
Active Internet connections (w/o servers)
Proto Recv-Q Send-Q Local Address  Foreign Address       State       PID/Pro
[...]
tcp      0      0 mercury:33513    www.novell.com:www-http ESTABLISHED 6862/
fi
tcp      0    352 mercury:ssh      mercury2.:trc-netpoll     ESTABLISHED
 19422/s
tcp      0      0 localhost:ssh  localhost:17828         ESTABLISHED -
```

In the following, statistics for the TCP protocol are displayed:

```
tux@mercury:~> netstat -s -t
Tcp:
    2427 active connections openings
    2374 passive connection openings
    0 failed connection attempts
    0 connection resets received
    1 connections established
    27476 segments received
    26786 segments send out
    54 segments retransmited
    0 bad segments received.
    6 resets sent
[...]
    TCPAbortOnLinger: 0
    TCPAbortFailed: 0
    TCPMemoryPressures: 0
```

2.5.2 Interactive Network Monitor: iptraf


The `iptraf` utility is a menu based Local Area Network (LAN) monitor. It generates network statistics, including TCP and UDP counts, Ethernet load information, IP checksum errors and others.

ASTUCE

`iptraf` is not installed by default, install it with `zypper in iptraf` as `root`

If you enter the command without any option, it runs in an interactive mode. You can navigate through graphical menus and choose the statistics that you want `iptraf` to report. You can also specify which network interface to examine.

Figure 2.1 *iptraf Running in Interactive Mode*

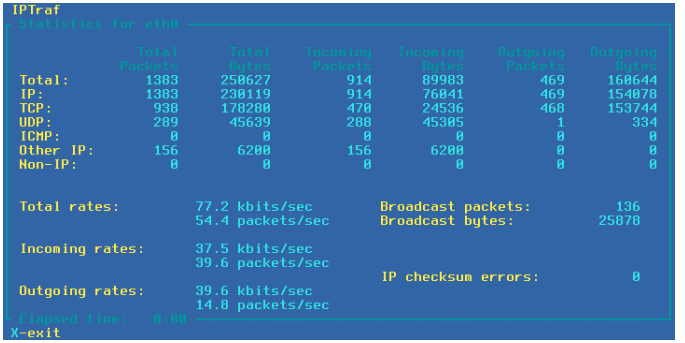

The command `iptraf` understands several options and can be run in a batch mode as well. The following example will collect statistics for network interface eth0 (`-i`) for 1 minute (`-t`). It will be run in the background (`-B`) and the statistics will be written to the `iptraf.log` file in your home directory (`-L`).

```
tux@mercury:~> iptraf -i eth0 -t 1 -B -L ~/iptraf.log
```

You can examine the log file with the `more` command:

```
tux@mercury:~> more ~/iptraf.log
Mon Mar 23 10:08:02 2010; ******** IP traffic monitor started ********
Mon Mar 23 10:08:02 2010; UDP; eth0; 107 bytes; from 192.168.1.192:33157 to
 \
 239.255.255.253:427
Mon Mar 23 10:08:02 2010; VRRP; eth0; 46 bytes; from 192.168.1.252 to \
 224.0.0.18
Mon Mar 23 10:08:03 2010; VRRP; eth0; 46 bytes; from 192.168.1.252 to \
 224.0.0.18
Mon Mar 23 10:08:03 2010; VRRP; eth0; 46 bytes; from 192.168.1.252 to \
 224.0.0.18
[...]
Mon Mar 23 10:08:06 2010; UDP; eth0; 132 bytes; from 192.168.1.54:54395 to \
 10.20.7.255:111
Mon Mar 23 10:08:06 2010; UDP; eth0; 46 bytes; from 192.168.1.92:27258 to \
 10.20.7.255:8765
Mon Mar 23 10:08:06 2010; UDP; eth0; 124 bytes; from 192.168.1.139:43464 to
 \
 10.20.7.255:111
Mon Mar 23 10:08:06 2010; VRRP; eth0; 46 bytes; from 192.168.1.252 to \
 224.0.0.18
--More--(7%)
```

2.6 The /proc File System

The `/proc` file system is a pseudo file system in which the kernel reserves important information in the form of virtual files. For example, display the CPU type with this command:

```
tux@mercury:~> cat /proc/cpuinfo
processor       : 0
vendor_id       : GenuineIntel
cpu family      : 15
model           : 4
model name      : Intel(R) Pentium(R) 4 CPU 3.40GHz
stepping        : 3
cpu MHz         : 2800.000
cache size      : 2048 KB
physical id     : 0
[...]
```

Query the allocation and use of interrupts with the following command:

```
tux@mercury:~> cat /proc/interrupts
           CPU0
  0:    3577519          XT-PIC  timer
  1:        130          XT-PIC  i8042
  2:          0          XT-PIC  cascade
  5:     564535          XT-PIC  Intel 82801DB-ICH4
  7:          1          XT-PIC  parport0
  8:          2          XT-PIC  rtc
  9:          1          XT-PIC  acpi, uhci_hcd:usb1, ehci_hcd:usb4
 10:          0          XT-PIC  uhci_hcd:usb3
 11:      71772          XT-PIC  uhci_hcd:usb2, eth0
 12:     101150          XT-PIC  i8042
 14:      33146          XT-PIC  ide0
 15:     149202          XT-PIC  ide1
NMI:          0
LOC:          0
ERR:          0
MIS:          0
```

Some of the important files and their contents are:

`/proc/devices`
: Available devices

`/proc/modules`
: Kernel modules loaded

`/proc/cmdline`
: Kernel command line

`/proc/meminfo`
: Detailed information about memory usage

`/proc/config.gz`
: `gzip`-compressed configuration file of the kernel currently running

Further information is available in the text file `/usr/src/linux/Documentation/filesystems/proc.txt` (this file is available when the package `kernel-source` is installed). Find information about processes currently running in the `/proc/`*`NNN`* directories, where *`NNN`* is the process ID (PID) of the relevant process. Every process can find its own characteristics in `/proc/self/`:

```
tux@mercury:~> ls -l /proc/self
lrwxrwxrwx 1 root root 64 2007-07-16 13:03 /proc/self -> 5356
tux@mercury:~> ls -l /proc/self/
total 0
dr-xr-xr-x 2 tux users 0 2007-07-16 17:04 attr
-r-------- 1 tux users 0 2007-07-16 17:04 auxv
-r--r--r-- 1 tux users 0 2007-07-16 17:04 cmdline
lrwxrwxrwx 1 tux users 0 2007-07-16 17:04 cwd -> /home/tux
-r-------- 1 tux users 0 2007-07-16 17:04 environ
lrwxrwxrwx 1 tux users 0 2007-07-16 17:04 exe -> /bin/ls
dr-x------ 2 tux users 0 2007-07-16 17:04 fd
-rw-r--r-- 1 tux users 0 2007-07-16 17:04 loginuid
-r--r--r-- 1 tux users 0 2007-07-16 17:04 maps
-rw------- 1 tux users 0 2007-07-16 17:04 mem
-r--r--r-- 1 tux users 0 2007-07-16 17:04 mounts
-rw-r--r-- 1 tux users 0 2007-07-16 17:04 oom_adj
-r--r--r-- 1 tux users 0 2007-07-16 17:04 oom_score
lrwxrwxrwx 1 tux users 0 2007-07-16 17:04 root -> /
-rw------- 1 tux users 0 2007-07-16 17:04 seccomp
-r--r--r-- 1 tux users 0 2007-07-16 17:04 smaps
-r--r--r-- 1 tux users 0 2007-07-16 17:04 stat
[...]
dr-xr-xr-x 3 tux users 0 2007-07-16 17:04 task
-r--r--r-- 1 tux users 0 2007-07-16 17:04 wchan
```

The address assignment of executables and libraries is contained in the `maps` file:

```
tux@mercury:~> cat /proc/self/maps
08048000-0804c000 r-xp 00000000 03:03 17753      /bin/cat
0804c000-0804d000 rw-p 00004000 03:03 17753      /bin/cat
0804d000-0806e000 rw-p 0804d000 00:00 0          [heap]
b7d27000-b7d5a000 r--p 00000000 03:03 11867      /usr/lib/locale/en_GB.utf8/
b7d5a000-b7e32000 r--p 00000000 03:03 11868      /usr/lib/locale/en_GB.utf8/
b7e32000-b7e33000 rw-p b7e32000 00:00 0
b7e33000-b7f45000 r-xp 00000000 03:03 8837       /lib/libc-2.3.6.so
b7f45000-b7f46000 r--p 00112000 03:03 8837       /lib/libc-2.3.6.so
b7f46000-b7f48000 rw-p 00113000 03:03 8837       /lib/libc-2.3.6.so
b7f48000-b7f4c000 rw-p b7f48000 00:00 0
```

```
b7f52000-b7f53000 r--p 00000000 03:03 11842      /usr/lib/locale/en_GB.utf8/
[...]
b7f5b000-b7f61000 r--s 00000000 03:03 9109       /usr/lib/gconv/gconv-module
b7f61000-b7f62000 r--p 00000000 03:03 9720       /usr/lib/locale/en_GB.utf8/
b7f62000-b7f76000 r-xp 00000000 03:03 8828       /lib/ld-2.3.6.so
b7f76000-b7f78000 rw-p 00013000 03:03 8828       /lib/ld-2.3.6.so
bfd61000-bfd76000 rw-p bfd61000 00:00 0          [stack]
ffffe000-fffff000 ---p 00000000 00:00 0          [vdso]
```

2.6.1 procinfo

Important information from the `/proc` file system is summarized by the command `procinfo`:

```
tux@mercury:~> procinfo
Linux 2.6.32.7-0.2-default (geeko@buildhost) (gcc 4.3.4) #1 2CPU

Memory:      Total        Used        Free      Shared     Buffers
Mem:       2060604     2011264       49340           0      200664
Swap:      2104472         112     2104360

Bootup: Wed Feb 17 03:39:33 2010    Load average: 0.86 1.10 1.11 3/118 21547

user  :       2:43:13.78   0.8%  page in :   71099181  disk 1:  2827023r 968
nice  :   1d 22:21:27.87  14.7%  page out:  690734737
system:      13:39:57.57   4.3%  page act:  138388345
IOwait:      18:02:18.59   5.7%  page dea:   29639529
hw irq:       0:03:39.44   0.0%  page flt: 9539791626
sw irq:       1:15:35.25   0.4%  swap in :         69
idle  :   9d 16:07:56.79  73.8%  swap out:        209
uptime:   6d 13:07:11.14         context :  542720687

irq  0: 141399308 timer          irq 14:   5074312 ide0
irq  1:     73784 i8042          irq 50:   1938076 uhci_hcd:usb1, ehci_
irq  4:         2                irq 58:         0 uhci_hcd:usb2
irq  6:         5 floppy [2]     irq 66:    872711 uhci_hcd:usb3, HDA I
irq  7:         2                irq 74:        15 uhci_hcd:usb4
irq  8:         0 rtc            irq 82: 178717720 0         PCI-MSI  e
irq  9:         0 acpi           irq169:  44352794 nvidia
irq 12:         3                irq233:   8209068 0         PCI-MSI  l
```

To see all the information, use the parameter `-a`. The parameter `-nN` produces updates of the information every *N* seconds. In this case, terminate the program by pressing q.

By default, the cumulative values are displayed. The parameter `-d` produces the differential values. `procinfo -dn5` displays the values that have changed in the last five seconds:

2.7 Hardware Information

2.7.1 PCI Resources: lspci

REMARQUE : Accessing PCI configuration.

Most operating systems require root user privileges to grant access to the computer's PCI configuration.

The command `lspci` lists the PCI resources:

```
mercury:~ # lspci
00:00.0 Host bridge: Intel Corporation 82845G/GL[Brookdale-G]/GE/PE \
    DRAM Controller/Host-Hub Interface (rev 01)
00:01.0 PCI bridge: Intel Corporation 82845G/GL[Brookdale-G]/GE/PE \
    Host-to-AGP Bridge (rev 01)
00:1d.0 USB Controller: Intel Corporation 82801DB/DBL/DBM \
    (ICH4/ICH4-L/ICH4-M) USB UHCI Controller #1 (rev 01)
00:1d.1 USB Controller: Intel Corporation 82801DB/DBL/DBM \
    (ICH4/ICH4-L/ICH4-M) USB UHCI Controller #2 (rev 01)
00:1d.2 USB Controller: Intel Corporation 82801DB/DBL/DBM \
    (ICH4/ICH4-L/ICH4-M) USB UHCI Controller #3 (rev 01)
00:1d.7 USB Controller: Intel Corporation 82801DB/DBM \
    (ICH4/ICH4-M) USB2 EHCI Controller (rev 01)
00:1e.0 PCI bridge: Intel Corporation 82801 PCI Bridge (rev 81)
00:1f.0 ISA bridge: Intel Corporation 82801DB/DBL (ICH4/ICH4-L) \
    LPC Interface Bridge (rev 01)
00:1f.1 IDE interface: Intel Corporation 82801DB (ICH4) IDE \
    Controller (rev 01)
00:1f.3 SMBus: Intel Corporation 82801DB/DBL/DBM (ICH4/ICH4-L/ICH4-M) \
    SMBus Controller (rev 01)
00:1f.5 Multimedia audio controller: Intel Corporation 82801DB/DBL/DBM \
    (ICH4/ICH4-L/ICH4-M) AC'97 Audio Controller (rev 01)
01:00.0 VGA compatible controller: Matrox Graphics, Inc. G400/G450 (rev 85)
02:08.0 Ethernet controller: Intel Corporation 82801DB PRO/100 VE (LOM) \
    Ethernet Controller (rev 81)
```

Using `-v` results in a more detailed listing:

```
mercury:~ # lspci -v
[...]
00:03.0 Ethernet controller: Intel Corporation 82540EM Gigabit Ethernet \
Controller (rev 02)
  Subsystem: Intel Corporation PRO/1000 MT Desktop Adapter
  Flags: bus master, 66MHz, medium devsel, latency 64, IRQ 19
  Memory at f0000000 (32-bit, non-prefetchable) [size=128K]
  I/O ports at d010 [size=8]
```

```
  Capabilities: [dc] Power Management version 2
  Capabilities: [e4] PCI-X non-bridge device
  Kernel driver in use: e1000
  Kernel modules: e1000
```

Information about device name resolution is obtained from the file `/usr/share/pci.ids`. PCI IDs not listed in this file are marked « Unknown device. »

The parameter `-vv` produces all the information that could be queried by the program. To view the pure numeric values, use the parameter `-n`.

2.7.2 USB Devices: lsusb

The command `lsusb` lists all USB devices. With the option `-v`, print a more detailed list. The detailed information is read from the directory `/proc/bus/usb/`. The following is the output of `lsusb` with these USB devices attached: hub, memory stick, hard disk and mouse.

```
mercury:/ # lsusb
Bus 004 Device 007: ID 0ea0:2168 Ours Technology, Inc. Transcend JetFlash \
    2.0 / Astone USB Drive
Bus 004 Device 006: ID 04b4:6830 Cypress Semiconductor Corp. USB-2.0 IDE \
    Adapter
Bus 004 Device 005: ID 05e3:0605 Genesys Logic, Inc.
Bus 004 Device 001: ID 0000:0000
Bus 003 Device 001: ID 0000:0000
Bus 002 Device 001: ID 0000:0000
Bus 001 Device 005: ID 046d:c012 Logitech, Inc. Optical Mouse
Bus 001 Device 001: ID 0000:0000
```

2.8 Files and File Systems

2.8.1 Determine the File Type: file

The command `file` determines the type of a file or a list of files by checking `/usr/share/misc/magic`.

```
tux@mercury:~> file /usr/bin/file
/usr/bin/file: ELF 64-bit LSB executable, x86-64, version 1 (SYSV), \
    for GNU/Linux 2.6.4, dynamically linked (uses shared libs), stripped
```

The parameter `-f` *`list`* specifies a file with a list of filenames to examine. The `-z` allows `file` to look inside compressed files:

```
tux@mercury:~> file /usr/share/man/man1/file.1.gz
/usr/share/man/man1/file.1.gz: gzip compressed data, from Unix, max
 compression
tux@mercury:~> file -z /usr/share/man/man1/file.1.gz
/usr/share/man/man1/file.1.gz: troff or preprocessor input text \
    (gzip compressed data, from Unix, max compression)
```

The parameter `-i` outputs a mime type string rather than the traditional description.

```
tux@mercury:~> file -i /usr/share/misc/magic
/usr/share/misc/magic: text/plain charset=utf-8
```

2.8.2 File Systems and Their Usage: mount, df and du

The command `mount` shows which file system (device and type) is mounted at which mount point:

```
tux@mercury:~> mount
/dev/sda2 on / type ext4 (rw,acl,user_xattr)
proc on /proc type proc (rw)
sysfs on /sys type sysfs (rw)
debugfs on /sys/kernel/debug type debugfs (rw)
devtmpfs on /dev type devtmpfs (rw,mode=0755)
tmpfs on /dev/shm type tmpfs (rw,mode=1777)
devpts on /dev/pts type devpts (rw,mode=0620,gid=5)
/dev/sda3 on /home type ext3 (rw)
securityfs on /sys/kernel/security type securityfs (rw)
fusectl on /sys/fs/fuse/connections type fusectl (rw)
gvfs-fuse-daemon on /home/tux/.gvfs type fuse.gvfs-fuse-daemon \
(rw,nosuid,nodev,user=tux)
```

Obtain information about total usage of the file systems with the command `df`. The parameter `-h` (or `--human-readable`) transforms the output into a form understandable for common users.

```
tux@mercury:~> df -h
Filesystem            Size  Used Avail Use% Mounted on
/dev/sda2              20G  5,9G   13G  32% /
devtmpfs              1,6G  236K  1,6G   1% /dev
tmpfs                 1,6G  668K  1,6G   1% /dev/shm
/dev/sda3             208G   40G  159G  20% /home
```

Display the total size of all the files in a given directory and its subdirectories with the command `du`. The parameter `-s` suppresses the output of detailed information and gives only a total for each argument. `-h` again transforms the output into a human-readable form:

```
tux@mercury:~> du -sh /opt
192M    /opt
```

2.8.3 Additional Information about ELF Binaries

Read the content of binaries with the `readelf` utility. This even works with ELF files that were built for other hardware architectures:

```
tux@mercury:~> readelf --file-header /bin/ls
ELF Header:
  Magic:   7f 45 4c 46 02 01 01 00 00 00 00 00 00 00 00 00
  Class:                             ELF64
  Data:                              2's complement, little endian
  Version:                           1 (current)
  OS/ABI:                            UNIX - System V
  ABI Version:                       0
  Type:                              EXEC (Executable file)
  Machine:                           Advanced Micro Devices X86-64
  Version:                           0x1
  Entry point address:               0x402540
  Start of program headers:          64 (bytes into file)
  Start of section headers:          95720 (bytes into file)
  Flags:                             0x0
  Size of this header:               64 (bytes)
  Size of program headers:           56 (bytes)
  Number of program headers:         9
  Size of section headers:           64 (bytes)
  Number of section headers:         32
  Section header string table index: 31
```

2.8.4 File Properties: stat

The command `stat` displays file properties:

```
tux@mercury:~> stat /etc/profile
  File: `/etc/profile'
  Size: 9662       Blocks: 24         IO Block: 4096   regular file
Device: 802h/2050d Inode: 132349      Links: 1
Access: (0644/-rw-r--r--)  Uid: (    0/    root)   Gid: (    0/    root)
Access: 2009-03-20 07:51:17.000000000 +0100
Modify: 2009-01-08 19:21:14.000000000 +0100
Change: 2009-03-18 12:55:31.000000000 +0100
```

The parameter `--file-system` produces details of the properties of the file system in which the specified file is located:

```
tux@mercury:~> stat /etc/profile --file-system
```

```
  File: "/etc/profile"
    ID: d4fb76e70b4d1746 Namelen: 255     Type: ext2/ext3
Block size: 4096       Fundamental block size: 4096
Blocks: Total: 2581445    Free: 1717327    Available: 1586197
Inodes: Total: 655776     Free: 490312
```

2.9 User Information

2.9.1 User Accessing Files: fuser

It can be useful to determine what processes or users are currently accessing certain files. Suppose, for example, you want to unmount a file system mounted at `/mnt`. `umount` returns "device is busy." The command `fuser` can then be used to determine what processes are accessing the device:

```
tux@mercury:~> fuser -v /mnt/*

                     USER        PID ACCESS COMMAND
/mnt/notes.txt       tux    26597 f....  less
```

Following termination of the `less` process, which was running on another terminal, the file system can successfully be unmounted. When used with `-k` option, `fuser` will kill processes accessing the file as well.

2.9.2 Who Is Doing What: w

With the command `w`, find out who is logged onto the system and what each user is doing. For example:

```
tux@mercury:~> w
 14:58:43 up 1 day,  1:21,  2 users,  load average: 0.00, 0.00, 0.00
USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
tux      :0        12:25   ?xdm?   1:23   0.12s /bin/sh /usr/bin/startkde
root     pts/4     14:13    0.00s  0.06s  0.00s w
```

If any users of other systems have logged in remotely, the parameter `-f` shows the computers from which they have established the connection.

2.10 Time and Date

2.10.1 Time Measurement with time

Determine the time spent by commands with the `time` utility. This utility is available in two versions: as a shell built-in and as a program (`/usr/bin/time`).

```
tux@mercury:~> time find . > /dev/null

real    0m4.051s❶
user    0m0.042s❷
sys     0m0.205s❸
```

❶ The real time that elapsed from the command's start-up until it finished.
❷ CPU time of the user as reported by the `times` system call.
❸ CPU time of the system as reported by the `times` system call.

2.11 Graph Your Data: RRDtool

There are a lot of data in the world around you, which can be easily measured in time. For example, changes in the temperature, or the number of data sent or received by your computer's network interface. RRDtool can help you store and visualize such data in detailed and customizable graphs.

RRDtool is available for most UNIX platforms and Linux distributions. openSUSE® ships RRDtool as well. Install it either with YaST or by entering

`zypper install` *`rrdtool`* in the command line as `root`.

ASTUCE

There are Perl, Python, Ruby, or PHP bindings available for RRDtool, so that you can write your own monitoring scripts with your preferred scripting language.

2.11.1 How RRDtool Works

RRDtool is a shortcut of *Round Robin Database tool*. *Round Robin* is a method for manipulating with a constant amount of data. It uses the principle of a circular buffer, where there is no end nor beginning to the data row which is being read. RRDtool uses Round Robin Databases to store and read its data.

As mentioned above, RRDtool is designed to work with data that change in time. The ideal case is a sensor which repeatedly reads measured data (like temperature, speed etc.) in constant periods of time, and then exports them in a given format. Such data are perfectly ready for RRDtool, and it is easy to process them and create the desired output.

Sometimes it is not possible to obtain the data automatically and regularly. Their format needs to be pre-processed before it is supplied to RRDtool, and often you need to manipulate RRDtool even manually.

The following is a simple example of basic RRDtool usage. It illustrates all three important phases of the usual RRDtool workflow: *creating* a database, *updating* measured values, and *viewing* the output.

2.11.2 Simple Real Life Example

Suppose we want to collect and view information about the memory usage in the Linux system as it changes in time. To make the example more vivid, we measure the currently free memory for the period of 40 seconds in 4-second intervals. During the measuring, the three hungry applications that usually consume a lot of system memory have been started and closed: the Firefox Web browser, the Evolution e-mail client, and the Eclipse development framework.

2.11.2.1 Collecting Data

RRDtool is very often used to measure and visualize network traffic. In such case, Simple Network Management Protocol (SNMP) is used. This protocol can query network devices for relevant values of their internal counters. Exactly these values are to be stored with RRDtool. For more information on SNMP, see `http://www.net-snmp.org/`.

Our situation is different - we need to obtain the data manually. A helper script `free_mem.sh` repetitively reads the current state of free memory and writes it to the standard output.

```
tux@mercury:~> cat free_mem.sh
INTERVAL=4
for steps in {1..10}
do
    DATE=`date +%s`
    FREEMEM=`free -b | grep "Mem" | awk '{ print $4 }'`
```

```
    sleep $INTERVAL
    echo "rrdtool update free_mem.rrd $DATE:$FREEMEM"
done
```

Points to Notice

- The time interval is set to 4 seconds, and is implemented with the `sleep` command.
- RRDtool accepts time information in a special format - so called *Unix time*. It is defined as the number of seconds since the midnight of January 1, 1970 (UTC). For example, 1272907114 represents 2010-05-03 17:18:34.
- The free memory information is reported in bytes with `free -b`. Prefer to supply basic units (bytes) instead of multiple units (like kilobytes).
- The line with the `echo ...` command contains the future name of the database file (`free_mem.rrd`), and together creates a command line for the purpose of updating RRDtool values.

After running `free_mem.sh`, you see an output similar to this:

```
tux@mercury:~> sh free_mem.sh
rrdtool update free_mem.rrd 1272974835:1182994432
rrdtool update free_mem.rrd 1272974839:1162817536
rrdtool update free_mem.rrd 1272974843:1096269824
rrdtool update free_mem.rrd 1272974847:1034219520
rrdtool update free_mem.rrd 1272974851:909438976
rrdtool update free_mem.rrd 1272974855:832454656
rrdtool update free_mem.rrd 1272974859:829120512
rrdtool update free_mem.rrd 1272974863:1180377088
rrdtool update free_mem.rrd 1272974867:1179369472
rrdtool update free_mem.rrd 1272974871:1181806592
```

It is convenient to redirect the command's output to a file with

```
sh free_mem.sh > free_mem_updates.log
```

to ease its future execution.

2.11.2.2 Creating Database

Create the initial Robin Round database for our example with the following command:

```
rrdtool create free_mem.rrd --start 1272974834 --step=4 \
DS:memory:GAUGE:600:U:U RRA:AVERAGE:0.5:1:24
```

Points to Notice

- This command creates a file called `free_mem.rrd` for storing our measured values in a Round Robin type database.
- The `--start` option specifies the time (in Unix time) when the first value will be added to the database. In this example, it is one less than the first time value of the `free_mem.sh` output (1272974835).
- The `--step` specifies the time interval in seconds with which the measured data will be supplied to the database.
- The `DS:memory:GAUGE:600:U:U` part introduces a new data source for the database. It is called *memory*, its type is *gauge*, the maximum number between two updates is 600 seconds, and the *minimal* and *maximal* value in the measured range are unknown (U).
- `RRA:AVERAGE:0.5:1:24` creates Round Robin archive (RRA) whose stored data are processed with the *consolidation functions* (CF) that calculates the *average* of data points. 3 arguments of the consolidation function are appended to the end of the line .

If no error message is displayed, then `free_mem.rrd` database is created in the current directory:

```
tux@mercury:~> ls -l free_mem.rrd
-rw-r--r-- 1 tux users 776 May  5 12:50 free_mem.rrd
```

2.11.2.3 Updating Database Values

After the database is created, you need to fill it with the measured data. In Section 2.11.2.1, « Collecting Data » (p. 42), we already prepared the file `free_mem_updates.log` which consists of `rrdtool update` commands. These commands do the update of database values for us.

```
tux@mercury:~> sh free_mem_updates.log; ls -l free_mem.rrd
-rw-r--r--  1 tux users  776 May  5 13:29 free_mem.rrd
```

As you can see, the size of `free_mem.rrd` remained the same even after updating its data.

2.11.2.4 Viewing Measured Values

We have already measured the values, created the database, and stored the measured value in it. Now we can play with the database, and retrieve or view its values.

To retrieve all the values from our database, enter the following on the command line:

```
tux@mercury:~> rrdtool fetch free_mem.rrd AVERAGE --start 1272974830 \
--end 1272974871
          memory
1272974832: nan
1272974836: 1.1729059840e+09
1272974840: 1.1461806080e+09
1272974844: 1.0807572480e+09
1272974848: 1.0030243840e+09
1272974852: 8.9019289600e+08
1272974856: 8.3162112000e+08
1272974860: 9.1693465600e+08
1272974864: 1.1801251840e+09
1272974868: 1.1799787520e+09
1272974872: nan
```

Points to Notice

- `AVERAGE` will fetch average value points from the database, because only one data source is defined (Section 2.11.2.2, « Creating Database » (p. 43)) with `AVERAGE` processing and no other function is available.
- The first line of the output prints the name of the data source as defined in Section 2.11.2.2, « Creating Database » (p. 43).
- The left results column represents individual points in time, while the right one represents corresponding measured average values in scientific notation.
- The `nan` in the last line stands for « not a number ».


Now a graph representing representing the values stored in the database is drawn:

```
tux@mercury:~> rrdtool graph free_mem.png \
--start 1272974830 \
--end 1272974871 \
--step=4 \
DEF:free_memory=free_mem.rrd:memory:AVERAGE \
LINE2:free_memory#FF0000 \
--vertical-label "GB" \
--title "Free System Memory in Time" \
--zoom 1.5 \
--x-grid SECOND:1:SECOND:4:SECOND:10:0:%X
```

Points to Notice

- `free_mem.png` is the file name of the graph to be created.
- `--start` and `--end` limit the time range within which the graph will be drawn.
- `--step` specifies the time resolution (in seconds) of the graph.
- The `DEF:...` part is a data definition called *free_memory*. Its data are read from the `free_mem.rrd` database and its data source called *memory*. The *average* value points are calculated, because no others were defined in Section 2.11.2.2, « Creating Database » (p. 43).
- The `LINE...` part specifies properties of the line to be drawn into the graph. It is 2 pixels wide, its data come from the *free_memory* definition, and its color is red.
- `--vertical-label` sets the label to be printed along the *y* axis, and `--title` sets the main label for the whole graph.
- `--zoom` specifies the zoom factor for the graph. This value must be greater than zero.
- `--x-grid` specifies how to draw grid lines and their labels into the graph. Our example places them every second, while major grid lines are placed every 4 seconds. Labels are placed every 10 seconds under the major grid lines.

Figure 2.2 *Example Graph Created with RRDtool*

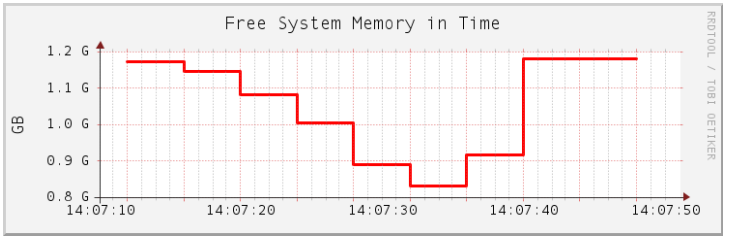

2.11.3 For More Information

RRDtool is a very complex tool with a lot of sub-commands and command line options. Some of them are easy to understand, but you have to really *study* RRDtool to make it produce the results you want and fine-tune them according to your liking.

Apart form RRDtool's man page (`man 1 rrdtool`) which gives you only basic information, you should have a look at the RRDtool homepage [http://oss.oetiker.ch/rrdtool/]. There is a detailed documentation [http://oss.oetiker.ch/rrdtool/doc/index.en.html] of the `rrdtool` command and all its sub-commands. There are also several tutorials [http://oss.oetiker.ch/rrdtool/tut/index.en.html] to help you understand the common RRDtool workflow.

If you are interested in monitoring network traffic, have a look at MRTG [http://oss.oetiker.ch/mrtg/]. It stands for Multi Router Traffic Grapher and can graph the activity of all sorts of network devices. It can easily make use of RRDtool.

3 Monitoring with Nagios

Nagios is a stable, scalable and extensible enterprise-class network and system monitoring tool which allows administrators to monitor network and host resources such as HTTP, SMTP, POP3, disk usage and processor load. Originally Nagios was designed to run under Linux, but it can also be used on several UNIX operating systems. This chapter covers the installation and parts of the configuration of Nagios (`http://www.nagios.org/`).

3.1 Features of Nagios

The most important features of Nagios are:

- Monitoring of network services (SMTP, POP3, HTTP, NNTP, etc.).
- Monitoring of host resources (processor load, disk usage, etc.).
- Simple plug-in design that allows administrators to develop further service checks.
- Support for redundant Nagios servers.

3.2 Installing Nagios

Install Nagios either with `zypper` or using YaST.

For further information on how to install packages see:

- section « Using Zypper » (Chapitre 9, *Managing Software with Command Line Tools*, ↑Start-Up)
- section « Installation et retrait de paquets ou de modèles. » (Chapitre 5, *Installation et Désinstallation de Logiciels*, ↑Start-Up)

Both methods install the packages `nagios` and `nagios-www`. The later RPM package contains a Web interface for Nagios which allows, for example, to view the service status and the problem history. However, this is not absolutely necessary.

Nagios is modular designed and, thus, uses external check plug-ins to verify whether a service is available or not. It is recommended to install the `nagios-plugin` RPM package that contains ready-made check plug-ins. However, it is also possible to write your own, custom check plug-ins.

3.3 Nagios Configuration Files

Nagios organizes the configuration files as follows:

`/etc/nagios/nagios.cfg`
: Main configuration file of Nagios containing a number of directives which define how Nagios operates. See `http://nagios.sourceforge.net/docs/3_0/configmain.html` for a complete documentation.

`/etc/nagios/resource.cfg`
: Containing path to all Nagios plug-ins (default: `/usr/lib/nagios/plugins`).

`/etc/nagios/command.cfg`
: Defining the programs to be used to determine the availability of services or the commands which are used to send e-mail notifications.

`/etc/nagios/cgi.cfg`
: Contains options regarding the Nagios Web interface.

`/etc/nagios/objects/`
: A directory containing object definition files. See Section 3.3.1, « Object Definition Files » (p. 51) for a more complete documentation.

3.3.1 Object Definition Files

In addition to those configuration files Nagios comes with very flexible and highly customizable configuration files called *Object Definition* configuration files. Those configuration files are very important since they define the following objects:

- Hosts
- Services
- Contacts

The flexibility lies in the fact that objects are easily enhanceable. Imagine you are responsible for a host with only one service running. However, you want to install another service on the same host machine and you want to monitor that service as well. It is possible to add another service object and assign it to the host object without huge efforts.

Right after the installation, Nagios offers default templates for object definition configuration files. They can be found at `/etc/nagios/objects`. In the following see a description on how hosts, services and contacts are added:

Exemple 3.1 *A Host Object Definition*

```
define host {
 name                    SRV1
 host_name               SRV1
 address                 192.168.0.1
 use                     generic-host
 check_period            24x7
 check_interval          5
 retry_interval          1
 max_check_attempts      10
 notification_period     workhours
 notification_interval   120
 notification_options    d,u,r
}
```

The `host_name` option defines a name to identify the host that has to be monitored. `address` is the IP address of this host. The `use` statement tells Nagios to inherit other configuration values from the generic-host template. `check_period` defines whether the machine has to be monitored 24x7. `check_interval` makes Nagios checking the service every 5 minutes and `retry_interval` tells Nagios to schedule host check retries at 1 minute intervals. Nagios tries to execute the checks multiple times when they do not pass. You can define how many attempts

Nagios should do with the max_check_attempts directive. All configuration flags beginning with notification handle how Nagios should behave when a failure of a monitored service occurs. In the host definition above, Nagios notifies the administrators only on working hours. However, this can be adjusted with notification_period. According to notification_interval notifications will be resend every two hours. notification_options contains four different flags: d, u, r and n. They control in which state Nagios should notify the administrator. d stands for a down state, u for unreachable and r for recoveries. n does not send any notifications anymore.

Exemple 3.2 *A Service Object Definition*

```
define service {
 use                     generic-service
 host_name               SRV1
 service_description     PING
 contact_groups          router-admins
 check_command           check_ping!100.0,20%!500.0,60%
}
```

The first configuration directive use tells Nagios to inherit from the generic-service template. host_name is the name that assigns the service to the host object. The host itself is defined in the host object definition. A description can be set with service_description. In the example above the description is just PING. Within the contact_groups option it is possible to refer to a group of people who will be contacted on a failure of the service. This group and its members are later defined in a contact group object definition. check_command sets the program that checks whether the service is available, or not.

Exemple 3.3 *A Contact and Contactgroup Definition*

```
define contact {
 contact_name            admins
 use                     generic-contact
 alias                   Nagios Admin
 email                   nagios@localhost
}

define contactgroup {
 contactgroup_name       router-admins
 alias                   Administrators
 members                 admins
}
```

The example listing above shows the direct contact definition and its proper contactgroup. The contact definition contains the e-mail address and the

name of the person who is contacted on a failure of a service. Usually this is the responsible administrator. `use` inherits configuration values from the generic-contact definition.

An overview of all Nagios objects and further information about them can be found at: http://nagios.sourceforge.net/docs/3_0/objectdefinitions.html.

3.4 Configuring Nagios

Learn step-by-step how to configure Nagios to monitor different things like remote services or remote host-resources.

3.4.1 Monitoring Remote Services with Nagios

This section explains how to monitor remote services with Nagios. Proceed as follows to monitor a remote service:

Procédure 3.1 *Monitoring a Remote HTTP Service with Nagios*

1. Create a directory inside `/etc/nagios/objects` using `mkdir`. You can use any desired name for it.

2. Open `/etc/nagios/nagios.conf` and set `cfg_dir` (configuration directory) to the directory you have created in the first step.

3. Change to the configuration directory created in the first step and create the following files: `hosts.cfg`, `services.cfg` and `contacts.cfg`

4. Insert a host object in `hosts.cfg`:

```
define host {
 name                    host.name.com
 host_name               host.name.com
 address                 192.168.0.1
 use                     generic-host
 check_period            24x7
 check_interval          5
 retry_interval          1
```

```
 max_check_attempts     10
 contact_groups         admins
 notification_interval  60
 notification_options   d,u,r
}
```

5 Insert a service object in `services.cfg`:

```
define service {
 use                    generic-service
 host_name              host.name.com
 service_description    HTTP
 contact_groups         router-admins
 check_command          check_http
}
```

6 Insert a contact and contactgroup object in `contacts.cfg`:

```
define contact {
 contact_name           max-mustermann
 use                    generic-contact
 alias                  Webserver Administrator
 email                  mmustermann@localhost
}

define contactgroup {
 contactgroup_name      admins
 alias                  Administrators
 members                max-mustermann
}
```

7 Execute `rcnagios restart` to (re)start Nagios.

8 Execute `cat /var/log/nagios/nagios.log` and verify whether the following content appears:

```
[1242115343] Nagios 3.0.6 starting... (PID=10915)
[1242115343] Local time is Tue May 12 10:02:23 CEST 2009
[1242115343] LOG VERSION: 2.0
[1242115343] Finished daemonizing... (New PID=10916)
```

If you need to monitor a different remote service, it is possible to adjust `check_command` in step Étape 5 (p. 54). A full list of all available check programs can be obtained by executing `ls /usr/lib/nagios/plugins/check_*`

See Section 3.5, « Troubleshooting » (p. 56) if an error occurred.

3.4.2 Monitoring Remote Host-Resources with Nagios

This section explains how to monitor remote host resources with Nagios.

Proceed as follows on the Nagios server:

Procédure 3.2 *Monitoring a Remote Host Resource with Nagios (Server)*

1 Install `nagios-nsca` (for example, `zypper in nagios-nsca`).

2 Set the following options in `/etc/nagios/nagios.cfg`:

```
check_external_commands=1
 accept_passive_service_checks=1
 accept_passive_host_checks=1
 command_file=/var/spool/nagios/nagios.cmd
```

3 Set the `command_file` option in `/etc/nagios/nsca.conf` to the same file defined in `/etc/nagios/nagios.conf`.

4 Add another host and service object:

```
define host {
 name                           foobar
 host_name                      foobar
 address                        10.10.4.234
 use                            generic-host
 check_period                   24x7
 check_interval                 0
 retry_interval                 1
 max_check_attempts             1
 active_checks_enabled          0
 passive_checks_enabled         1
 contact_groups                 router-admins
 notification_interval          60
 notification_options           d,u,r
}

define service {
 use                            generic-service
 host_name                      foobar
 service_description            diskcheck
 active_checks_enabled          0
 passive_checks_enabled         1
 contact_groups                 router-admins
 check_command                  check_ping
}
```

5 Execute `rcnagios restart` and `rcnsca restart`.

Proceed as follows on the client you want to monitor:

Procédure 3.3 *Monitoring a Remote Host Resource with Nagios (client)*

1 Install `nagios-nsca-client` on the host you want to monitor.

2 Write your test scripts (for example a script that checks the disk usage) like this:

```
#!/bin/bash

NAGIOS_SERVER=10.10.4.166
THIS_HOST=foobar

#
# Write own test algorithm here
#

# Execute On SUCCESS:
echo "$THIS_HOST;diskcheck;0;OK: test ok" \
         | send_nsca -H $NAGIOS_SERVER -p 5667 -c /etc/nagios/
send_nsca.cfg -d ";"

# Execute On Warning:
echo "$THIS_HOST;diskcheck;1;Warning: test warning"  \
         | send_nsca -H $NAGIOS_SERVER -p 5667 -c /etc/nagios/
send_nsca.cfg -d ";"

# Execute On FAILURE:
echo "$THIS_HOST;diskcheck;2;CRITICAL: test critical"  \
         | send_nsca -H $NAGIOS_SERVER -p 5667 -c /etc/nagios/
send_nsca.cfg -d ";"
```

3 Insert a new cron entry with `crontab -e`. A typical cron entry could look like this:

```
*/5 * * * * /directory/to/check/program/check_diskusage
```

3.5 Troubleshooting

`Error: ABC 'XYZ' specified in ... '...' is not defined anywhere!`

Make sure that you have defined all necessary objects correctly. Be careful with the spelling.

`(Return code of 127 is out of bounds - plugin may be missing)`
: Make sure that you have installed `nagios-plugins`.

E-mail notification does not work
: Make sure that you have installed and configured a mail server like `postfix` or `exim` correctly. You can verify if your mail server works with `echo "Mail Server Test!" | mail foo@bar.com` which sends an e-mail to foo@bar.com. If this e-mail arrives, your mail server is working correctly. Otherwise, check the log files of the mail server.

3.6 For More Information

The complete Nagios documentation
: http://nagios.sourceforge.net/docs/3_0/toc.html

Object Configuration Overview
: http://nagios.sourceforge.net/docs/3_0/configobject.html

Object Definitions
: http://nagios.sourceforge.net/docs/3_0/objectdefinitions.html

Nagios Plugins
: http://nagios.sourceforge.net/docs/3_0/plugins.html

4 Analyzing and Managing System Log Files

System log file analysis is one of the most important tasks when analyzing the system. In fact, looking at the system log files should be the first thing to do when maintaining or troubleshooting a system. openSUSE automatically logs almost everything that happens on the system in detail. Normally, system log files are written in plain text and therefore, can be easily read using an editor or pager. They are also parsable by scripts, allowing you to easily filter their content.

4.1 System Log Files in /var/log/

System log files are always located under the `/var/log` directory. The following list presents an overview of all system log files from openSUSE present after a default installation. Depending on your installation scope, `/var/log` also contains log files from other services and applications not listed here. Some files and directories described below are « placeholders » and are only used, when the corresponding application is installed. Most log files are only visible for the user `root`.

`acpid`
: Log of the advanced configuration and power interface event daemon (`acpid`), a daemon to notify user-space programs of ACPI events. `acpid` will log all of its activities, as well as the `STDOUT` and `STDERR` of any actions to syslog.

`apparmor`
: AppArmor log files. See Partie « Confining Privileges with AppArmor » (↑Security Guide) for details of AppArmor.

`audit`
: Logs from the audit framework.

`boot.msg`
: Log of the system init process—this file contains all boot messages from the Kernel, the boot scripts and the services started during the boot sequence.

  Check this file to find out whether your hardware has been correctly initialized or all services have been started successfully.

`boot.omsg`
: Log of the system shutdown process - this file contains all messages issued on the last shutdown or reboot.

`ConsoleKit/*`
: Logs of the `ConsoleKit` daemon (daemon for tracking what users are logged in and how they interact with the computer).

`cups/`
: Access and error logs of the Common UNIX Printing System (`cups`).

`faillog`
: Database file that contains all login failures. Use the `faillog` command to view. See `man 8 faillog` for more information.

`firewall`
: Firewall logs.

`gdm/*`
: Log files from the GNOME display manager.

`krb5`
: Log files from the Kerberos network authentication system.

`lastlog`
: The lastlog file is a database which contains info on the last login of each user. Use the command `lastlog` to view. See `man 8 lastlog` for more information.

`localmessages`
: Log messages of some boot scripts, for example the log of the DHCP client.

`mail*`
: Mail server (`postfix`, `sendmail`) logs.

`messages`
: This is the default place where all Kernel and system log messages go and should be the first place (along with `/var/log/warn`) to look at in case of problems.

`NetworkManager`
: NetworkManager log files

`news/*`
: Log messages from a news server.

`ntp`
: Logs from the Network Time Protocol daemon (`ntpd`).

`pk_backend_zypp`
: PackageKit (with `libzypp` backend) log files.

`puppet/*`
: Log files from the data center automation tool puppet.

`samba/*`
: Log files from samba, the Windows SMB/CIFS file server.

`SaX.log`
: Logs from SaX2, the SUSE advanced X11 configuration tool.

`scpm`
: Logs from the system configuration profile management (`scpm`).

`warn`
: Log of all system warnings and errors. This should be the first place (along with `/var/log/messages`) to look at in case of problems.

`wtmp`
: Database of all login/logout activities, runlevel changes and remote connections. Use the command `last` to view. See `man 1 last` for more information.

`xinetd.log`
: Log files from the extended Internet services daemon (`xinetd`).

`Xorg.0.log`
: X startup log file. Refer to this in case you have problems starting X. Copies from previous X starts are numbered Xorg.*?*.log.

`YaST2/*`
: All YaST log files.

`zypp/*`
: `libzypp` log files. Refer to these files for the package installation history.

`zypper.log`
: Logs from the command line installer `zypper`.

4.2 Viewing and Parsing Log Files

To view log files, you can use your favorite text editor. There is also a simple YaST module for viewing `/var/log/messages`, available in the YaST Control Center under *Miscellaneous* > *System Log*.

For viewing log files in a text console, use the commands `less` or `more`. Use `head` and `tail` to view the beginning or end of a log file. To view entries appended to a log file in real-time use `tail -f`. For information about how to use these tools, see their man pages.

To search for strings or regular expressions in log files use `grep`. `awk` is useful for parsing and rewriting log files.

4.3 Managing Log Files with logrotate

Log files under `/var/log` grow on a daily basis and quickly become very big. `logrotate` is a tool for large amounts of log files and helps you to manage these files and to control their growth. It allows automatic rotation, removal, compression, and mailing of log files. Log files can be handled periodically (daily, weekly, or monthly) or when exceeding a particular size.

`logrotate` is usually run as a daily cron job. It does not modify any log files more than once a day unless the log is to be modified because of its size, because `logrotate` is being run multiple times a day, or the `--force` option is used.

The main configuration file of `logrotate` is `/etc/logrotate.conf`. System packages as well as programs that produce log files (for example, `apache2`) put their

own configuration files in the /etc/logrotate.d/ directory. The content of /etc/logrotate.d/ is included via /etc/logrotate.conf.

Exemple 4.1 *Example for /etc/logrotate.conf*

```
# see "man logrotate" for details
# rotate log files weekly
weekly

# keep 4 weeks worth of backlogs
rotate 4

# create new (empty) log files after rotating old ones
create

# use date as a suffix of the rotated file
dateext

# uncomment this if you want your log files compressed
#compress

# comment these to switch compression to use gzip or another
# compression scheme
compresscmd /usr/bin/bzip2
uncompresscmd /usr/bin/bunzip2

# RPM packages drop log rotation information into this directory
include /etc/logrotate.d
```

IMPORTANT

The create option pays heed to the modes and ownerships of files specified in /etc/permissions*. If you modify these settings, make sure no conflicts arise.

logrotate is controlled through cron and is called daily by /etc/cron.daily/logrotate. Use /var/lib/logrotate.status to find out when a particular file has been rotated lastly.

4.4 Monitoring Log Files with logwatch

logwatch is a customizable, pluggable log-monitoring script. It parses system logs, extracts the important information and presents them in a human readable manner. To use logwatch, install the logwatch package.

`logwatch` can either be used at the command-line to generate on-the-fly reports, or via cron to regularly create custom reports. Reports can either be printed on the screen, saved to a file, or be mailed to a specified address. The latter is especially useful when automatically generating reports via cron.

The command-line syntax is easy. You basically tell `logwatch` for which service, time span and to which detail level to generate a report:

```
# Detailed report on all kernel messages from yesterday
logwatch --service kernel --detail High --range Yesterday --print

# Low detail report on all sshd events recorded (incl. archived logs)
logwatch --service sshd --detail Low --range All --archives --print

# Mail a report on all smartd messages from May 5th to May 7th to root@localhost
logwatch --service smartd --range 'between 5/5/2005 and 5/7/2005' \
--mailto root@localhost --print
```

The `--range` option has got a complex syntax—see `logwatch --range help` for details. A list of all services that can be queried is available with the following command:

```
ls /usr/share/logwatch/default.conf/services/ | sed 's/\.conf//g'
```

`logwatch` can be customized to great detail. However, the default configuration should be sufficient in most cases. The default configuration files are located under `/usr/share/logwatch/default.conf/`. Never change them because they would get overwritten again with the next update. Rather place custom configuration in `/etc/logwatch/conf/` (you may use the default configuration file as a template, though). A detailed HOWTO on customizing `logwatch` is available at `/usr/share/doc/packages/logwatch/HOWTO-Customize-LogWatch`. The following config files exist:

`logwatch.conf`
: The main configuration file. The default version is extensively commented. Each configuration option can be overwritten on the command line.

`ignore.conf`
: Filter for all lines that should globally be ignored by `logwatch`.

`services/*.conf`
: The service directory holds configuration files for each service you can generate a report for.

`logfiles/*.conf`
: Specifications on which log files should be parsed for each service.

4.5 Using logger to Make System Log Entries

`logger` is a tool for making entries in the system log. It provides a shell command interface to the syslog(3) system log module. For example, the following line outputs its message in `/var/log/messages`:

```
logger –t Test "This messages comes from $USER"
```

Depending on the current user and hostname, `/var/log/messages` contains a line similar to this:

```
Sep 28 13:09:31 venus Test: This messages comes from tux
```

Partie III. Kernel Monitoring

5 SystemTap—Filtering and Analyzing System Data

SystemTap provides a command line interface and a scripting language to examine the activities of a running Linux system, particularly the kernel, in fine detail. SystemTap scripts are written in the SystemTap scripting language, are then compiled to C-code kernel modules and inserted into the kernel. The scripts can be designed to extract, filter and summarize data, thus allowing the diagnosis of complex performance problems or functional problems. SystemTap provides information similar to the output of tools like `netstat`, `ps`, `top`, and `iostat`. However, more filtering and analysis options can be used for the collected information.

5.1 Conceptual Overview

Each time you run a SystemTap script, a SystemTap session is started. A number of passes are done on the script before it is allowed to run, at which point the script is compiled into a kernel module and loaded. In case the script has already been executed before and no changes regarding any components have occurred (for example, regarding compiler version, kernel version, library path, script contents), SystemTap does not compile the script again, but uses the `*.c` and `*.ko` data stored in the SystemTap cache (`~/.systemtap`). The module is unloaded when the tap has finished running. For an example, see the test run in Section 5.2, « Installation and Setup » (p. 72) and the respective explanation.

5.1.1 SystemTap Scripts

SystemTap usage is based on SystemTap scripts (`*.stp`). They tell SystemTap which type of information to collect, and what to do once that information is collected. The scripts are written in the SystemTap scripting language that is similar to AWK and C. For the language definition, see http://sourceware.org/systemtap/langref/.

The essential idea behind a SystemTap script is to name `events`, and to give them `handlers`. When SystemTap runs the script, it monitors for certain events. When an event occurs, the Linux kernel runs the handler as a sub-routine, then resumes. Thus, events serve as the triggers for handlers to run. Handlers can record specified data and print it in a certain manner.

The SystemTap language only uses a few data types (integers, strings, and associative arrays of these), and full control structures (blocks, conditionals, loops, functions). It has a lightweight punctuation (semicolons are optional) and does not need detailed declarations (types are inferred and checked automatically).

For more information about SystemTap scripts and their syntax, refer to Section 5.3, « Script Syntax » (p. 74) and to the `stapprobes` and `stapfuncs` man pages, that are available with the `systemtap-docs` package.

5.1.2 Tapsets

Tapsets are a library of pre-written probes and functions that can be used in SystemTap scripts. When a user runs a SystemTap script, SystemTap checks the script's probe events and handlers against the tapset library. SystemTap then loads the corresponding probes and functions before translating the script to C. Like SystemTap scripts themselves, tapsets use the filename extension `*.stp`.

However, unlike SystemTap scripts, tapsets are not meant for direct execution—they constitute the library from which other scripts can pull definitions. Thus, the tapset library is an abstraction layer designed to make it easier for users to define events and functions. Tapsets provide useful aliases for functions that users may want to specify as an event (knowing the proper alias is mostly easier than remembering specific kernel functions that might vary between kernel versions).

5.1.3 Commands and Privileges

The main commands associated with SystemTap are `stap` and `staprun`. To execute them, you either need `root` privileges or must be a member of the `stapdev` or `stapusr` group.

`stap`
: SystemTap front-end. Runs a SystemTap script (either from file, or from standard input). It translates the script into C code, compiles it, and loads the resulting kernel module into a running Linux kernel. Then, the requested system trace or probe functions are performed.

`staprun`
: SystemTap back-end. Loads and unloads kernel modules produced by the SystemTap front-end.

For a list of options for each command, use `--help`. For details, refer to the `stap` and the `staprun` man pages.

To avoid giving `root` access to users just for running SystemTap, you can make use of the following SystemTap groups. They are not available by default on openSUSE, but you can create the groups and modify the access rights accordingly.

`stapdev`
: Members of this group can run SystemTap scripts with `stap`, or run SystemTap instrumentation modules with `staprun`. As running `stap` involves compiling scripts into kernel modules and loading them into the kernel, members of this group still have effective `root` access.

`stapusr`
: Members of this group are only allowed to run SystemTap instrumentation modules with `staprun`. In addition, they can only run those modules from `/lib/modules/`*`kernel_version`*`/systemtap/`. This directory must be owned by `root` and must only be writable for the `root` user.

5.1.4 Important Files and Directories

The following list gives an overview of the SystemTap main files and directories.

`/lib/modules/`*`kernel_version`*`/systemtap/`
: Holds the SystemTap instrumentation modules.

`/usr/share/systemtap/tapset/`
Holds the standard library of tapsets.

`/usr/share/doc/packages/systemtap/examples`
Holds a number of example SystemTap scripts for various purposes. Only available if the `systemtap-docs` package is installed.

`~/.systemtap/cache`
Data directory for cached SystemTap files.

`/tmp/stap*`
Temporary directory for SystemTap files, including translated C code and kernel object.

5.2 Installation and Setup

As SystemTap needs information about the kernel, some kernel-related packages must be installed in addition to the SystemTap packages. For each kernel you want to probe with SystemTap, you need to install a set of the following packages that exactly matches the kernel version and flavor (indicated by `*` in the overview below).

IMPORTANT : Repository for Packages with Debugging Information

If you subscribed your system for online updates, you can find « debuginfo » packages in the `*-Debuginfo-Updates` online installation repository relevant for openSUSE 12.3. Use YaST to enable the repository.

For the classic SystemTap setup, install the following packages (using either YaST or `zypper`).

- `systemtap`
- `systemtap-server`
- `systemtap-docs` (optional)
- `kernel-*-base`
- `kernel-*-debuginfo`

- `kernel-*-devel`
- `kernel-source-*`
- `gcc`

To get access to the man pages and to a helpful collection of example SystemTap scripts for various purposes, additionally install the `systemtap-docs` package.

To check if all packages are correctly installed on the machine and if SystemTap is ready to use, execute the following command as `root`.

```
stap -v -e 'probe vfs.read {printf("read performed\n"); exit()}'
```

It probes the currently used kernel by running a script and returning an output. If the output is similar to the following, SystemTap is successfully deployed and ready to use:

```
Pass ❶: parsed user script and 59 library script(s) in 80usr/0sys/214real ms.
Pass ❷: analyzed script: 1 probe(s), 11 function(s), 2 embed(s), 1 global(s)
 in
 140usr/20sys/412real ms.
Pass ❸: translated to C into
 "/tmp/stapDwEk76/stap_1856e21ea1c246da85ad8c66b4338349_4970.c" in
 160usr/0sys/408real ms.
Pass ❹: compiled C into "stap_1856e21ea1c246da85ad8c66b4338349_4970.ko" in
 2030usr/360sys/10182real ms.
Pass ❺: starting run.
 read performed
Pass ❺ (p. 73): run completed in 10usr/20sys/257real ms.
```

❶ Checks the script against the existing tapset library in `/usr/share/systemtap/tapset/` for any tapsets used. Tapsets are scripts that form a library of pre-written probes and functions that can be used in SystemTap scripts.

❷ Examines the script for its components.

❸ Translates the script to C. Runs the system C compiler to create a kernel module from it. Both the resulting C code (`*.c`) and the kernel module (`*.ko`) are stored in the SystemTap cache, `~/.systemtap`.

❹ Loads the module and enables all the probes (events and handlers) in the script by hooking into the kernel. The event being probed is a Virtual File System (VFS) read. As the event occurs on any processor, a valid handler is executed (prints the text `read performed`) and closed with no errors.

❺ After the SystemTap session is terminated, the probes are disabled, and the kernel module is unloaded.

In case any error messages appear during the test, check the output for hints about any missing packages and make sure they are installed correctly. Rebooting and loading the appropriate kernel may also be needed.

5.3 Script Syntax

SystemTap scripts consist of the following two components:

SystemTap Events (Probe Points) (p. 75)
: Name the kernel events at the associated handler should be executed. Examples for events are entering or exiting a certain function, a timer expiring, or starting or terminating a session.

SystemTap Handlers (Probe Body) (p. 76)
: Series of script language statements that specify the work to be done whenever a certain event occurs. This normally includes extracting data from the event context, storing them into internal variables, or printing results.

An event and its corresponding handler is collectively called a `probe`. SystemTap events are also called `probe points`. A probe's handler is also referred to as `probe body`.

Comments can be inserted anywhere in the SystemTap script in various styles: using either `#`, `/* */`, or `//` as marker.

5.3.1 Probe Format

A SystemTap script can have multiple probes. They must be written in the following format:

```
probe event {statements}
```

Each probe has a corresponding statement block. This statement block must be enclosed in `{ }` and contains the statements to be executed per event.

Exemple 5.1 *Simple SystemTap Script*

The following example shows a simple SystemTap script.

```
probe❶ begin❷
```

```
{❸
   printf❹ ("hello world\n")❺
   exit ()❻
}❼
```

❶ Start of the probe.
❷ Event `begin` (the start of the SystemTap session).
❸ Start of the handler definition, indicated by `{`.
❹ First function defined in the handler: the `printf` function.
❺ String to be printed by the `printf` function, followed by a line break (`/n`).
❻ Second function defined in the handler: the `exit()` function. Note that the SystemTap script will continue to run until the `exit()` function executes. If you want to stop the execution of the script before, stop it manually by pressing Ctrl + C.
❼ End of the handler definition, indicated by `}`.

The event `begin` ❷ (the start of the SystemTap session) triggers the handler enclosed in `{ }`, in this case the `printf` function ❹ which prints `hello world` followed by a new line ❺, then exits.

If your statement block holds several statements, SystemTap executes these statements in sequence—you do not need to insert special separators or terminators between multiple statements. A statement block can also be nested within another statement blocks. Generally, statement blocks in SystemTap scripts use the same syntax and semantics as in the C programming language.

5.3.2 SystemTap Events (Probe Points)

SystemTap supports a number of built-in events.

The general event syntax is a dotted-symbol sequence. This allows a breakdown of the event namespace into parts. Each component identifier may be parametrized by a string or number literal, with a syntax like a function call. A component may include a `*` character, to expand to other matching probe points. A probe point may be followed by a `?` character, to indicate that it is optional, and that no error should result if it fails to expand. Alternately, a probe point may be followed by a `!` character to indicate that it is both optional and sufficient.

SystemTap supports multiple events per probe—they need to be separated by a comma (`,`). If multiple events are specified in a single probe, SystemTap will execute the handler when any of the specified events occur.

In general, events can be classified into the following categories:

- Synchronous events: Occur when any process executes an instruction at a particular location in kernel code. This gives other events a reference point (instruction address) from which more contextual data may be available.

  An example for a synchronous event is `vfs.`*`file_operation`*: The entry to the *`file_operation`* event for Virtual File System (VFS). For example, in Section 5.2, « Installation and Setup » (p. 72), `read` is the *`file_operation`* event used for VFS.

- Asynchronous events: Not tied to a particular instruction or location in code. This family of probe points consists mainly of counters, timers, and similar constructs.

  Examples for asynchronous events are: `begin` (start of a SystemTap session—as soon as a SystemTap script is run, `end` (end of a SystemTap session), or timer events. Timer events specify a handler to be executed periodically, like `example timer.s(`*`seconds`*`)`, or `timer.ms(`*`milliseconds`*`)`.

  When used in conjunction with other probes that collect information, timer events allow you to print out periodic updates and see how that information changes over time.

Exemple 5.2 *Probe with Timer Event*

For example, the following probe would print the text « hello world » every 4 seconds:

```
probe timer.s(4)
{
   printf("hello world\n")
}
```

For detailed information about supported events, refer to the `stapprobes` man page. The *See Also* section of the man page also contains links to other man pages that discuss supported events for specific subsystems and components.

5.3.3 SystemTap Handlers (Probe Body)

Each SystemTap event is accompanied by a corresponding handler defined for that event, consisting of a statement block.

5.3.3.1 Functions

If you need the same set of statements in multiple probes, you can place them in a function for easy reuse. Functions are defined by the keyword `function` followed by a name. They take any number of string or numeric arguments (by value) and may return a single string or number.

```
function function_name(arguments) {statements}
probe event {function_name(arguments)}
```

The statements in *`function_name`* are executed when the probe for *`event`* executes. The *`arguments`* are optional values passed into the function.

Functions can be defined anywhere in the script. They may take any

One of the functions needed very often was already introduced in Exemple 5.1, « Simple SystemTap Script » (p. 74): the `printf` function for printing data in a formatted way. When using the `printf` function, you can specify how arguments should be printed by using a format string. The format string is included in quotation marks and can contain further format specifiers, introduced by a `%` character.

Which format strings to use depends on your list of arguments. Format strings can have multiple format specifiers—each matching a corresponding argument. Multiple arguments can be separated by a comma.

Exemple 5.3 *printf Function with Format Specifiers*

```
printf ("❶%s❷(%d❸) open\n❹", execname(), pid())
```

❶ Start of the format string, indicated by `"`.
❷ String format specifier.
❸ Integer format specifier.
❹ End of the format string, indicated by `"`.

The example above would print the current executable name (`execname()`) as string and the process ID (`pid()`) as integer in brackets, followed by a space, then the word `open` and a line break:

```
[...]
vmware-guestd(2206) open
hald(2360) open
[...]
```

Apart from the two functions `execname()` and `pid()` used in Exemple 5.3, « `printf` Function with Format Specifiers » (p. 77), a variety of other functions can be used as `printf` arguments.

Among the most commonly used SystemTap functions are the following:

tid()
: ID of the current thread.

pid()
: Process ID of the current thread.

uid()
: ID of the current user.

cpu()
: Current CPU number.

execname()
: Name of the current process.

gettimeofday_s()
: Number of seconds since UNIX epoch (January 1, 1970).

ctime()
: Convert time into a string.

pp()
: String describing the probe point currently being handled.

thread_indent()
: Useful function for organizing print results. It (internally) stores an indentation counter for each thread (`tid()`). The function takes one argument, an indentation delta, indicating how many spaces to add or remove from the thread's indentation counter. It returns a string with some generic trace data along with an appropriate number of indentation spaces. The generic data returned includes a timestamp (number of microseconds since the initial indentation for the thread), a process name, and the thread ID itself. This allows you to identify what functions were called, who called them, and how long they took.

  Call entries and exits often do not immediately precede each other (otherwise it would be easy to match them). In between a first call entry and its exit, usually

a number of other call entries and exits are made. The indentation counter helps you match an entry with its corresponding exit as it indents the next function call in case it is *not* the exit of the previous one. For an example SystemTap script using `thread_indent()` and the respective output, refer to the *SystemTap Tutorial*: http://sourceware.org/systemtap/tutorial/Tracing.html#fig:socket-trace.

For more information about supported SystemTap functions, refer to the `stap-funcs` man page.

5.3.3.2 Other Basic Constructs

Apart from functions, you can use several other common constructs in SystemTap handlers, including variables, conditional statements (like `if/else`, `while` loops, `for` loops, arrays or command line arguments.

Variables

Variables may be defined anywhere in the script. To define one, simply choose a name and assign a value from a function or expression to it:

```
foo = gettimeofday( )
```

Then you can use the variable in an expression. From the type of values assigned to the variable, SystemTap automatically infers the type of each identifier (string or number). Any inconsistencies will be reported as errors. In the example above, `foo` would automatically be classified as a number and could be printed via `printf()` with the integer format specifier (`%d`).

However, by default, variables are local to the probe they are used in: They are initialized, used and disposed of at each handler evocation. To share variables between probes, declare them global anywhere in the script. To do so, use the `global` keyword outside of the probes:

Exemple 5.4 *Using Global Variables*

```
global count_jiffies, count_ms
probe timer.jiffies(100) { count_jiffies ++ }
probe timer.ms(100) { count_ms ++ }
probe timer.ms(12345)
{
  hz=(1000*count_jiffies) / count_ms
  printf ("jiffies:ms ratio %d:%d => CONFIG_HZ=%d\n",
    count_jiffies, count_ms, hz)
```

```
exit ()
}
```

This example script computes the CONFIG_HZ setting of the kernel by using timers that count jiffies and milliseconds, then computing accordingly. (A jiffy is the duration of one tick of the system timer interrupt. It is not an absolute time interval unit, since its duration depends on the clock interrupt frequency of the particular hardware platform). With the `global` statement it is possible to use the variables `count_jiffies` and `count_ms` also in the probe `timer.ms(12345)`. With `++` the value of a variable is incremented by `1`.

Conditional Statements

There are a number of conditional statements that you can use in SystemTap scripts. The following are probably most common:

If/Else Statements

They are expressed in the following format:

```
if (condition)❶statement1❷
else❸statement2❹
```

The `if` statement compares an integer-valued expression to zero. If the condition expression ❶ is non-zero, the first statement ❷ is executed. If the condition expression is zero, the second statement ❹ is executed. The else clause (❸ and ❹) is optional. Both ❷ and ❹ can also be statement blocks.

While Loops

They are expressed in the following format:

```
while (condition)❶statement❷
```

As long as `condition` is non-zero, the statement ❷ is executed. ❷ can also be a statement block. It must change a value so `condition` will eventually be zero.

For Loops

They are basically a shortcut for `while` loops and are expressed in the following format:

```
for (initialization❶; conditional❷; increment❸) statement
```

The expression specified in ❶ is used to initialize a counter for the number of loop iterations and is executed before execution of the loop starts. The execution of the loop continues until the loop condition ❷ is false. (This expression is checked at the beginning of each loop iteration). The expression specified in ❸

is used to increment the loop counter. It is executed at the end of each loop iteration.

Conditional Operators
The following operators can be used in conditional statements:

==: Is equal to

!=: Is not equal to

>=: Is greater than or equal to

<=: Is less than or equal to

5.4 Example Script

If you have installed the `systemtap-docs` package, you can find a number of useful SystemTap example scripts in `/usr/share/doc/packages/systemtap/examples`.

This section describes a rather simple example script in more detail: `/usr/share/doc/packages/systemtap/examples/network/tcp_connections.stp`.

Exemple 5.5 *Monitoring Incoming TCP Connections with tcp_connections.stp*

```
#! /usr/bin/env stap

probe begin {
  printf("%6s %16s %6s %6s %16s\n",
         "UID", "CMD", "PID", "PORT", "IP_SOURCE")
}

probe kernel.function("tcp_accept").return?,
      kernel.function("inet_csk_accept").return? {
  sock = $return
  if (sock != 0)
    printf("%6d %16s %6d %6d %16s\n", uid(), execname(), pid(),
           inet_get_local_port(sock), inet_get_ip_source(sock))
}
```

This SystemTap script monitors the incoming TCP connections and helps to identify unauthorized or unwanted network access requests in real time. It shows the following information for each new incoming TCP connection accepted by the computer:

- User ID (`UID`)
- Command accepting the connection (`CMD`)
- Process ID of the command (`PID`)
- Port used by the connection (`PORT`)
- IP address from which the TCP connection originated (`IP_SOUCE`)

To run the script, execute

```
stap /usr/share/doc/packages/systemtap/examples/network/tcp_connections.stp
```

and follow the output on the screen. To manually stop the script, press Ctrl + C.

5.5 For More Information

This chapter only provides a short SystemTap overview. Refer to the following links for more information about SystemTap:

`http://sourceware.org/systemtap/`
: SystemTap project home page.

`http://sourceware.org/systemtap/wiki/`
: Huge collection of useful information about SystemTap, ranging from detailed user and developer documentation to reviews and comparisons with other tools, or Frequently Asked Questions and tips. Also contains collections of SystemTap scripts, examples and usage stories and lists recent talks and papers about SystemTap.

`http://sourceware.org/systemtap/documentation.html`
: Features a *SystemTap Tutorial*, a *SystemTap Beginner's Guide*, a *Tapset Developer's Guide*, and a *SystemTap Language Reference* in PDF and HTML format. Also lists the relevant man pages.

You can also find the SystemTap language reference and SystemTap tutorial in your installed system under `/usr/share/doc/packages/systemtap`. Example SystemTap scripts are available from the `example` subdirectory.

6

Kernel Probes

Kernel probes are a set of tools to collect Linux kernel debugging and performance information. Developers and system administrators usually use them either to debug the kernel, or to find system performance bottlenecks. The reported data can then be used to tune the system for better performance.

You can insert these probes into any kernel routine, and specify a handler to be invoked after a particular break-point is hit. The main advantage of kernel probes is that you no longer need to rebuild the kernel and reboot the system after you make changes in a probe.

To use kernel probes, you typically need to write or obtain a specific kernel module. Such module includes both the *init* and the *exit* function. The init function (such as `register_kprobe()`) registers one or more probes, while the exit function unregisters them. The registration function defines *where* the probe will be inserted and *which handler* will be called after the probe is hit. To register or unregister a group of probes at one time, you can use relevant `register_<probe_type>probes()` or `unregister_<probe_type>probes()` functions.

Debugging and status messages are typically reported with the `printk` kernel routine. `printk` is a kernel-space equivalent of a user-space `printf` routine. For more information on `printk`, see Logging kernel messages [http://www.win.tue.nl/~aeb/linux/lk/lk-2.html#ss2.8]. Normally, you can view these messages by inspecting `/var/log/messages` or `/var/log/syslog`. For more information on log files, see Chapitre 4, *Analyzing and Managing System Log Files* (p. 59).

6.1 Supported Architectures

Kernel probes are *fully* implemented on the following architectures:

- i386
- x86_64 (AMD-64, EM64T)
- ppc64
- arm
- ppc

Kernel probes are *partially* implemented on the following architectures:

- ia64 (does not support probes on instruction `slot1`)
- sparc64 (return probes not yet implemented)

6.2 Types of Kernel Probes

There are three types of kernel probes: *kprobes*, *jprobes*, and *kretprobes*. Kretprobes are sometimes referred to as *return probes*. You can find vivid source code examples of all three type of kernel probes in the `/usr/src/linux/samples/kprobes/` directory (package `kernel-source`).

6.2.1 Kprobe

Kprobe can be attached to any instruction in the Linux kernel. When it is registered, it inserts a break-point at the first bytes of the probed instruction. When the processor hits this break-point, the processor registers are saved, and the processing passes to kprobes. First, a *pre-handler* is executed, then the probed instruction is stepped, and, finally a *post-handler* is executed. The control is then passed to the instruction following the probe point.

6.2.2 Jprobe

Jprobe is implemented through the kprobe mechanism. It is inserted on a function's entry point and allows direct access to the arguments of the function which is being probed. Its handler routine must have the same argument list and return value as the probed function. It also has to end by calling the `jprobe_return()` function.

When jprobe is hit, the processor registers are saved, and the instruction pointer is directed to the jprobe handler routine. The control then passes to the handler with the same register contents as the function being probed. Finally, the handler calls the `jprobe_return()` function, and switches the control back to the control function.

In general, you can insert multiple probes on one function. Jprobe is, however, limited to only one instance per function.

6.2.3 Return Probe

Return probes are also implemented through kprobes. When the `register_kretprobe()` function is called, a kprobe is attached to the entry of the probed function. After hitting the probe, the Kernel probes mechanism saves the probed function return address and calls a user-defined return handler. The control is then passed back to the probed function.

Before you call `register_kretprobe()`, you need to set a `maxactive` argument, which specifies how many instances of the function can be probed at the same time. If set too low, you will miss a certain number of probes.

6.3 Kernel probes API

Kprobe's programming interface consists of functions, which are used to register and unregister all used kernel probes, and associated probe handlers. For a more detailed description of these functions and their arguments, see the information sources in Section 6.5, « For More Information » (p. 87).

`register_kprobe()`
: Inserts a break-point on a specified address. When the break-point is hit, the `pre_handler` and `post_handler` are called.

`register_jprobe()`
: Inserts a break-point in the specified address. The address has to be the address of the first instruction of the probed function. When the break-point is hit, the specified handler is run. The handler should have the same argument list and return type as the probed.

`register_kretprobe()`
: Inserts a return probe for the specified function. When the probed function returns, a specified handler is run. This function returns 0 on success, or a negative error number on failure.

`unregister_kprobe()`, `unregister_jprobe()`, `unregister_kretprobe()`
: Removes the specified probe. You can use it any time after the probe has been registered.

`register_kprobes()`, `register_jprobes()`, `register_kretprobes()`
: Inserts each of the probes in the specified array.

`unregister_kprobes()`, `unregister_jprobes()`, `unregister_kretprobes()`
: Removes each of the probes in the specified array.

`disable_kprobe()`, `disable_jprobe()`, `disable_kretprobe()`
: Disables the specified probe temporarily.

`enable_kprobe()`, `enable_jprobe()`, `enable_kretprobe()`
: Enables temporarily disabled probes.

6.4 Debugfs Interface

With recent Linux kernels, the Kernel probes instrumentation uses the kernel debugfs interface. It helps you list all registered probes and globally switch all the probes on or off.

6.4.1 How to List Registered Kernel Probes

The list of all currently registered kprobes is in the `/sys/kernel/debug/kprobes/list` file.

```
saturn.example.com:~ # cat /sys/kernel/debug/kprobes/list
c015d71a  k  vfs_read+0x0   [DISABLED]
c011a316  j  do_fork+0x0
c03dedc5  r  tcp_v4_rcv+0x0
```

The first column lists the address in the kernel where the probe is inserted. The second column prints the type of the probe: `k` for kprobe, `j` for jprobe, and `r` for return probe. The third column specifies the symbol, offset and optional module name of the probe. The following optional columns include the status information of the probe. If the probe is inserted on a virtual address which is not valid anymore, it is marked with `[GONE]`. If the probe is temporarily disabled, it is marked with `[DISABLED]`.

6.4.2 How to Switch All Kernel Probes On or Off

The `/sys/kernel/debug/kprobes/enabled` file represents a switch with which you can globally and forcibly turn on or off all the registered kernel probes. To turn them off, simply enter

```
echo "0" > /sys/kernel/debug/kprobes/enabled
```

on the command line as `root`. To turn them on again, enter

```
echo "1" > /sys/kernel/debug/kprobes/enabled
```

Note that this way you do not change the status of the probes. If a probe is temporarily disabled, it will not be enabled automatically but will remain in the `[DISABLED]` state after entering the latter command.

6.5 For More Information

To learn more about kernel probes, look at the following sources of information:

- Thorough but more technically oriented information about kernel probes is in `/usr/src/linux/Documentation/kprobes.txt` (package `kenrel-source`).
- Examples of all three types of probes (together with related `Makefile`) are in the `/usr/src/linux/samples/kprobes/` directory (package `kenrel-source`).
- In-depth information about Linux kernel modules and `printk` kernel routine is in The Linux Kernel Module Programming Guide [http://tldp.org/LDP/lkmpg/2.6/html/lkmpg.html]
- Practical but slightly outdated information about practical use of kernel probes is in Kernel debugging with Kprobes [http://www.ibm.com/developerworks/library/l-kprobes.html]

Perfmon2—Hardware-Based Performance Monitoring

7

Perfmon2 is a standardized, generic interface to access the performance monitoring unit (PMU) of a processor. It is portable across all PMU models and architectures, supports system-wide and per-thread monitoring, counting and sampling.

7.1 Conceptual Overview

The following subsections give you a brief overview about Perfmon.


7.1.1 Perfmon2 Structure

Performance monitoring is « the action of collecting information related to how an application or system performs ». The information can be obtained from the code or the CPU/chipset.

Modern processors contain a performance monitoring unit (PMU). The design and functionality of a PMU is CPU specific: for example, the number of registers, counters and features supported will vary by CPU implementation.

The Perfmon interface is designed to be generic, flexible and extensible. It can monitor at the program (thread) or system levels. In either mode, it is possible to count or sample your profile information. This uniformity makes it easier to write portable tools. Figure 7.1, « Architecture of perfmon2 » (p. 90) gives an overview.

Figure 7.1 *Architecture of perfmon2*

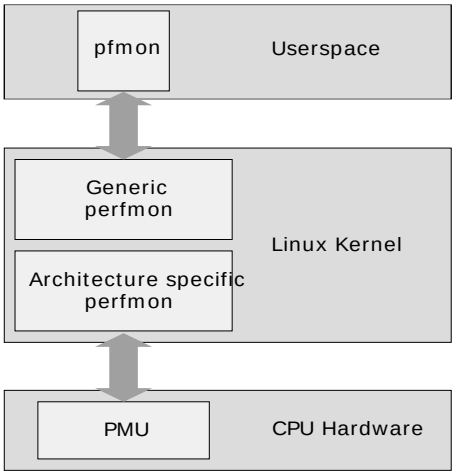

Each PMU model consists of a set of registers: the performance monitor configuration (PMC) and the performance monitor data (PMD). Only PMCs are writeable, but both can be read. These registers store configuration information and data.

7.1.2 Sampling and Counting

Perfmon2 supports two modes where you can run your profiling: sampling or counting.

Sampling is usually expressed by an interval of time (time-based) or an occurance of a definied number of events (event-based). Perfmon indirectly supports time-based sampling by using an event-based sample with constant correlation to time (for example, `unhalted_reference_cycles`.)

In contrast, *Counting* is expressed in terms of a number of occurances of an event.

Both methods store their information into a *sample*. This sample contains information about, for example, where a thread was or instruction pointers.

The following example demonstrates the counting of the `CPU_OP_CYCLES` event and the sampling of this event, generating a sample per 100000 occurances of the event:

```
pfmon --no-cmd-output -e CPU_OP_CYCLES_ALL /bin/ls
```

```
1306604 CPU_OP_CYCLES_ALL
```

The following command gives the count of a specific function and the procentual amount of the total cycles:

```
pfmon --no-cmd-output --short-smpl-periods=100000   -e CPU_OP_CYCLES_ALL /
bin/ls
# results for [28119:28119<-[28102]] (/bin/ls)
# total samples          : 12
# total buffer overflows : 0
#
#                  event00
#     counts   %self    %cum          code addr
          1   8.33%   8.33% 0x2000000000007180
          1   8.33%  16.67% 0x20000000000195a0
          1   8.33%  25.00% 0x2000000000019260
          1   8.33%  33.33% 0x2000000000014e60
          1   8.33%  41.67% 0x20000000001f38c0
          1   8.33%  50.00% 0x20000000001ea481
          1   8.33%  58.33% 0x200000000020b260
          1   8.33%  66.67% 0x2000000000203490
          1   8.33%  75.00% 0x2000000000203360
          1   8.33%  83.33% 0x2000000000203440
          1   8.33%  91.67% 0x4000000000002690
          1   8.33% 100.00% 0x20000000001cfdf1
```

7.2 Installation

In order to use Perfmon2, first check the following preconditions:

SUSE Linux Enterprise 11
: Supported architectures are IA64, x86_64. The package `perf` (Performance Counters for Linux) is the supported tool for x86 and PPC64

SUSE Linux Enterprise 11 SP1
: Supported architecture is IA64 only

The `pfmon` on SUSE Linux Enterprise11 supports the following processors (taken from `/usr/share/doc/packages/pfmon/README`):

Tableau 7.1 *Supported Processors*

Model	Processor
Intel IA-64	Itanium (Merced), Itanium 2 (McKinley, Madison, Deerfield),

Model	Processor
	Itanium 2 9000/9100 (Montecito, Montvale) and Generic
AMD X86	Opteron (K8, fam 10h)
Intel X86	Intel P6 (Pentium II, Pentium Pro, Pentium III, Pentium M); Yonah (Core Duo, Core Solo); Netburst (Pentium 4, Xeon); Core (Merom, Penryn, Dunnington) Core 2 and Quad; Atom; Nehalem; architectural perfmon v1, v2, v3

Install the following packages depending on your architecture:

Tableau 7.2 *Needed Packages*

Architecture	Packages
ia64	`pfmon`

7.3 Using Perfmon

In order to use Perfmon, use the command line tool `pfmon` to get all your information.

REMARQUE : Mutual Exclusion of Perfmon and OProfile Sessions

On x86 architectures it is not possible to start a Perfmon session and a OProfile session. Only one can be run at the same time.

7.3.1 Getting Event Information

To get a list of supported events, use the option `-l` from `pfmon` to list them. Keep in mind, this list depends on the host PMU:

```
pfmon -l
```

```
ALAT_CAPACITY_MISS_ALL
ALAT_CAPACITY_MISS_FP
ALAT_CAPACITY_MISS_INT
BACK_END_BUBBLE_ALL
BACK_END_BUBBLE_FE
BACK_END_BUBBLE_L1D_FPU_RSE
...
CPU_CPL_CHANGES_ALL
CPU_CPL_CHANGES_LVL0
CPU_CPL_CHANGES_LVL1
CPU_CPL_CHANGES_LVL2
CPU_CPL_CHANGES_LVL3
CPU_OP_CYCLES_ALL
CPU_OP_CYCLES_QUAL
CPU_OP_CYCLES_HALTED
DATA_DEBUG_REGISTER_FAULT
DATA_DEBUG_REGISTER_MATCHES
DATA_EAR_ALAT
...
```

Get an explanation of these entries with the option `-i` and the event name:

```
pfmon -i CPU_OP_CYCLES_ALL
Name     : CPU_OP_CYCLES_ALL
Code     : 0x12
Counters : [ 4 5 6 7 8 9 10 11 12 13 14 15 ]
Desc     : CPU Operating Cycles -- All CPU cycles counted
Umask    : 0x0
EAR      : None
ETB      : No
MaxIncr  : 1  (Threshold 0)
Qual     : None
Type     : Causal
Set      : None
```

7.3.2 Enabling System Wide Sessions

Use the `--system-wide` option to enable monitoring all processes that execute on a specific CPU or sets of CPUs. You do not have to be `root` to do so; per default, user level is turned on for all events (option `-u`).

It is possible that one system wide session can run concurrently with another system wide sessions as long as they do not monitor the same set of CPUs. However, you can not run a system wide session with any per-thread sessions together.

The following examples are taken from a Itanium IA64 Montecito processor. To execute a system-wide session, perform the following procedure:

1 Detect your CPU set:

```
pfmon -v --system-wide
...
selected CPUs (2 CPU in set, 2 CPUs online): CPU0 CPU1
```

2 Delimit your session. The following list describes options which are used in the examples below (refer to the man page for more details):

`-e/--events`
: Profile only selected events. See Section 7.3.1, « Getting Event Information » (p. 92) for how to get a list.

`--cpu-list`
: Specifies the list of processors to monitor. Without this options, all available processors are monitored.

`-t/--session-timeout`
: Specifies the duration of the monitor session expressed in seconds.

Use one of the three methods to start your profile session.

- Use the default events:

```
pfmon --cpu-list=0-2 --system-wide -k -e
 CPU_OP_CYCLES_ALL,IA64_INST_RETIRED
<press ENTER to stop session>
CPU0                       7670609 CPU_OP_CYCLES_ALL
CPU0                       4380453 IA64_INST_RETIRED
CPU1                       7061159 CPU_OP_CYCLES_ALL
CPU1                       4143020 IA64_INST_RETIRED
CPU2                       7194110 CPU_OP_CYCLES_ALL
CPU2                       4168239 IA64_INST_RETIRED
```

- Use a timeout expressed in seconds:

```
pfmon --cpu-list=0-2 --system-wide --session-timeout=10 -k -e
 CPU_OP_CYCLES_ALL,IA64_INST_RETIRED
<session to end in 10 seconds>
CPU0                      69263547 CPU_OP_CYCLES_ALL
CPU0                      38682141 IA64_INST_RETIRED
CPU1                      87189093 CPU_OP_CYCLES_ALL
CPU1                      54684852 IA64_INST_RETIRED
CPU2                      64441287 CPU_OP_CYCLES_ALL
CPU2                      37883915 IA64_INST_RETIRED
```

- Execute a command. The session is automatically started when the program starts and automatically stopped when the program is finished:

```
pfmon --cpu-list=0-1 --system-wide -u -e
 CPU_OP_CYCLES_ALL,IA64_INST_RETIRED -- ls -l /dev/null
crw-rw-rw- 1 root root 1, 3 27. Mär 03:30 /dev/null
CPU0                         38925 CPU_OP_CYCLES_ALL
CPU0                          7510 IA64_INST_RETIRED
CPU1                          9825 CPU_OP_CYCLES_ALL
CPU1                          1676 IA64_INST_RETIRED
```

3 Press the Entrée key to stop a session:

4 If you want to aggregate counts, use the `-aggr` option after the previous command:

```
pfmon --cpu-list=0-1 --system-wide -u -e
 CPU_OP_CYCLES_ALL,IA64_INST_RETIRED --aggr
<press ENTER to stop session>

                     52655 CPU_OP_CYCLES_ALL
                     53164 IA64_INST_RETIRED
```

7.3.3 Monitoring Running Tasks

Perfmon can also monitor an existing thread. This is useful for monitoring system daemons or programs which take a long time to start. First determine the process ID you wish to monitor:

```
ps ax | grep foo
10027  pts/1    R     2:23  foo
```

Use the found PID for the `--attach-task` option of `pfmon`:

```
pfmon --attach-task=10027
3682190 CPU_OP_CYCLES_ALL
```

7.4 Retrieving Metrics From DebugFS

Perfmon can collect statistics which are exported through the debug interface. The metrics consists of mostly aggregated counts and durations.

Access the data through mounting the debug file system as `root` under `/sys/kernel/debug`

The data is located under `/sys/kernel/debug/perfmon/` and organized per CPU. Each CPU contains a set of metrics, accessible as ASCII file. The following data is taken from the `/usr/src/linux/Documentation/perfmon2-debugfs.txt`:

Tableau 7.3 *Read-Only Files in /sys/kernel/debug/perfmon/cpu*/*

File	Description
`ctxswin_count`	Number of PMU context switch in
`ctxswin_ns`	Number of nanoseconds spent in the PMU context switch in routine `Average cost of the PMU context switch in = ctxswin_ns / ctxswin_count`
`ctxswout_count`	Number of PMU context switch out
`ctxswout_ns`	Number of nanoseconds spend in the PMU context switch out routine `Average cost of the PMU context switch out = ctxswout_ns / ctxswout_count`
`fmt_handler_calls`	Number of calls to the sampling format routine that handles PMU interrupts (typically the routine that recors a sample)
`fmt_handler_ns`	Number of nanoseconds spent in the routine that handle PMU interrupt in the sampling format `Average time spent in this routine = fmt_handler_ns / fmt_handler_calls`
`handle_timeout_count`	Number of times the `pfm_handle_timeout()` routine

File	Description
	is called (used for timeout-based set switching)
`handle_work_count`	Number of times `pfm_handle_work()` routine is called
`ovl_intr_all_count`	Number of PMU interrupts received by the kernel
`ovfl_intr_nmi_count`	Number of non maskeable interrupts (NMI) received by the kernel from perfmon (only for X86 hardware)
`ovfl_intr_ns`	Number of nanoseconds spent in the perfmon2 PMU interrupt handler routine. `Average time to handle one PMU interrupt = ovfl_intr_ns / ovfl_intr_all_count`
`ovfl_intr_regular_count`	Number of PMU interrupts which are actually processed by the perfmon interrupt handler
`ovfl_intr_replay_count`	Number of PMU interrupts which were replayed on the context switch in or on event set switching
`perfom_intr_spurious_count`, `ovfl_intr_spurious_count`	Number of PMU interrupts which were dropped because there was no active context
`pfm_restart_count`	Number of times `pfm_restart()` is called

File	Description
`reset_pmds_count`	Number of times `pfm_reset_pmds()` is called
`set_switch_count`	Number of event set switches
`set_switch_ns`	Number of nanoseconds spent in the set switching rountine `Average cost of switching sets = set_switch_ns / set_switch_count`

This might be useful to compare your metrics before and after the perfmon run. For example, collect your data first:

```
for i in /sys/kernel/debug/perfmon/cpu0/*; do
   echo "$i:"; cat $i
done >> pfmon-before.txt
```

Run your performance monitoring, maybe restrict it to a specific CPU:

```
pfmon --cpu-list=0 ...
```

Collect your data again:

```
for i in /sys/kernel/debug//perfmon/cpu0/*; do
   echo "$i:"; cat $i
done >> pfmon-after.txt
```

Compare these two files:

```
diff -u pfmon-before.txt pfmon-after.txt
```

7.5 For More Information

This chapter only provides a short overview. Refer to the following links for more information:

`http://perfmon2.sourceforge.net/`
The project home page.

`http://www.iop.org/EJ/article/1742-6596/119/4/042017/jpconf8_119_042017.pdf`
A good overview as PDF.

Chapitre 8, *OProfile—System-Wide Profiler* (p. 101)
Consult this chapter for other performance optimizations.

8 OProfile—System-Wide Profiler

OProfile is a profiler for dynamic program analysis. It investigates the behaviour of a running program and gathers information. This information can be viewed and gives hints for further optimizations.

It is not necessary to recompile or use wrapper libraries in order to use OProfile. Not even a Kernel patch is needed. Usually, when you profile an application, a small overhead is expected, depending on work load and sampling frequency.

8.1 Conceptual Overview

OProfile consists of a Kernel driver and a daemon for collecting data. It makes use of the hardware performance counters provided on Intel, AMD, and other processors. OProfile is capable of profiling all code including the Kernel, Kernel modules, Kernel interrupt handlers, system shared libraries, and other applications.

Modern processors support profiling through the hardware by performance counters. Depending on the processor, there can be many counters and each of these can be programmed with an event to count. Each counter has a value which determines how often a sample is taken. The lower the value, the more often it is used.

During the post-processing step, all information is collected and instruction addresses are mapped to a function name.

8.2 Installation and Requirements

In order to make use of OProfile, install the `oprofile` package. OProfile works on IA-64, AMD64, s390, and PPC64 processors.

It is useful to install the `*-debuginfo` package for the respective application you want to profile. If you want to profile the Kernel, you need the `debuginfo` package as well.

8.3 Available OProfile Utilities

OProfile contains several utilities to handle the profiling process and its profiled data. The following list is a short summary of programms used in this chapter:

`opannotate`
: Outputs annotated source or assembly listings mixed with profile information.

`opcontrol`
: Controls the profiling sessions (start or stop), dumps profile data, and sets up parameters.

`ophelp`
: Lists available events with short descriptions.

`opimport`
: Converts sample database files from a foreign binary format to the native format.

`opreport`
: Generates reports from profiled data.

8.4 Using OProfile

It is possible with OProfile to profile both Kernel and applications. When profiling the Kernel, tell OProfile where to find the `vmlinuz*` file. Use the `--vmlinux` option and point it to `vmlinuz*` (usually in `/boot`). If you need to profile Kernel modules, OProfile does this by default. However, make sure you read `http://oprofile.sourceforge.net/doc/kernel-profiling.html`.

Applications usually do not need to profile the Kernel, so better use the `--no-vmlinux` option to reduce the amount of information.

8.4.1 General Steps

In its simplest form, start the daemon, collect data, stop the daemon, and create your report. This method is described in detail in the following procedure:

1 Open a shell and log in as `root`.

2 Decide if you want to profile with or without the Linux Kernel:

2a **Profile With the Linux Kernel** Execute the following commands, because the `opcontrol` command needs an uncompressed image:

```
cp /boot/vmlinux-`uname -r`.gz /tmp
gunzip /tmp/vmlinux*.gz
opcontrol --vmlinux=/tmp/vmlinux*
```

2b **Profile Without the Linux Kernel** Use the following command:

```
opcontrol --no-vmlinux
```

If you want to see which functions call other functions in the output, use additionally the `--callgraph` option and set a maximum *`DEPTH`*:

```
opcontrol --no-vmlinux --callgraph DEPTH
```

3 Start the OProfile daemon:

```
opcontrol --start
Using 2.6+ OProfile kernel interface.
Using log file /var/lib/oprofile/samples/oprofiled.log
Daemon started.
Profiler running.
```

4 Start your application you want to profile right after the previous step.

5 Stop the OProfile daemon:

```
opcontrol --stop
```

6 Dump the collected data to `/var/lib/oprofile/samples`:

```
opcontrol --dump
```

7 Create a report:

```
opreport
Overflow stats not available
CPU: CPU with timer interrupt, speed 0 MHz (estimated)
Profiling through timer interrupt
          TIMER:0|
  samples|      %|
------------------
    84877 98.3226 no-vmlinux
...
```

8 Shutdown the OProfile daemon:

```
opcontrol --shutdown
```

8.4.2 Getting Event Configurations

The general procedure for event configuration is as follows:

1 Use first the events `CPU-CLK_UNHALTED` and `INST_RETIRED` to find optimization opportunities.

2 Use specific events to find bottlenecks. To list them, use the command `opcontrol --list-events`.

If you need to profile certain events, first check the available events supported by your processor with the `ophelp` command (example output generated from Intel Core i5 CPU):

```
ophelp
oprofile: available events for CPU type "Intel Architectural Perfmon"

See Intel 64 and IA-32 Architectures Software Developer's Manual
Volume 3B (Document 253669) Chapter 18 for architectural perfmon events
This is a limited set of fallback events because oprofile doesn't know your
 CPU
CPU_CLK_UNHALTED: (counter: all))
        Clock cycles when not halted (min count: 6000)
INST_RETIRED: (counter: all))
        number of instructions retired (min count: 6000)
LLC_MISSES: (counter: all))
        Last level cache demand requests from this core that missed the LLC
 (min count: 6000)
        Unit masks (default 0x41)
        ----------
        0x41: No unit mask
LLC_REFS: (counter: all))
        Last level cache demand requests from this core (min count: 6000)
        Unit masks (default 0x4f)
```

```
        ----------
        0x4f: No unit mask
BR_MISS_PRED_RETIRED: (counter: all))
        number of mispredicted branches retired (precise) (min count: 500)
```

You can get the same output from `opcontrol --list-events`.

Specify the performance counter events with the option `--event`. Multiple options are possible. This option needs an event name (from `ophelp`) and a sample rate, for example:

```
opcontrol --event=CPU_CLK_UNHALTED:100000
```


AVERTISSEMENT : Be Careful with Low Sampling Rates with `CPU_CLK_UNHALTED`

Setting sampling rates is dangerous as small rates cause the system to overload and freeze.

8.5 Using OProfile's GUI

The GUI for OProfile can be started as `root` with `oprof_start`, see Figure 8.1, « GUI for OProfile » (p. 105). Select your events and change the counter, if necessary. Every green line is added to the list of checked events. Hover the mouse over the line to see a help text in the status line below. Use the *Configuration* tab to set the buffer and CPU size, the verbose option and others. Click on *Start* to execute OProfile.

Figure 8.1 *GUI for OProfile*

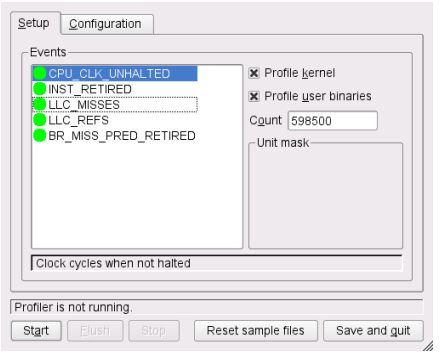

8.6 Generating Reports

Before generating a report, make sure OProfile has dumped your data to the `/var/lib/oprofile/samples` directory using the command `opcontrol --dump`. A report can be generated with the commands `opreport` or `opannotate`.

Calling `oreport` without any options gives a complete summary. With an executable as an argument, retrieve profile data only from this executable. If you analyze applications written in C++, use the `--demangle smart` option.

The `opannotate` generates output with annotations from source code. Run it with the following options:

```
opannotate --source \
   --base-dirs=BASEDIR \
   --search-dirs= \
   --output-dir=annotated/ \
   /lib/libfoo.so
```

The option `--base-dir` contains a comma separated list of paths which is stripped from debug source files. This paths were searched prior than looking in `--search-dirs`. The `--search-dirs` option is also a comma separated list of directories to search for source files.

REMARQUE : Inaccuracies in Annotated Source

Due to compiler optimization, code can disappear and appear in a different place. Use the information in `http://oprofile.sourceforge.net/doc/debug-info.html` to fully understand its implications.

8.7 For More Information

This chapter only provides a short overview. Refer to the following links for more information:

`http://oprofile.sourceforge.net`
: The project home page.

Manpages
: Details descriptions about the options of the different tools.

`/usr/share/doc/packages/oprofile/oprofile.html`
Contains the OProfile manual.

`http://developer.intel.com/`
Architecture reference for Intel processors.

`http://www.amd.com/us-en/assets/content_type/white_papers_and_tech_docs/22007.pdf`
Architecture reference for AMD Athlon/Opteron/Phenom/Turion.

`http://www-01.ibm.com/chips/techlib/techlib.nsf/productfamilies/PowerPC/`
Architecture reference for PowerPC64 processors in IBM iSeries, pSeries, and blade server systems.

Partie IV. Resource Management

9 General System Resource Management

Tuning the system is not only about optimizing the kernel or getting the most out of your application, it begins with setting up a lean and fast system. The way you set up your partitions and file systems can influence the server's speed. The number of active services and the way routine tasks are scheduled also affects performance.

9.1 Planning the Installation

A carefully planned installation ensures that the system is basically set up exactly as you need it for the given purpose. It also saves considerable time when fine tuning the system. All changes suggested in this section can be made in the *Installation Settings* step during the installation. See section « Paramètres d'Installation » (Chapitre 1, *Installation avec YaST*, ↑Reference) for details.

9.1.1 Partitioning

Depending on the server's range of applications and the hardware layout, the partitioning scheme can influence the machine's performance (although to a lesser extend only). It is beyond the scope of this manual to suggest different partition schemes for particular workloads, however, the following rules will positively affect performance. Of course they do not apply when using an external storage system.

- Make sure there always is some free space available on the disk, since a full disk has got inferior performance

- Disperse simultaneous read and write access onto different disks by, for example:
    - using separate disks for the operating system, the data, and the log files
    - placing a mail server's spool directory on a separate disk
    - distributing the user directories of a home server between different disks

9.1.2 Installation Scope

Actually, the installation scope has no direct influence on the machine's performance, but a carefully chosen scope of packages nevertheless has got advantages. It is recommended to install the minimum of packages needed to run the server. A system with a minimum set of packages is easier to maintain and has got less potential security issues. Furthermore, a tailor made installation scope also ensures no unnecessary services are started by default.

openSUSE lets you customize the installation scope on the Installation Summary screen. By default, you can select or remove preconfigured patterns for specific tasks, but it is also possible to start the YaST Software Manager for a fine-grained package based selection.

One or more of the following patterns selected for installation by default may not be needed in all cases:

GNOME Desktop Environment
: A server seldomly needs a full-blown desktop environment. In case a graphical environment is needed, a more economical solution such as as icewm or fvwm may also be sufficient.

X Window System
: When solely administrating the server and its applications via command line, consider to not install this pattern. However, keep in mind that it is needed to run GUI applications from a remote machine. If your application is managed by a GUI or if you prefer the GUI version of YaST, keep this pattern.

Print Server
: This pattern is only needed when you want to print from the machine.

9.1.3 Default Runlevel

A running X Window system eats up many resources and is seldomly needed on a server. It is strongly recommended to start the system in runlevel 3 (Full multi-user with network, no X). You will still be able to start graphical applications from remote or use the `startx` command to start a local graphical desktop.

9.2 Disabling Unnecessary Services

The default installation starts a number of services (the number varies with the installation scope). Since each service consumes resources, it is recommended to disable the ones not needed. Run *YaST > System > System Services (Runlevel) > Expert Mode* to start the services management module. When using the graphical version of YaST you can click on the column headlines to sort the service list. Use this to get an overview of which services are currently running or which services are started in the server's default runlevel. Mark a service with the mouse to see its description. Use the *Start/Stop/Refresh* dropdown to disable the service for the running session. To permanently disable it, use the *Set/Reset* drop-down.

The following list shows services started after a default installation of openSUSE that may not be needed:

alsasound
: Loads the Advanced Linux Sound System. Disable if you do not need sound.

auditd
: A daemon for the audit system. Disable if you do not use Audit.

bluez-coldplug
: Handles cold plugging of Bluetooth dongles. Disable if you do not have Bluetooth.

cups
: A printer daemon. Disable if you do not have access to a printer.

java.binfmt_misc
: Enables the execution of *.class or *.jar Java programs. Disable if you do not run Java applications.

nfs
: Services needed to mount NFS file systems. Disable if not needed.

smbfs
: Services needed to mount SMB/CIFS file systems from a Windows server. Disable if not needed.

splash / splash_early
: Shows the splash screen on start-up. Usually not needed on a server

9.3 File Systems and Disk Access

Hard disks are the slowest components in a computer system and therefore often the cause for a bottleneck. Using the file system that best suits your workload helps to improve performance. Using special mount options or prioritizing a process' I/O priority are further means to speed up the system.

9.3.1 File Systems

openSUSE ships with a number of different file systems, including BrtFS, Ext3, Ext2, ReiserFS, and XFS. Each file system has its own advantages and disadvantages.

9.3.1.1 NFS

NFS (Version 3) tuning is covered in detail in the NFS Howto at `http://nfs.sourceforge.net/nfs-howto/`. The first thing you should experiment with when mounting NFS shares is increasing the read write blocksize to 32768 by using the mount options `wsize` and `rsize`.

9.3.2 Disabling Access Time (atime) Updates

Whenever a file is read on a Linux file system, its access time (atime) is updated. As a result, each read-only file access in fact causes a write. On a journaling file system it is even two write operations since the journal will be updated, too. It is recommended

to turn this feature off when you do not need to keep track of access times. This is possibly true for file and Web servers as well as for a network storage.

To turn off access time updates, mount the file system with the `noatime` option. To do so, either edit `/etc/fstab` directly, or use the *Fstab Options* dialog when editing or adding a partition with the YaST Partitioner.

9.3.3 Prioritizing Disk Access with ionice

The `ionice` command lets you prioritize disk access for single processes. This enables you to give less I/O priority to non time-critical background processes with heavy disk access such as backup jobs. On the other hand `ionice` lets you raise I/O priority for a specific process to make sure this process has always immediate access to the disk. You may set the following three scheduling classes:

Idle
: A process from the idle scheduling class is only granted disk access, when no other process has asked for disk I/O.

Best effort
: By default, every process will be granted I/O priority from this class. Priority within this class can be adjusted to a level from 0 to 7 (with 0 being the highest priority). By default, a process will be granted a priority corresponding to their CPU nice level.

Real-time
: Processes in this class are always granted disk access first. Fine-tune the priority level from 0 to 7 (with 0 being the highest priority). Use with care, since it can starve other processes.

For more details and the exact command syntax refer to the `ionice(1)` man page for ionice.

10 Kernel Control Groups

Kernel Control Groups (abbreviated known as « cgroups ») are a kernel feature that allows aggregating or partitioning tasks (processes) and all their children into hierarchical organized groups. These hierarchical groups can be configured to show a specialized behavior that helps with tuning the system to make best use of available hardware and network resources.

10.1 Technical Overview and Definitions


The following terms are used in this chapter:

- « cgroup » is another name for Control Groups.
- In a cgroup there is a set of tasks (processes) associated with a set of subsystems that act as parameters constituting an environment for the tasks.
- Subsystems provide the parameters that can be assigned and define CPU sets, freezer, or—more general—« resource controllers » for memory, disk I/O, etc.
- cgroups are organized in a tree-structured hierarchy. There can be more than one hierarchy in the system. You use a different or alternate hierarchy to cope with specific situations.
- Every task running in the system is in exactly one of the cgroups in the hierarchy.

10.2 Scenario

See the following resource planning scenario for a better understanding (source: `/usr/src/linux/Documentation/cgroups/cgroups.txt`):

Figure 10.1 *Resource Planning*

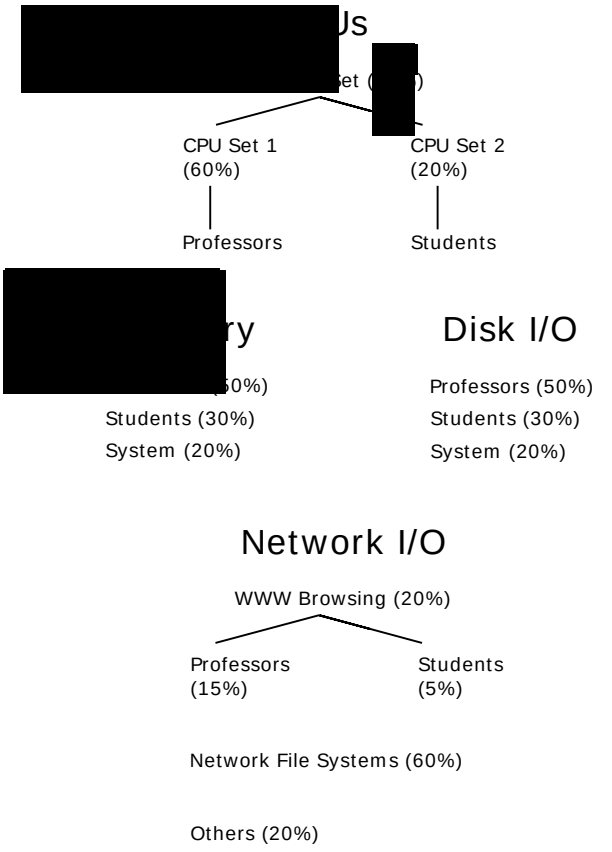

Web browsers such as Firefox will be part of the Web network class, while the NFS daemons such as (k)nfsd will be part of the NFS network class. On the other side,

Firefox will share appropriate CPU and memory classes depending on whether a professor or student started it.

10.3 Control Group Subsystems

The following subsystems are available and can be classified as two types:

Isolation and Special Controllers
: cpuset, freezer, devices, checkpoint/restart

Resource Controllers
: cpu (scheduler), cpuacct, memory, disk I/O, network

Either mount each subsystem separately:

```
mount -t cgroup -o cpu none /cpu
mount -t cgroup -o cpuset none /cpuset
```

or all subsystems in one go; you can use an arbitrary device name (e.g., `none`), which will appear in `/proc/mounts`:

```
mount -t cgroup none /sys/fs/cgroup
```

Some additional information on available subsystems:

Cpuset (Isolation)
: Use cpuset to tie processes to system subsets of CPUs and memory (« memory nodes »). For an example, see Section 10.4.3, « Example: Cpusets » (p. 123).

Freezer (Control)
: The Freezer subsystem is useful for high-performance computing clusters (HPC clusters). Use it to freeze (stop) all tasks in a group or to stop tasks, if they reach a defined checkpoint. For more information, see `/usr/src/linux/Documentation/cgroups/freezer-subsystem.txt`.

  Here are basic commands to use the freezer subsystem:

```
mount -t cgroup -o freezer freezer /freezer
# Create a child cgroup:
mkdir /freezer/0
# Put a task into this cgroup:
```

```
echo $task_pid > /freezer/0/tasks
# Freeze it:
echo FROZEN > /freezer/0/freezer.state
# Unfreeze (thaw) it:
echo THAWED > /freezer/0/freezer.state
```

Checkpoint/Restart (Control)
: Save the state of all processes in a cgroup to a dump file. Restart it later (or just save the state and continue).

  Move a « saved container » between physical machines (as VM can do).

  Dump all process images of a cgroup to a file.

Devices (Isolation)
: A system administrator can provide a list of devices that can be accessed by processes under cgroups.

  It limits access to a device or a file system on a device to only tasks that belong to the specified cgroup. For more information, see `/usr/src/linux/Documentation/cgroups/devices.txt`.

Cpuacct (Control)
: The CPU accounting controller groups tasks using cgroups and accounts the CPU usage of these groups. For more information, see `/usr/src/linux/Documentation/cgroups/cpuacct.txt`.

CPU (Resource Control)
: Share CPU bandwidth between groups with the group scheduling function of CFS (the scheduler). Mechanically complicated.

Memory (Resource Control)

- Limits memory usage of user space processes.
- Control swap usage by setting `swapaccount=1` as a kernel boot parameter.
- Limit LRU (Least Recently Used) pages.
- Anonymous and file cache.
- No limits for kernel memory.

- Maybe in another subsystem if needed.

For more information, see `/usr/src/linux/Documentation/cgroups/memory.txt`.

Blkio (Resource Control)

The blkio (Block IO) controller is now available as a disk I/O controller. With the blkio controller you can currently set policies for proportional bandwidth and for throttling.

These are the basic commands to configure proportional weight division of bandwidth by setting weight values in `blkio.weight`:

```
# Setup in /sys/fs/cgroup
mkdir /sys/fs/cgroup/blkio
mount -t cgroup -o blkio none /sys/fs/cgroup/blkio
# Start two cgroups
mkdir -p /sys/fs/cgroup/blkio/group1 /sys/fs/cgroup/blkio/group2
# Set weights
echo 1000 > /sys/fs/cgroup/blkio/group1/blkio.weight
echo  500 > /sys/fs/cgroup/blkio/group2/blkio.weight
# Write the PIDs of the processes to be controlled to the
# appropriate groups
command1 &
echo $! > /sys/fs/cgroup/blkio/group1/tasks

command2 &
echo $! > /sys/fs/cgroup/blkio/group2/tasks
```

These are the basic commands to configure throttling or upper limit policy by setting values in `blkio.throttle.read_bps_device` for reads and `blkio.throttle.write_bps_device` for writes:

```
# Setup in /sys/fs/cgroup
mkdir /sys/fs/cgroup/blkio
mount -t cgroup -o blkio none /sys/fs/cgroup/blkio
# Bandwidth rate of a device for the root group; format:
# <major>:<minor>  <byes_per_second>
echo "8:16  1048576" > /sys/fs/cgroup/blkio/
blkio.throttle.read_bps_device
```

For more information about caveats, usage scenarios, and additional parameters, see `/usr/src/linux/Documentation/cgroups/blkio-controller.txt`.

Network I/O (Resource Control) (Draft)

Still under discussion.

10.4 Using Controller Groups

10.4.1 Prerequisites

To conveniently use cgroups, install the following additional packages:

- `libcgroup1` — basic user space tools to simplify resource management
- `cpuset` — contains the `cset` to manipulate cpusets
- `libcpuset1` — C API to cpusets
- `kernel-source` — only needed for documentation purposes
- `lxc` — Linux container implementation

10.4.2 Checking the Environment

The kernel shipped with openSUSE supports cgroups. There is no need to apply additional patches. Execute `lxc-checkconfig` to see a cgroups environment similar to the following output:

```
--- Namespaces ---
Namespaces: enabled
Utsname namespace: enabled
Ipc namespace: enabled
Pid namespace: enabled
User namespace: enabled
Network namespace: enabled
Multiple /dev/pts instances: enabled

--- Control groups ---
Cgroup: enabled
Cgroup namespace: enabled
Cgroup device: enabled
Cgroup sched: enabled
Cgroup cpu account: enabled
Cgroup memory controller: enabled
Cgroup cpuset: enabled

--- Misc ---
Veth pair device: enabled
Macvlan: enabled
Vlan: enabled
```

```
File capabilities: enabled
```

To find out which subsystems are available, proceed as follows:

```
mkdir /cgroups
mount -t cgroup none /cgroups
grep cgroup /proc/mounts
```

The following subsystems are available: perf_event, blkio, net_cls, freezer, devices, memory, cpuacct, cpu, cpuset.

10.4.3 Example: Cpusets

With the command line proceed as follows:

1. To determine the number of CPUs and memory nodes see `/proc/cpuinfo` and `/proc/zoneinfo`.

2. Create the cpuset hierarchy as a virtual file system (source: /usr/src/linux/Documentation/cgroups/cpusets.txt):

   ```
   mount -t cgroup -ocpuset cpuset /sys/fs/cgroup/cpuset
   cd /sys/fs/cgroup/cpuset
   mkdir Charlie
   cd Charlie
   # List of CPUs in this cpuset:
   echo 2-3 > cpuset.cpus
   # List of memory nodes in this cpuset:
   echo 1 > cpuset.mems
   echo $$ > tasks
   # The subshell 'sh' is now running in cpuset Charlie
   # The next line should display '/Charlie'
   cat /proc/self/cpuset
   ```

3. Remove the cpuset using shell commands:

   ```
   rmdir /sys/fs/cgroup/cpuset/Charlie
   ```

   This fails as long as this cpuset is in use. First, you must remove the inside cpusets or tasks (processes) that belong to it. Check it with:

   ```
   cat /sys/fs/cgroup/cpuset/Charlie/tasks
   ```

For background information and additional configuration flags, see `/usr/src/linux/Documentation/cgroups/cpusets.txt`.

With the `cset` tool, proceed as follows:

```
# Determine the number of CPUs and memory nodes
cset set --list
# Creating the cpuset hierarchy
cset set --cpu=2-3 --mem=1 --set=Charlie
# Starting processes in a cpuset
cset proc --set Charlie --exec -- stress -c 1 &
# Moving existing processes to a cpuset
cset proc --move --pid PID --toset=Charlie
# List task in a cpuset
cset proc --list --set Charlie
# Removing a cpuset
cset set --destroy Charlie
```

10.4.4 Example: cgroups

Using shell commands, proceed as follows:

1 Create the cgroups hierarchy:

```
mount -t cgroup cgroup /sys/fs/cgroup
cd /sys/fs/cgroup/cpuset/cgroup
mkdir priority
cd priority
cat cpu.shares
```

2 Understanding cpu.shares:

- 1024 is the default (for more information, see `/Documentation/scheduler/sched-design-CFS.txt`) = 50% utilization
- 1524 = 60% utilization
- 2048 = 67% utilization
- 512 = 40% utilization

3 Changing cpu.shares

```
echo 1024 > cpu.shares
```

10.5 For More Information

- Kernel documentation (package `kernel-source`): files in `/usr/src/linux/Documentation/cgroups`:

- `/usr/src/linux/Documentation/cgroups/blkio-controller.txt`
- `/usr/src/linux/Documentation/cgroups/cgroups.txt`
- `/usr/src/linux/Documentation/cgroups/cpuacct.txt`
- `/usr/src/linux/Documentation/cgroups/cpusets.txt`
- `/usr/src/linux/Documentation/cgroups/devices.txt`
- `/usr/src/linux/Documentation/cgroups/freezer-subsystem.txt`
- `/usr/src/linux/Documentation/cgroups/memcg_test.txt`
- `/usr/src/linux/Documentation/cgroups/memory.txt`
- `/usr/src/linux/Documentation/cgroups/resource_counter.txt`

- http://lwn.net/Articles/243795/—Corbet, Jonathan: Controlling memory use in containers (2007).
- http://lwn.net/Articles/236038/—Corbet, Jonathan: Process containers (2007).

11 Power Management

Power management aims at reducing operating costs for energy and cooling systems while at the same time keeping the performance of a system at a level that matches the current requirements. Thus, power management is always a matter of balancing the actual performance needs and power saving options for a system. Power management can be implemented and used at different levels of the system. A set of specifications for power management functions of devices and the operating system interface to them has been defined in the Advanced Configuration and Power Interface (ACPI). As power savings in server environments can primarily be achieved on processor level, this chapter introduces some of the main concepts and highlights some tools for analyzing and influencing relevant parameters.

11.1 Power Management at CPU Level

At CPU level, you can control power usage in various ways: for example, by using idling power states (C-states), changing CPU frequency (P-states), and throttling the CPU (T-states). The following sections give a short introduction to each approach and its significance for power savings. Detailed specifications can be found at http://www.acpi.info/spec.htm.

11.1.1 C-States (Processor Operating States)

Modern processors have several power saving modes called `C-states`. They reflect the capability of an idle processor to turn off unused components in order to save power. Whereas C-states have been available for laptops for some time, they are a rather recent trend in the server market (for example, with Intel* processors, C-modes are only available since Nehalem).

When a processor runs in the `C0` state, it is executing instructions. A processor running in any other C-state is idle. The higher the C number, the deeper the CPU sleep mode: more components are shut down to save power. Deeper sleep states save more power, but the downside is that they have higher latency (the time the CPU needs to go back to `C0`).

Some states also have submodes with different power saving latency levels. Which C-states and submodes are supported depends on the respective processor. However, `C1` is always available.

Tableau 11.1, « C-States » (p. 128) gives an overview of the most common C-states.

Tableau 11.1 *C-States*

Mode	Definition
C0	Operational state. CPU fully turned on.
C1	First idle state. Stops CPU main internal clocks via software. Bus interface unit and APIC are kept running at full speed.
C2	Stops CPU main internal clocks via hardware. State where the processor maintains all software-visible states, but may take longer to wake up through interrupts.

Mode	Definition
C3	Stops all CPU internal clocks. The processor does not need to keep its cache coherent, but maintains other states. Some processors have variations of the C3 state that differ in how long it takes to wake the processor through interrupts.

11.1.2 P-States (Processor Performance States)

While a processor operates (in C0 state), it can be in one of several CPU performance states (`P-states`). Whereas C-states are idle states (all but C0), `P-states` are operational states that relate to CPU frequency and voltage.

The higher the P-state, the lower the frequency and voltage at which the processor runs. The number of P-states is processor-specific and the implementation differs across the various types. However, `P0` is always the highest-performance state. Higher P-state numbers represent slower processor speeds and lower power consumption. For example, a processor in P3 state runs more slowly and uses less power than a processor running at P1 state. To operate at any P-state, the processor must be in the C0 state where the processor is working and not idling. The CPU P-states are also defined in the Advanced Configuration and Power Interface (ACPI) specification, see `http://www.acpi.info/spec.htm`.

C-states and P-states can vary independently of one another.

11.1.3 T-States (Processor Throttling States)

T-states refer to throttling the processor clock to lower frequencies in order to reduce thermal effects. This means that the CPU is forced to be idle a fixed percentage of its cycles per second. Throttling states range from `T1` (the CPU has no forced idle cycles) to `Tn`, with the percentage of idle cycles increasing the greater *n* is.

Note that throttling does not reduce voltage and since the CPU is forced to idle part of the time, processes will take longer to finish and will consume more power instead of saving any power.

T-states are only useful if reducing thermal effects is the primary goal. Since T-states can interfere with C-states (preventing the CPU from reaching higher C-states), they can even increase power consumption in a modern CPU capable of C-states.

11.1.4 Turbo Features

Since quite some time, CPU power consumption and performance tuning is not only about frequency scaling anymore. In modern processors, a combination of different means is used to achieve the optimum balance between performance and power savings: deep sleep states, traditional dynamic frequency scaling and hidden boost frequencies. The turbo features (Turbo CORE* or Turbo Boost*) of the latest AMD* or Intel* processors allow to dynamically increase (boost) the clock speed of active CPU cores while other cores are in deep sleep states. This increases the performance of active threads while still complying to Thermal Design Power (TDP) limits.

However, the conditions under which a CPU core may use turbo frequencies are very architecture-specific. Learn how to evaluate the efficiency of those new features in Section 11.3.1, « Using the `cpupower` Tools » (p. 133).

11.2 The Linux Kernel CPUfreq Infrastructure

Processor performance states (P-states) and processor operating states (C-states) are the capability of a processor to switch between different supported operating frequencies and voltages to modulate power consumption.

In order to dynamically scale processor frequencies at runtime, you can use the CPUfreq infrastructure to set a static or dynamic power policy for the system. Its main components are the CPUfreq subsystem (providing a common interface to the various low-level technologies and high-level policies) , the in-kernel governors (policy governors that can change the CPU frequency based on different criteria) and CPU-specific drivers that implement the technology for the specific processor.

The dynamic scaling of the clock speed helps to consume less power and generate less heat when not operating at full capacity.

11.2.1 In-Kernel Governors

You can think of the in-kernel governors as a sort of pre-configured power schemes for the CPU. The CPUfreq governors use P-states to change frequencies and lower power consumption. The dynamic governors can switch between CPU frequencies, based on CPU utilization to allow for power savings while not sacrificing performance. These governors also allow for some tuning so you can customize and change the frequency scaling behavior.

The following governors are available with the CPUfreq subsystem:

Performance Governor
: The CPU frequency is statically set to the highest possible for maximum performance. Consequently, saving power is not the focus of this governor.

  Tuning options: The range of maximum frequencies available to the governor can be adjusted (for example, with the `cpupower` command line tool).

Powersave Governor
: The CPU frequency is statically set to the lowest possible. This can have severe impact on the performance, as the system will never rise above this frequency no matter how busy the processors are.

  However, using this governor often does not lead to the expected power savings as the highest savings can usually be achieved at idle through entering C-states. Due to running processes at the lowest frequency with the powersave governor, processes will take longer to finish, thus prolonging the time for the system to enter any idle C-states.

  Tuning options: The range of minimum frequencies available to the governor can be adjusted (for example, with the `cpupower` command line tool).

On-demand Governor
: The kernel implementation of a dynamic CPU frequency policy: The governor monitors the processor utilization. As soon as it exceeds a certain threshold, the governor will set the frequency to the highest available. If the utilization is less than the threshold, the next lowest frequency is used. If the system continues

to be underutilized, the frequency is again reduced until the lowest available frequency is set.

For openSUSE, the on-demand governor is the default governor and the one that has the best test coverage.

Tuning options: The range of available frequencies, the rate at which the governor checks utilization, and the utilization threshold can be adjusted. Another parameter you might want to change for the on-demand governor is `ignore_nice_load`. For details, refer to Procédure 11.1, « Ignoring Nice Values in Processor Utilization » (p. 139).

Conservative Governor
: Similar to the on-demand implementation, this governor also dynamically adjusts frequencies based on processor utilization, except that it allows for a more gradual increase in power. If processor utilization exceeds a certain threshold, the governor does not immediately switch to the highest available frequency (as the on-demand governor does), but only to next higher frequency available.

  Tuning options: The range of available frequencies, the rate at which the governor checks utilization, the utilization thresholds, and the frequency step rate can be adjusted.

11.2.2 Related Files and Directories

If the CPUfreq subsystem in enabled on your system (which it is by default with openSUSE), you can find the relevant files and directories under `/sys/devices/system/cpu/`. If you list the contents of this directory, you will find a `cpu{0..x}` subdirectory for each processor, and several other files and directories. A `cpufreq` subdirectory in each processor directory holds a number of files and directories that define the parameters for CPUfreq. Some of them are writable (for `root`), some of them are read-only. If your system currently uses the on-demand or conservative governor, you will see a separate subdirectory for those governors in `cpufreq`, containing the parameters for the governors.

REMARQUE : Different Processor Settings

The settings under the `cpufreq` directory can be different for each processor. If you want to use the same policies across all processors, you need to adjust the parameters for each processor. Instead of looking up

or modifying the current settings manually (in `/sys/devices/system/cpu*/cpufreq`), we advise to use the tools provided by the `cpupower` package for that.

11.3 Viewing, Monitoring and Tuning Power-related Settings

The following command line tools are available for that purpose:

Using the `cpupower` Tools (p. 133)
: The new `cpupower` tool was designed to give an overview of *all* CPU power-related parameters that are supported on a given machine, including turbo (or boost) states. Use the tool set to view and modify settings of the kernel-related CPUfreq and cpuidle systems as well as other settings not related to frequency scaling or idle states. The integrated monitoring framework can access both Kernel-related parameters and hardware statistics and is thus ideally suited for performance benchmarks. It also helps you to identify the dependencies between turbo and idle states.

Monitoring Power Consumption with powerTOP (p. 137)
: powerTOP combines various sources of information (analysis of programs, device drivers, kernel options, amounts and sources of interrupts waking up processors from sleep states) and shows them in one screen. The tool helps you to identify the reasons for unnecessary high power consumption (for example, processes that are mainly responsible for waking up a processor from its idle state) and to optimize your system settings to avoid these.

11.3.1 Using the `cpupower` Tools

After installing the `cpupower` package, view the available `cpupower` subcommands with `cpupower --help`. Access the general man page with `man cpupower`, and the man pages of the subcommands with `man cpupower-`*`subcommand`*.

The subcommands `frequency-info` and `frequency-set` are mostly equivalent to `cpufreq-info` and `cpufreq-set`, respectively. However, they provide extended output and there are small differences in syntax and behavior:

Syntax Differences Between `cpufreq*` and `cpupower`

- To specify the number of the CPU to which the command is applied, both commands have the `-c` option. Due to the command-subcommand structure, the placement of the `-c` option is different for `cpupower`:

  `cpupower -c 4 frequency-info` (versus `cpufreq-info -c 4`)

  `cpupower` lets you also specify a list of CPUs with `-c`. For example, the following command would affect the CPUs `1` , `2`, `3`, and `5`:

  ```
  cpupower -c 1-3,5 frequency-set
  ```

- If `cpufreq*` and `cpupower` are used without the `-c` option, the behavior differs:

  `cpufreq-set` automatically applies the command to CPU `0`, whereas `cpupower frequency-set` applies the command to all CPUs in this case. Typically, `cpupower *info` subcommands access only CPU `0`, whereas `cpufreq-info` accesses all CPUs, if not specified otherwise.

11.3.1.1 Viewing Current Settings with cpupower

Similar to `cpufreq-info`, `cpupower frequency-info` also shows the statistics of the cpufreq driver used in the Kernel. Additionally, it shows if turbo (boost) states are supported and enabled in the BIOS. Run without any options, it shows an output similar to the following:

Exemple 11.1 *Example Output of cpupower frequency-info*

```
analyzing CPU 0:
  driver: acpi-cpufreq
  CPUs which run at the same hardware frequency: 0 1 2 3
  CPUs which need to have their frequency coordinated by software: 0
  maximum transition latency: 10.0 us.
  hardware limits: 2.00 GHz - 2.83 GHz
  available frequency steps: 2.83 GHz, 2.34 GHz, 2.00 GHz
  available cpufreq governors: conservative, userspace, powersave, ondemand, performance
  current policy: frequency should be within 2.00 GHz and 2.83 GHz.
                  The governor "ondemand" may decide which speed to use
                  within this range.
  current CPU frequency is 2.00 GHz (asserted by call to hardware).
  boost state support:
    Supported: yes
    Active: yes
```

To get the current values for all CPUs, use `cpupower -c all frequency-info`.

11.3.1.2 Viewing Kernel Idle Statistics with cpupower

The `idle-info` subcommand shows the statistics of the cpuidle driver used in the Kernel. It works on all architectures that use the cpuidle Kernel framework.

Exemple 11.2 *Example Output of cpupower idle-info*

```
CPUidle driver: acpi_idle
CPUidle governor: menu

Analyzing CPU 0:
Number of idle states: 3
Available idle states: C1 C2
C1:
Flags/Description: ACPI FFH INTEL MWAIT 0x0
Latency: 1
Usage: 3156464
Duration: 233680359
C2:
Flags/Description: ACPI FFH INTEL MWAIT 0x10
Latency: 1
Usage: 273007117
Duration: 103148860538
```

11.3.1.3 Monitoring Kernel and Hardware Statistics with cpupower

The most powerful enhancement is the `monitor` subcommand. Use it to report processor topology, and monitor frequency and idle power state statistics over a certain period of time. The default interval is `1` second, but it can be changed with the `-i`. Independent processor sleep states and frequency counters are implemented in the tool—some retrieved from kernel statistics, others reading out hardware registers. The available monitors depend on the underlying hardware and the system. List them with `cpupower monitor -l`. For a description of the individual monitors, refer to the cpupower-monitor man page.

The `monitor` subcommand allows you to execute performance benchmarks and to compare Kernel statistics with hardware statistics for specific workloads.

Exemple 11.3 *Example cpupower monitor Output*

```
|Mperf               || Idle_Stats
 ❶                      ❷
CPU | C0   | Cx   | Freq || POLL | C1   | C2   | C3
   0|  3.71| 96.29|  2833||  0.00|  0.00|  0.02| 96.32
   1| 100.0| -0.00|  2833||  0.00|  0.00|  0.00|  0.00
   2|  9.06| 90.94|  1983||  0.00|  7.69|  6.98| 76.45
   3|  7.43| 92.57|  2039||  0.00|  2.60| 12.62| 77.52
```

❶ Mperf shows the average frequency of a CPU, including boost frequencies, over a period of time. Additionally, it shows the percentage of time the CPU has been active (`C0`) or in any sleep state (`Cx`). The default sampling rate is `1` second and the values are read directly from the hardware registers. As the turbo states are managed by the BIOS, it is impossible to get the frequency values at a given instant. On modern processors with turbo features the Mperf monitor is the only way to find out about the frequency a certain CPU has been running in.

❷ Idle_Stats shows the statistics of the cpuidle kernel subsystem. The kernel updates these values every time an idle state is entered or left. Therefore there can be some inaccuracy when cores are in an idle state for some time when the measure starts or ends.

Apart from the (general) monitors in the example above, other architecture-specific monitors are available. For detailed information, refer to the `cpupower-monitor` man page.

By comparing the values of the individual monitors, you can find correlations and dependencies and evaluate how well the power saving mechanism works for a certain workload. In Exemple 11.3 (p. 136) you can see that CPU `0` is idle (the value of `Cx` is near to 100%), but runs at a very high frequency. Additionally, the CPUs `0` and `1` have the same frequency values which means that there is a dependency between them.

11.3.1.4 Modifying Current Settings with cpupower

Similar to `cpufreq-set`, you can use `cpupower frequency-set` command as `root` to modify current settings. It allows you to set values for the minimum or maximum CPU frequency the governor may select or to create a new governor. With the `-c` option, you can also specify for which of the processors the settings should be modified. That makes it easy to use a consistent policy across all processors without

adjusting the settings for each processor individually. For more details and the available options, refer to the `cpupower-freqency-set` man page or run `cpupower frequency-set --help`.

11.3.2 Monitoring Power Consumption with powerTOP

Another useful tool for monitoring system power consumption is powerTOP. It helps you to identify the reasons for unnecessary high power consumption (for example, processes that are mainly responsible for waking up a processor from its idle state) and to optimize your system settings to avoid these. It supports both Intel and AMD processors.

powerTOP combines various sources of information (analysis of programs, device drivers, kernel options, amounts and sources of interrupts waking up processors from sleep states) and shows them in one screen. Exemple 11.4, « Example powerTOP Output » (p. 137) shows which information categories are available:

Exemple 11.4 *Example powerTOP Output*

```
Cn                Avg  residency       P-states   (frequencies)
❶                  ❷      ❸              ❹           ❺
C0 (cpu running)         (11.6%)       2.00 Ghz       0.1%
polling          0.0ms   ( 0.0%)       2.00 Ghz       0.0%
C1               4.4ms   (57.3%)       1.87 Ghz       0.0%
C2              10.0ms   (31.1%)       1064 Mhz      99.9%


Wakeups-from-idle per second : 11.2     interval: 5.0s ❻
no ACPI power usage estimate available ❼



Top causes for wakeups: ❽
96.2% (826.0)       <interrupt> : extra timer interrupt
 0.9% (  8.0)     <kernel core> : usb_hcd_poll_rh_status (rh_timer_func)
 0.3% (  2.4)       <interrupt> : megasas
 0.2% (  2.0)     <kernel core> : clocksource_watchdog (clocksource_watchdog)
 0.2% (  1.6)       <interrupt> : eth1-TxRx-0
 0.1% (  1.0)       <interrupt> : eth1-TxRx-4

[...]

Suggestion: ❾ Enable SATA ALPM link power management via:
echo min_power > /sys/class/scsi_host/host0/link_power_management_policy
or press the S key.
```

❶ The column shows the C-states. When working, the CPU is in state `0`, when resting it is in some state greater than `0`, depending on which C-states are available and how deep the CPU is sleeping.
❷ The column shows average time in milliseconds spent in the particular C-state.
❸ The column shows the percentages of time spent in various C-states. For considerable power savings during idle, the CPU should be in deeper C-states most of the time. In addition, the longer the average time spent in these C-states, the more power is saved.
❹ The column shows the frequencies the processor and kernel driver support on your system.
❺ The column shows the amount of time the CPU cores stayed in different frequencies during the measuring period.
❻ Shows how often the CPU is awoken per second (number of interrupts). The lower the number the better. The `interval` value is the powerTOP refresh interval which can be controlled with the `-t` option. The default time to gather data is 5 seconds.
❼ When running powerTOP on a laptop, this line displays the ACPI information on how much power is currently being used and the estimated time until discharge of the battery. On servers, this information is not available.
❽ Shows what is causing the system to be more active than needed. powerTOP displays the top items causing your CPU to awake during the sampling period.
❾ Suggestions on how to improve power usage for this machine.

For more information, refer to the powerTOP project page at `http://www.lesswatts.org/projects/powertop/`. It also provides tips and tricks and an informative FAQ section.

11.4 Special Tuning Options

The following sections highlight some of the most relevant settings that you might want to touch.

11.4.1 Tuning Options for P-States

The CPUfreq subsystem offers several tuning options for P-states: You can switch between the different governors, influence minimum or maximum CPU frequency to be used or change individual governor parameters.

To switch to another governor at runtime, use `cpupower frequency-set` with the `-g` option. For example, running the following command (as `root`) will activate the on-demand governor:

```
cpupower frequency-set -g ondemand
```

If you want the change in governor to persist also after a reboot or shutdown, use the pm-profiler as described in Section 11.5, « Creating and Using Power Management Profiles » (p. 141).

To set values for the minimum or maximum CPU frequency the governor may select, use the `-d` or `-u` option, respectively.

Apart from the governor settings that can be influenced with `cpupower` or `cpufreq*`, you can also tune further governor parameters manually, for example, Ignoring Nice Values in Processor Utilization (p. 139).

Procédure 11.1 *Ignoring Nice Values in Processor Utilization*

One parameter you might want to change for the on-demand or conservative governor is `ignore_nice_load`.

Each process has a niceness value associated with it. This value is used by the kernel to determine which processes require more processor time than others. The higher the nice value, the lower the priority of the process. Or: the « nicer » a process, the less CPU it will try to take from other processes.

If the `ignore_nice_load` parameter for the on-demand or conservative governor is set to `1`, any processes with a `nice` value will not be counted toward the overall processor utilization. When `ignore_nice_load` is set to `0` (default value), all processes are counted toward the utilization. Adjusting this parameter can be useful if you are running something that requires a lot of processor capacity but you do not care about the runtime.

1 Change to the subdirectory of the governor whose settings you want to modify, for example:

```
cd /sys/devices/system/cpu/cpu0/cpufreq/conservative/
```

2 Show the current value of `ignore_nice_load` with:

```
cat ignore_nice_load
```

3 To set the value to `1`, execute:

```
echo 1 > ignore_nice_load
```

ASTUCE : Using the Same Value for All Cores

When setting the `ignore_nice_load` value for `cpu0`, the same value is automatically used for all cores. In this case, you do not need to repeat the steps above for each of the processors where you want to modify this governor parameter.

Another parameter that significantly impacts the performance loss caused by dynamic frequency scaling is the sampling rate (rate at which the governor checks the current CPU load and adjusts the processor's frequency accordingly). Its default value depends on a BIOS value and it should be as low as possible. However, in modern systems, an appropriate sampling rate is set by default and does not need manual intervention.

11.4.2 Tuning Options for C-states

By default, openSUSE uses C-states appropriately. The only parameter you might want to touch for optimization is the `sched_mc_power_savings` scheduler. Instead of distributing a work load across all cores with the effect that all cores are utilized only at a minimum level, the kernel can try to schedule processes on as few cores as possible so that the others can go idle. This helps to save power as it allows some processors to be idle for a longer time so they can reach a higher C-state. However, the actual savings depend on a number of factors, for example how many processors are available and which C-states are supported by them (especially deeper ones such as `C3` to `C6`).

If `sched_mc_power_savings` is set to `0` (default value), no special scheduling is done. If it is set to `1`, the scheduler tries to consolidate the work onto the fewest number of processors possible in the case that all processors are a little busy. To modify this parameter, proceed as follows:

Procédure 11.2 *Scheduling Processes on Cores*

1. Become `root` on a command line.

2. To view the current value of `sched_mc_power_savings`, use the following command:

```
cpupower info -m
```

3 To set `sched_mc_power_savings` to `1`, execute:

```
cpupower set -m 1
```

11.5 Creating and Using Power Management Profiles

openSUSE includes pm-profiler, intended for server use. It is a script infrastructure to enable or disable certain power management functions via configuration files. It allows you to define different profiles, each having a specific configuration file for defining different settings. A configuration template for new profiles can be found at `/usr/share/doc/packages/pm-profiler/config.template`. The template contains a number of parameters you can use for your profile, including comments on usage and links to further documentation. The individual profiles are stored in `/etc/pm-profiler/`. The profile that will be activated on system start, is defined in `/etc/pm-profiler.conf`.

Procédure 11.3 *Creating and Switching Power Profiles*

To create a new profile, proceed as follows:

1 Create a directory in `/etc/pm-profiler/`, containing the profile name, for example:

```
mkdir /etc/pm-profiler/testprofile
```

2 To create the configuration file for the new profile, copy the profile template to the newly created directory:

```
cp /usr/share/doc/packages/pm-profiler/config.template \
     /etc/pm-profiler/testprofile/config
```

3 Edit the settings in `/etc/pm-profiler/testprofile/config` and save the file. You can also remove variables that you do not need—they will be handled like empty variables, the settings will not be touched at all.

4 Edit `/etc/pm-profiler.conf`. The `PM_PROFILER_PROFILE` variable defines which profile will be activated on system start. If it has no value, the default system or kernel settings will be used. To set the newly created profile:

```
PM_PROFILER_PROFILE="testprofile"
```

The profile name you enter here must match the name you used in the path to the profile configuration file (`/etc/pm-profiler/testprofile/config`), not necessarily the `NAME` you used for the profile in the `/etc/pm-profiler/testprofile/config`.

5 To activate the profile, run

```
rcpm-profiler start
```

or

```
/usr/lib/pm-profiler/enable-profile testprofile
```

Though you have to manually create or modify a profile by editing the respective profile configuration file, you can use YaST to switch between different profiles. Start YaST and select *System* > *Power Management* to open the *Power Management Settings*. Alternatively, become `root` and execute `yast2 power-management` on a command line. The drop-down list shows the available profiles. `Default` means that the system default settings will be kept. Select the profile to use and click *Finish*.

11.6 Troubleshooting

BIOS options enabled?

In order to make use of C-states or P-states, check your BIOS options:

- To use C-states, make sure to enable `CPU C State` or similar options to benefit from power savings at idle.
- To use P-states and the CPUfreq governors, make sure to enable `Processor Performance States` options or similar.

In case of a CPU upgrade, make sure to upgrade your BIOS, too. The BIOS needs to know the new CPU and its valid frequencies steps in order to pass this information on to the operating system.

CPUfreq subsystem enabled?

In openSUSE, the CPUfreq subsystem is enabled by default. To find out if the subsystem is currently enabled, check for the following path in your system: `/`

`sys/devices/system/cpu/cpufreq` (or `/sys/devices/system/cpu/cpu*/cpufreq` for machines with multiple cores). If the `cpufreq` subdirectory exists, the subsystem is enabled.

Log file information?
: Check syslog (usually `/var/log/messages`) for any output regrading the CPUfreq subsystem. Only severe errors are reported there.

  If you suspect problems with the CPUfreq subsystem on your machine, you can also enable additional debug output. To do so, either use `cpufreq.debug=7` as boot parameter or execute the following command as `root`:

```
echo 7 > /sys/module/cpufreq/parameters/debug
```

  This will cause CPUfreq to log more information to `dmesg` on state transitions, which is useful for diagnosis. But as this additional output of kernel messages can be rather comprehensive, use it only if you are fairly sure that a problem exists.

11.7 For More Information

- A threepart, comprehensive article about tuning components with regards to power efficiency is available at the following URLs:
  - *Reduce Linux power consumption, Part 1: The CPUfreq subsystem*, available at http://www.ibm.com/developerworks/linux/library/l-cpufreq-1/?ca=dgr-lnxw03ReduceLXPWR-P1dth-LX&S_TACT=105AGX59&S_CMP=grlnxw03
  - *Reduce Linux power consumption, Part 2: General and governor-specific settings*, available at http://www.ibm.com/developerworks/linux/library/l-cpufreq-2/?ca=dgr-lnxw03ReduceLXPWR-P1dth-LX&S_TACT=105AGX59&S_CMP=grlnxw03
  - *Reduce Linux power consumption, Part 3: Tuning results*, available at http://www.ibm.com/developerworks/linux/library/l-cpufreq-3/?ca=dgr-lnxw03ReduceLXPWR-P1dth-LX&S_TACT=105AGX59&S_CMP=grlnxw03
- The LessWatts.org project deals with how to save power, reduce costs and increase efficiency on Linux systems. Find the project home page at http://

www.lesswatts.org/. The project page also holds an informative FAQs section at http://www.lesswatts.org/documentation/faq/index.php and provides useful tips and tricks. For tips dealing with the CPU level, refer to http://www.lesswatts.org/tips/cpu.php. For more information about powerTOP, refer to http://www.lesswatts.org/projects/powertop/.

- Platforms with a Baseboard Management Controller (BMC) may have additional power management configuration options accessible via the service processor. These configurations are vendor specific and therefore not subject of this guide. For more information, refer to the manuals provided by your vendor. For example, *HP ProLiant Server Power Management on SUSE Linux Enterprise Server 11—Integration Note* provides detailed information how the HP platform specific power management features interact with the Linux Kernel. The paper is available from http://h18004.www1.hp.com/products/servers/technology/whitepapers/os-techwp.html.

Partie V. Kernel Tuning

12 Installing Multiple Kernel Versions

openSUSE supports the parallel installation of multiple kernel versions. When installing a second kernel, a boot entry and an initrd are automatically created, so no further manual configuration is needed. When rebooting the machine, the newly added kernel is available as an additional boot option.

Using this functionality, you can safely test kernel updates while being able to always fall back to the proven former kernel. To do so, do not use the update tools (such as the YaST Online Update or the updater applet), but instead follow the process described in this chapter.

AVERTISSEMENT : Support Entitlement

Please be aware that you loose your entire support entitlement for the machine when installing a self-compiled or a third-party kernel. Only kernels shipped with openSUSE and kernels delivered via the official update channels for openSUSE are supported.

ASTUCE : Check Your Bootloader Configuration Kernel

It is recommended to check your bootloader config after having installed another kernel in order to set the default boot entry of your choice. See section « Configuring the Boot Loader with YaST » (Chapitre 9, *The Boot Loader GRUB*, ↑Reference) for more information. To change the default append line for new kernel installations, adjust `/etc/sysconfig/bootloader` prior to installing a new kernel. For more information refer to

section « The File `/etc/sysconfig/bootloader` » (Chapitre 9, *The Boot Loader GRUB*, ↑Reference).

12.1 Enabling and Configuring Multiversion Support

Installing multiple versions of a software package (multiversion support) is not enabled by default. To enable this feature, proceed as follows:

1. Open `/etc/zypp/zypp.conf` with the editor of your choice as `root`.
2. Search for the string `multiversion`. To enable multiversion for all kernel packages capable of this feature, uncomment the following line
   ```
   # multiversion = provides:multiversion(kernel)
   ```
3. To restrict multiversion support to certain kernel flavors, add the package names as a comma-separated list, to the `multiversion` option in `/etc/zypp/zypp.conf`—for example
   ```
   multiversion = kernel-default,kernel-default-base,kernel-source
   ```
4. Save your changes.

12.1.1 Automatically Deleting Unused Kernels

When frequently testing new kernels with multiversion support enabled, the boot menu quickly becomes confusing. Since a `/boot` usually has got limited space you also might run into trouble with `/boot` overflowing. While you may delete unused kernel versions manually with YaST or zypper (as described below), you can also configure `libzypp` to automatically delete kernels no longer used. By default no kernels are deleted.

1. Open `/etc/zypp/zypp.conf` with the editor of your choice as `root`.
2. Search for the string `multiversion.kernels` and activate this option by uncommenting the line. This option takes a comma separated list of the following values

2.6.32.12-0.7 **:** keep the kernel with the specified version number

latest: keep the kernel with the highest version number

latest-N: keep the kernel with the Nth highest version number

running keep the running kernel

oldest keep the kernel with the lowest version number (the one that was originally shipped with openSUSE)

oldest+N keep the kernel with the Nth lowest version number

Here are some examples

`multiversion.kernels = latest,running`
Keep the latest kernel and the one currently running one. This is similar to not enabling the multiversion feature at all, except that the old kernel is removed *after the next reboot* and not immediately after the installation.

`multiversion.kernels = latest,latest-1,running`
Keep the last two kernels and the one currently running.

`multiversion.kernels = latest,running,3.0.rc7-test`
Keep the latest kernel, the one currently running and *3.0.rc7-test*.

ASTUCE : Keep the `running` Kernel


Unless using special setups, you probably always want to keep the `running` kernel.

12.2 Installing/Removing Multiple Kernel Versions with YaST

1 Start YaST and open the software manager via *Software* > *Software Mannagment*.

2 List all packages capable of providing multiple versions by choosing *View* > *Package Groups* > *Multiversion Packages*.

Figure 12.1 *The YaST Software Manager - Multiversion View*

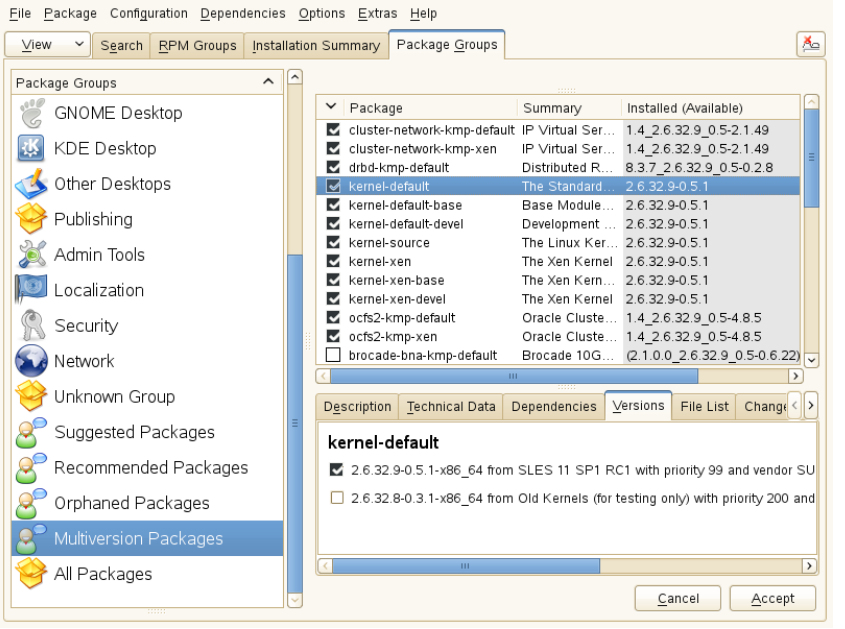

3 Select a package and open its *Version* tab in the bottom pane on the left.

4 To install a package, click its checkbox. A green check mark indicates it is selected for installation.

   To remove an already installed package (marked with a white check mark), click its checkbox until a red `X` indicates it is selected for removal.

5 Click *Accept* to start the installation.

12.3 Installing/Removing Multiple Kernel Versions with zypper

1 Use the command `zypper se -s 'kernel*'` to display a list of all kernel packages available:

```
S | Name           | Type       | Version         | Arch   | Repository
--+----------------+------------+-----------------+--------+-------------------
v | kernel-default | package    | 2.6.32.10-0.4.1 | x86_64 | Alternative Kernel
i | kernel-default | package    | 2.6.32.9-0.5.1  | x86_64 | (System Packages)
  | kernel-default | srcpackage | 2.6.32.10-0.4.1 | noarch | Alternative Kernel
i | kernel-default | package    | 2.6.32.9-0.5.1  | x86_64 | (System Packages)
...
```

2 Specify the exact version when installing:

```
zypper in kernel-default-2.6.32.10-0.4.1
```

3 When uninstalling a kernel, use the commands `zypper se -si 'kernel*'` to list all kernels installed and `zypper rm` *`PACKAGENAME-VERSION`* to remove the package.

13 Tuning I/O Performance

I/O scheduling controls how input/output operations will be submitted to storage. openSUSE offers various I/O algorithms—called `elevators`— suiting different workloads. Elevators can help to reduce seek operations, can prioritize I/O requests, or make sure, and I/O request is carried out before a given deadline.

Choosing the best suited I/O elevator not only depends on the workload, but on the hardware, too. Single ATA disk systems, SSDs, RAID arrays, or network storage systems, for example, each require different tuning strategies.

13.1 Switching I/O Scheduling

openSUSE lets you set a default I/O scheduler at boot-time, which can be changed on the fly per block device. This makes it possible to set different algorithms for e.g. the device hosting the system partition and the device hosting a database.

By default the `CFQ` (Completely Fair Queuing) scheduler is used. Change this default by entering the boot parameter

```
elevator=SCHEDULER
```

where *`SCHEDULER`* is one of `cfq`, `noop`, or `deadline`. See Section 13.2, « Available I/O Elevators » (p. 154) for details.

To change the elevator for a specific device in the running system, run the following command:

```
echo SCHEDULER > /sys/block/DEVICE/queue/scheduler
```

where *SCHEDULER* is one of `cfq`, `noop`, or `deadline` and *DEVICE* the block device (`sda` for example).

13.2 Available I/O Elevators

In the following elevators available on openSUSE are listed. Each elevator has a set of tunable parameters, which can be set with the following command:

```
echo VALUE > /sys/block/DEVICE/queue/iosched/TUNABLE
```

where *VALUE* is the desired value for the *TUNABLE* and *DEVICE* the block device.

To find out which elevator is the current default, run the following command. The currently selected scheduler is listed in brackets:

```
jupiter:~ # cat /sys/block/sda/queue/scheduler
noop deadline [cfq]
```

13.2.1 CFQ (Completely Fair Queuing)

`CFQ` is a fairness-oriented scheduler and is used by default on openSUSE. The algorithm assigns each thread a time slice in which it is allowed to submit I/O to disk. This way each thread gets a fair share of I/O throughput. It also allows assigning tasks I/O priorities which are taken into account during scheduling decisions (see `man 1 ionice`). The `CFQ` scheduler has the following tunable parameters:

`/sys/block/<device>/queue/iosched/slice_idle`
: When a task has no more I/O to submit in its time slice, the I/O scheduler waits for a while before scheduling the next thread to improve locality of I/O. For media where locality does not play a big role (SSDs, SANs with lots of disks) setting `/sys/block/<device>/queue/iosched/slice_idle` to `0` can improve the throughput considerably.

`/sys/block/<device>/queue/iosched/quantum`
: This option limits the maximum number of requests that are being processed by the device at once. The default value is `4`. For a storage with several disks, this setting can unnecessarily limit parallel processing of requests. Therefore, increasing the value can improve performance although this can cause that the latency of some I/O may be increased due to more requests being buffered inside the storage. When changing this value, you can also consider tuning `/sys/`

`block/<device>/queue/iosched/slice_async_rq` (the default value is `2`) which limits the maximum number of asynchronous requests—usually writing requests—that are submitted in one time slice.

`/sys/block/<device>/queue/iosched/low_latency`
: For workloads where the latency of I/O is crucial, setting `/sys/block/<device>/queue/iosched/low_latency` to `1` can help.

13.2.2 NOOP

A trivial scheduler that just passes down the I/O that comes to it. Useful for checking whether complex I/O scheduling decisions of other schedulers are not causing I/O performance regressions.

In some cases it can be helpful for devices that do I/O scheduling themselves, as intelligent storage, or devices that do not depend on mechanical movement, like SSDs. Usually, the `DEADLINE` I/O scheduler is a better choice for these devices, but due to less overhead `NOOP` may produce better performance on certain workloads.

13.2.3 DEADLINE

`DEADLINE` is a latency-oriented I/O scheduler. Each I/O request has got a deadline assigned. Usually, requests are stored in queues (read and write) sorted by sector numbers. The `DEADLINE` algorithm maintains two additional queues (read and write) where the requests are sorted by deadline. As long as no request has timed out, the « sector » queue is used. If timeouts occur, requests from the « deadline » queue are served until there are no more expired requests. Generally, the algorithm prefers reads over writes.

This scheduler can provide a superior throughput over the `CFQ` I/O scheduler in cases where several threads read and write and fairness is not an issue. For example, for several parallel readers from a SAN and for databases (especially when using « TCQ » disks). The `DEADLINE` scheduler has the following tunable parameters:

`/sys/block/<device>/queue/iosched/writes_starved`
: Controls how many reads can be sent to disk before it is possible to send writes. A value of `3` means, that three read operations are carried out for one write operation.

`/sys/block/<device>/queue/iosched/read_expire`
: Sets the deadline (current time plus the read_expire value) for read operations in milliseconds. The default is 500.

`/sys/block/<device>/queue/iosched/write_expire`
: `/sys/block/<device>/queue/iosched/read_expire` Sets the deadline (current time plus the read_expire value) for read operations in milliseconds. The default is 500.

13.3 I/O Barrier Tuning

Most file systems (XFS, ext3, ext4, reiserfs) send write barriers to disk after fsync or during transaction commits. Write barriers enforce proper ordering of writes, making volatile disk write caches safe to use (at some performance penalty). If your disks are battery-backed in one way or another, disabling barriers may safely improve performance.

Sending write barriers can be disabled using the `barrier=0` mount option (for ext3, ext4, and reiserfs), or using the `nobarrier` mount option (for XFS).

AVERTISSEMENT

Disabling barriers when disks cannot guarantee caches are properly written in case of power failure can lead to severe file system corruption and data loss.

14 Tuning the Task Scheduler

Modern operating systems, such as openSUSE®, normally run many different tasks at the same time. For example, you can be searching in a text file while receiving an e-mail and copying a big file to an external hard drive. These simple tasks require many additional processes to be run by the system. To provide each task with its required system resources, the Linux kernel needs a tool to distribute available system resources to individual tasks. And this is exactly what the *task scheduler* does.

The following sections explain the most important terms related to a process scheduling. They also introduce information about the task scheduler policy, scheduling algorithm, description of the task scheduler used by openSUSE, and references to other sources of relevant information.

14.1 Introduction

The Linux kernel controls the way tasks (or processes) are managed in the running system. The task scheduler, sometimes called *process scheduler*, is the part of the kernel that decides which task to run next. It is one of the core components of a multitasking operating system (such as Linux), being responsible for best utilizing system resources to guarantee that multiple tasks are being executed simultaneously.

14.1.1 Preemption

The theory behind task scheduling is very simple. If there are runnable processes in a system, at least one process must always be running. If there are more runnable

processes than processors in a system, not all the processes can be running all the time.

Therefore, some processes need to be stopped temporarily, or *suspended*, so that others can be running again. The scheduler decides what process in the queue will run next.

As already mentioned, Linux, like all other Unix variants, is a *multitasking* operating system. That means that several tasks can be running at the same time. Linux provides a so called *preemptive* multitasking, where the scheduler decides when a process is suspended. This forced suspension is called *preemption*. All Unix flavors have been providing preemptive multitasking since the beginning.

14.1.2 Timeslice

The time period for which a process will be running before it is *preempted* is defined in advance. It is called a process' *timeslice* and represents the amount of processor time that is provided to each process. By assigning timeslices, the scheduler makes global decisions for the running system, and prevents individual processes from dominating over the processor resources.

14.1.3 Process Priority

The scheduler evaluates processes based on their priority. To calculate the current priority of a process, the task scheduler uses complex algorithms. As a result, each process is given a value according to which it is « allowed » to run on a processor.

14.2 Process Classification

Processes are usually classified according to their purpose and behavior. Although the borderline is not always clearly distinct, generally two criteria are used to sort them. These criteria are independent and do not exclude each other.

One approach is to classify a process either *I/O-bound* or *processor-bound*.

I/O-bound
: I/O stands for Input/Output devices, such as keyboards, mice, or optical and hard disks. *I/O-bound processes* spend the majority of time submitting and waiting for

requests. They are run very frequently, but for short time intervals, not to block other processes waiting for I/O requests.

processor-bound
: On the other hand, *processor-bound* tasks use their time to execute a code, and usually run until they are preempted by the scheduler. They do not block processes waiting for I/O requests, and, therefore, can be run less frequently but for longer time intervals.

Another approach is to divide processes by either being *interactive*, *batch*, or *real-time* ones.

- *Interactive* processes spend a lot of time waiting for I/O requests, such as keyboard or mouse operations. The scheduler must wake up such process quickly on user request, or the user will find the environment unresponsive. The typical delay is approximately 100 ms. Office applications, text editors or image manipulation programs represent typical interactive processes.
- *Batch* processes often run in the background and do not need to be responsive. They usually receive lower priority from the scheduler. Multimedia converters, database search engines, or log files analyzers are typical examples of batch processes.
- *Real-time* processes must never be blocked by low-priority processes, and the scheduler guarantees a short response time to them. Applications for editing multimedia content are a good example here.

14.3 O(1) Scheduler

The Linux kernel version 2.6 introduced a new task scheduler, called O(1) scheduler (see Big O notation [http://en.wikipedia.org/wiki/Big_O_notation]), It was used as the default scheduler up to Kernel version 2.6.22. Its main task is to schedule tasks within a fixed amount of time, no matter how many runnable processes there are in the system.

The scheduler calculates the timeslices dynamically. However, to determine the appropriate timeslice is a complex task: Too long timeslices cause the system to be less interactive and responsive, while too short ones make the processor waste a lot of time on the overhead of switching the processes too frequently. The default timeslice is usually rather low, for example 20ms. The scheduler determines the timeslice based on priority of a process, which allows the processes with higher priority to run more often and for a longer time.

A process does not have to utilize all its timeslice at once. For instance, a process with a timeslice of 150ms does not have to be running for 150ms in one go. It can be running in five different schedule slots for 30ms instead. Interactive tasks typically benefit from this approach because they do not need such a large timeslice at once while they need to be responsive as long as possible.

The scheduler also assigns process priorities dynamically. It monitors the processes' behavior and, if needed, adjusts its priority. For example, a process which is being suspended for a long time is brought up by increasing its priority.

14.4 Completely Fair Scheduler

Since the Linux kernel version 2.6.23, a new approach has been taken to the scheduling of runnable processes. Completely Fair Scheduler (CFS) became the default Linux kernel scheduler. Since then, important changes and improvements have been made. The information in this chapter applies to openSUSE with kernel version 2.6.32 and higher (including 3.x kernels). The scheduler environment was divided into several parts, and three main new features were introduced:

Modular Scheduler Core
: The core of the scheduler was enhanced with *scheduling classes*. These classes are modular and represent scheduling policies.

Completely Fair Scheduler
: Introduced in kernel 2.6.23 and extended in 2.6.24, CFS tries to assure that each process obtains its « fair » share of the processor time.

Group Scheduling
: For example, if you split processes into groups according to which user is running them, CFS tries to provide each of these groups with the same amount of processor time.

As a result, CFS brings more optimized scheduling for both servers and desktops.

14.4.1 How CFS Works

CFS tries to guarantee a fair approach to each runnable task. To find the most balanced way of task scheduling, it uses the concept of *red-black tree*. A red-black

tree is a type of self-balancing data search tree which provides inserting and removing entries in a reasonable way so that it remains well balanced. For more information, see the wiki pages of Red-black tree [http://en.wikipedia.org/wiki/Red_black_tree].

When a task enters into the *run queue* (a planned time line of processes to be executed next), the scheduler records the current time. While the process waits for processor time, its « wait » value gets incremented by an amount derived from the total number of tasks currently in the run queue and the process priority. As soon as the processor runs the task, its « wait » value gets decremented. If the value drops below a certain level, the task is preempted by the scheduler and other tasks get closer to the processor. By this algorithm, CFS tries to reach the ideal state where the « wait » value is always zero.

14.4.2 Grouping Processes

Since the Linux kernel version 2.6.24, CFS can be tuned to be fair to users or groups rather than to tasks only. Runnable tasks are then grouped to form entities, and CFS tries to be fair to these entities instead of individual runnable tasks. The scheduler also tries to be fair to individual tasks within these entities.

Tasks can be grouped in two mutually exclusive ways:

- By user IDs
- By kernel control groups.

The way the kernel scheduler lets you group the runnable tasks depends on setting the kernel compile-time options `CONFIG_FAIR_USER_SCHED` and `CONFIG_FAIR_CGROUP_SCHED`. The default setting in openSUSE® 12.3 is to use control groups, which lets you create groups as needed. For more information, see Chapitre 10, *Kernel Control Groups* (p. 117).

14.4.3 Kernel Configuration Options

Basic aspects of the task scheduler behavior can be set through the kernel configuration options. Setting these options is part of the kernel compilation process. Because kernel compilation process is a complex task and out of this document's scope, refer

to relevant source of information (for example http://en.opensuse.org/Configure,_Build_and_Install_a_Custom_Linux_Kernel).

AVERTISSEMENT : Kernel Compilation

If you run openSUSE on a kernel that was not shipped with it, for example on a self-compiled kernel, you loose the entire support entitlement.

14.4.4 Terminology

Documents regarding task scheduling policy often use several technical terms which you need to know to understand the information correctly. Here are some of them:

Latency
: Delay between the time a process is scheduled to run and the actual process execution.

Granularity
: The relation between granularity and latency can be expressed by the following equation:

```
gran = ( lat / rtasks ) - ( lat / rtasks / rtasks )
```

where *gran* stands for granularity, *lat* stand for latency, and *rtasks* is the number of running tasks.

14.4.4.1 Scheduling Policies

The Linux kernel supports the following scheduling policies:

SCHED_FIFO
: Scheduling policy designed for special time-critical applications. It uses the First In-First Out scheduling algorithm.

SCHED_BATCH
: Scheduling policy designed for CPU-intensive tasks.

SCHED_IDLE
: Scheduling policy intended for *very* low prioritized tasks.

SCHED_OTHER
: Default Linux time-sharing scheduling policy used by the majority of processes.

SCHED_RR
: Similar to SCHED_FIFO, but uses the Round Robin scheduling algorithm.

14.4.5 Changing Real-time Attributes of Processes with chrt

The `chrt` command sets or retrieves the real-time scheduling attributes of a running process, or runs a command with the specified attributes. You can get or retrieve both the scheduling policy and priority of a process.

In the following examples, a process whose PID is 16244 is used.

To *retrieve* the real-time attributes of an existing task:

```
saturn.example.com:~ # chrt -p 16244
pid 16244's current scheduling policy: SCHED_OTHER
pid 16244's current scheduling priority: 0
```

Before setting a new scheduling policy on the process, you need to find out the minimum and maximum valid priorities for each scheduling algorithm:

```
saturn.example.com:~ # chrt -m
SCHED_OTHER min/max priority : 0/0
SCHED_FIFO min/max priority : 1/99
SCHED_RR min/max priority : 1/99
SCHED_BATCH min/max priority : 0/0
SCHED_IDLE min/max priority : 0/0
```

In the above example, SCHED_OTHER, SCHED_BATCH, SCHED_IDLE polices only allow for priority 0, while that of SCHED_FIFO and SCHED_RR can range from 1 to 99.

To set SCHED_BATCH scheduling policy:

```
saturn.example.com:~ # chrt -b -p 0 16244
saturn.example.com:~ # chrt -p 16244
pid 16244's current scheduling policy: SCHED_BATCH
pid 16244's current scheduling priority: 0
```

For more information on `chrt`, see its man page (`man 1 chrt`).

14.4.6 Runtime Tuning with sysctl

The `sysctl` interface for examining and changing kernel parameters at runtime introduces important variables by means of which you can change the default behavior of the task scheduler. The syntax of the `sysctl` is simple, and all the following commands must be entered on the command line as `root`.

To read a value from a kernel variable, enter

```
sysctl variable
```

To assign a value, enter

```
sysctl variable=value
```

To get a list of all scheduler related `sysctl` variables, enter

```
sysctl -A | grep "sched" | grep -v"domain"
```

```
saturn.example.com:~ # sysctl -A | grep "sched" | grep -v "domain"
kernel.sched_child_runs_first = 0
kernel.sched_min_granularity_ns = 1000000
kernel.sched_latency_ns = 5000000
kernel.sched_wakeup_granularity_ns = 1000000
kernel.sched_shares_ratelimit = 250000
kernel.sched_tunable_scaling = 1
kernel.sched_shares_thresh = 4
kernel.sched_features = 15834238
kernel.sched_migration_cost = 500000
kernel.sched_nr_migrate = 32
kernel.sched_time_avg = 1000
kernel.sched_rt_period_us = 1000000
kernel.sched_rt_runtime_us = 950000
kernel.sched_compat_yield = 0
```

Note that variables ending with « _ns » and « _us » accept values in nanoseconds and microseconds, respectively.

A list of the most important task scheduler `sysctl` tuning variables (located at `/proc/sys/kernel/`) with a short description follows:

`sched_child_runs_first`
: A freshly forked child runs before the parent continues execution. Setting this parameter to `1` is beneficial for an application in which the child performs an

execution after fork. For example `make -j<NO_CPUS>` performs better when sched_child_runs_first is turned off. The default value is `0`.

`sched_compat_yield`
Enables the aggressive yield behavior of the old 0(1) scheduler. Java applications that use synchronization extensively perform better with this value set to `1`. Only use it when you see a drop in performance. The default value is `0`.

Expect applications that depend on the sched_yield() syscall behavior to perform better with the value set to `1`.

`sched_migration_cost`
Amount of time after the last execution that a task is considered to be « cache hot » in migration decisions. A « hot » task is less likely to be migrated, so increasing this variable reduces task migrations. The default value is `500000` (ns).

If the CPU idle time is higher than expected when there are runnable processes, try reducing this value. If tasks bounce between CPUs or nodes too often, try increasing it.

`sched_latency_ns`
Targeted preemption latency for CPU bound tasks. Increasing this variable increases a CPU bound task's timeslice. A task's timeslice is its weighted fair share of the scheduling period:

timeslice = scheduling period * (task's weight/total weight of tasks in the run queue)

The task's weight depends on the task's nice level and the scheduling policy. Minimum task weight for a SCHED_OTHER task is 15, corresponding to nice 19. The maximum task weight is 88761, corresponding to nice -20.

Timeslices become smaller as the load increases. When the number of runnable tasks exceeds `sched_latency_ns`/`sched_min_granularity_ns`, the slice becomes number_of_running_tasks * `sched_min_granularity_ns`. Prior to that, the slice is equal to `sched_latency_ns`.

This value also specifies the maximum amount of time during which a sleeping task is considered to be running for entitlement calculations. Increasing this variable increases the amount of time a waking task may consume before being preempted, thus increasing scheduler latency for CPU bound tasks. The default value is `20000000` (ns).

`sched_min_granularity_ns`
Minimal preemption granularity for CPU bound tasks. See `sched_latency_ns` for details. The default value is `4000000` (ns).

`sched_wakeup_granularity_ns`
The wake-up preemption granularity. Increasing this variable reduces wake-up preemption, reducing disturbance of compute bound tasks. Lowering it improves wake-up latency and throughput for latency critical tasks, particularly when a short duty cycle load component must compete with CPU bound components. The default value is `5000000` (ns).

AVERTISSEMENT

Settings larger than half of `sched_latency_ns` will result in zero wake-up preemption and short duty cycle tasks will be unable to compete with CPU hogs effectively.

`sched_rt_period_us`
Period over which real-time task bandwidth enforcement is measured. The default value is `1000000` (µs).

`sched_rt_runtime_us`
Quantum allocated to real-time tasks during sched_rt_period_us. Setting to -1 disables RT bandwidth enforcement. By default, RT tasks may consume 95%CPU/sec, thus leaving 5%CPU/sec or 0.05s to be used by SCHED_OTHER tasks.

`sched_features`
Provides information about specific debugging features.

`sched_stat_granularity_ns`
Specifies the granularity for collecting task scheduler statistics.

`sched_nr_migrate`
Controls how many tasks can be moved across processors through migration software interrupts (softirq). If a large number of tasks is created by SCHED_OTHER policy, they will all be run on the same processor. The default value is `32`. Increasing this value gives a performance boost to large SCHED_OTHER threads at the expense of increased latencies for real-time tasks.

14.4.7 Debugging Interface and Scheduler Statistics

CFS comes with a new improved debugging interface, and provides runtime statistics information. Relevant files were added to the `/proc` file system, which can be examined simply with the `cat` or `less` command. A list of the related `/proc` files follows with their short description:

`/proc/sched_debug`
: Contains the current values of all tunable variables (see Section 14.4.6, « Runtime Tuning with `sysctl` » (p. 164)) that affect the task scheduler behavior, CFS statistics, and information about the run queue on all available processors.

```
saturn.example.com:~ # less /proc/sched_debug
Sched Debug Version: v0.09, 2.6.32.8-0.3-default #1
now at 2413026096.408222 msecs
  .jiffies                                 : 4898148820
  .sysctl_sched_latency                    : 5.000000
  .sysctl_sched_min_granularity            : 1.000000
  .sysctl_sched_wakeup_granularity         : 1.000000
  .sysctl_sched_child_runs_first           : 0.000000
  .sysctl_sched_features                   : 15834238
  .sysctl_sched_tunable_scaling            : 1 (logaritmic)

cpu#0, 1864.411 MHz
  .nr_running                    : 1
  .load                          : 1024
  .nr_switches                   : 37539000
  .nr_load_updates               : 22950725
[...]
cfs_rq[0]:/
  .exec_clock                    : 52940326.803842
  .MIN_vruntime                  : 0.000001
  .min_vruntime                  : 54410632.307072
  .max_vruntime                  : 0.000001
[...]
rt_rq[0]:/
  .rt_nr_running                 : 0
  .rt_throttled                  : 0
  .rt_time                       : 0.000000
  .rt_runtime                    : 950.000000

runnable tasks:
  task  PID   tree-key    switches prio exec-runtime    sum-exec sum-
sleep
------------------------------------------------------------------------
R cat 16884 54410632.307072    0   120  54410632.307072 13.836804
 0.000000
```

`/proc/schedstat`
: Displays statistics relevant to the current run queue. Also domain-specific statistics for SMP systems are displayed for all connected processors. Because the output format is not user-friendly, read the contents of `/usr/src/linux/Documentation/scheduler/sched-stats.txt` for more information.

`/proc/PID/sched`
: Displays scheduling information on the process with id *PID*.

```
saturn.example.com:~ # cat /proc/`pidof nautilus`/sched
 nautilus (4009, #threads: 1)
 -------------------------------------------------------------
 se.exec_start                      :    2419575150.560531
 se.vruntime                        :      54549795.870151
 se.sum_exec_runtime                :       4867855.829415
 se.avg_overlap                     :              0.401317
 se.avg_wakeup                      :              3.247651
 se.avg_running                     :              0.323432
 se.wait_start                      :              0.000000
 se.sleep_start                     :    2419575150.560531
 [...]
 nr_voluntary_switches              :                938552
 nr_involuntary_switches            :                 71872
 se.load.weight                     :                  1024
 policy                             :                     0
 prio                               :                   120
 clock-delta                        :                   109
```

14.5 For More Information

To get a compact knowledge about Linux kernel task scheduling, you need to explore several information sources. Here are some of them:

- For task scheduler System Calls description, see the relevant manual page (for example `man 2 sched_setaffinity`).
- General information on scheduling is described in Scheduling [http://en.wikipedia.org/wiki/Scheduling_(computing)] wiki page.
- General information on Linux task scheduling is described in Inside the Linux scheduler [http://www.ibm.com/developerworks/linux/library/l-scheduler/].
- Information specific to Completely Fair Scheduler is available in Multiprocessing with the Completely Fair Scheduler [http://www.ibm.com/developerworks/linux/library/l-cfs/?ca=dgr-lnxw06CFC4Linux]

- Information specific to tuning Completely Fair Scheduler is available in Tuning the Linux Kernel's Completely Fair Scheduler [http://www.hotaboutlinux.com/2010/01/tuning-the-linux-kernels-completely-fair-scheduler/]
- A useful lecture on Linux scheduler policy and algorithm is available in http://www.inf.fu-berlin.de/lehre/SS01/OS/Lectures/Lecture08.pdf.
- A good overview of Linux process scheduling is given in *Linux Kernel Development* by Robert Love (ISBN-10: 0-672-32512-8). See http://www.informit.com/articles/article.aspx?p=101760.
- A very comprehensive overview of the Linux kernel internals is given in *Understanding the Linux Kernel* by Daniel P. Bovet and Marco Cesati (ISBN 978-0-596-00565-8).
- Technical information about task scheduler is covered in files under `/usr/src/linux/Documentation/scheduler`.

Tuning the Memory Management Subsystem

15

In order to understand and tune the memory management behavior of the kernel, it is important to first have an overview of how it works and cooperates with other subsystems.

The memory management subsystem, also called the virtual memory manager, will subsequently be referred to as « VM ». The role of the VM is to manage the allocation of physical memory (RAM) for the entire kernel and user programs. It is also responsible for providing a virtual memory environment for user processes (managed via POSIX APIs with Linux extensions). Finally, the VM is responsible for freeing up RAM when there is a shortage, either by trimming caches or swapping out « anonymous » memory.

The most important thing to understand when examining and tuning VM is how its caches are managed. The basic goal of the VM's caches is to minimize the cost of I/O as generated by swapping and file system operations (including network file systems). This is achieved by avoiding I/O completely, or by submitting I/O in better patterns.

Free memory will be used and filled up by these caches as required. The more memory is available for caches and anonymous memory, the more effectively caches and swapping will operate. However, if a memory shortage is encountered, caches will be trimmed or memory will be swapped out.

For a particular workload, the first thing that can be done to improve performance is to increase memory and reduce the frequency that memory must be trimmed or swapped. The second thing is to change the way caches are managed by changing kernel parameters.

Finally, the workload itself should be examined and tuned as well. If an application is allowed to run more processes or threads, effectiveness of VM caches can be reduced, if each process is operating in its own area of the file system. Memory overheads are also increased. If applications allocate their own buffers or caches, larger caches will mean that less memory is available for VM caches. However, more processes and threads can mean more opportunity to overlap and pipeline I/O, and may take better advantage of multiple cores. Experimentation will be required for the best results.

15.1 Memory Usage

Memory allocations in general can be characterized as « pinned » (also known as « unreclaimable »), « reclaimable » or « swappable ».

15.1.1 Anonymous Memory

Anonymous memory tends to be program heap and stack memory (for example, `>malloc()`). It is reclaimable, except in special cases such as `mlock` or if there is no available swap space. Anonymous memory must be written to swap before it can be reclaimed. Swap I/O (both swapping in and swapping out pages) tends to be less efficient than pagecache I/O, due to allocation and access patterns.

15.1.2 Pagecache

A cache of file data. When a file is read from disk or network, the contents are stored in pagecache. No disk or network access is required, if the contents are up-to-date in pagecache. tmpfs and shared memory segments count toward pagecache.

When a file is written to, the new data is stored in pagecache before being written back to a disk or the network (making it a write-back cache). When a page has new data not written back yet, it is called « dirty ». Pages not classified as dirty are « clean ». Clean pagecache pages can be reclaimed if there is a memory shortage by simply freeing them. Dirty pages must first be made clean before being reclaimed.

15.1.3 Buffercache

This is a type of pagecache for block devices (for example, /dev/sda). A file system typically uses the buffercache when accessing its on-disk « meta-data » structures

such as inode tables, allocation bitmaps, and so forth. Buffercache can be reclaimed similarly to pagecache.

15.1.4 Buffer Heads

Buffer heads are small auxiliary structures that tend to be allocated upon pagecache access. They can generally be reclaimed easily when the pagecache or buffercache pages are clean.

15.1.5 Writeback

As applications write to files, the pagecache (and buffercache) becomes dirty. When pages have been dirty for a given amount of time, or when the amount of dirty memory reaches a particular percentage of RAM, the kernel begins writeback. Flusher threads perform writeback in the background and allow applications to continue running. If the I/O cannot keep up with applications dirtying pagecache, and dirty data reaches a critical percentage of RAM, then applications begin to be throttled to prevent dirty data exceeding this threshold.

15.1.6 Readahead

The VM monitors file access patterns and may attempt to perform readahead. Readahead reads pages into the pagecache from the file system that have not been requested yet. It is done in order to allow fewer, larger I/O requests to be submitted (more efficient). And for I/O to be pipelined (I/O performed at the same time as the application is running).

15.1.7 VFS caches

15.1.7.1 Inode Cache

This is an in-memory cache of the inode structures for each file system. These contain attributes such as the file size, permissions and ownership, and pointers to the file data.

15.1.7.2 Directory Entry Cache

This is an in-memory cache of the directory entries in the system. These contain a name (the name of a file), the inode which it refers to, and children entries. This cache is used when traversing the directory structure and accessing a file by name.

15.2 Reducing Memory Usage

15.2.1 Reducing malloc (Anonymous) Usage

Applications running on openSUSE 12.3 can allocate more memory compared to openSUSE 10. This is due to `glibc` changing its default behavior while allocating userspace memory. Please see `http://www.gnu.org/s/libc/manual/html_node/Malloc-Tunable-Parameters.html` for explanation of these parameters.

To restore a openSUSE 10-like behavior, M_MMAP_THRESHOLD should be set to 128*1024. This can be done with mallopt() call from the application, or via setting MALLOC_MMAP_THRESHOLD environment variable before running the application.

15.2.2 Reducing Kernel Memory Overheads

Kernel memory that is reclaimable (caches, described above) will be trimmed automatically during memory shortages. Most other kernel memory can not be easily reduced but is a property of the workload given to the kernel.

Reducing the requirements of the userspace workload will reduce the kernel memory usage (fewer processes, fewer open files and sockets, etc.)

15.2.3 Memory Controller (Memory Cgroups)

If the memory cgroups feature is not needed, it can be switched off by passing cgroup_disable=memory on the kernel command line, reducing memory consumption of the kernel a bit.

15.3 Virtual Memory Manager (VM) Tunable Parameters

When tuning the VM it should be understood that some of the changes will take time to affect the workload and take full effect. If the workload changes throughout the day, it may behave very differently at different times. A change that increases throughput under some conditions may decrease it under other conditions.

15.3.1 Reclaim Ratios

`/proc/sys/vm/swappiness`

This control is used to define how aggressively the kernel swaps out anonymous memory relative to pagecache and other caches. Increasing the value increases the amount of swapping. The default value is `60`.

Swap I/O tends to be much less efficient than other I/O. However, some pagecache pages will be accessed much more frequently than less used anonymous memory. The right balance should be found here.

If swap activity is observed during slowdowns, it may be worth reducing this parameter. If there is a lot of I/O activity and the amount of pagecache in the system is rather small, or if there are large dormant applications running, increasing this value might improve performance.

Note that the more data is swapped out, the longer the system will take to swap data back in when it is needed.

`/proc/sys/vm/vfs_cache_pressure`
: This variable controls the tendency of the kernel to reclaim the memory which is used for caching of VFS caches, versus pagecache and swap. Increasing this value increases the rate at which VFS caches are reclaimed.

  It is difficult to know when this should be changed, other than by experimentation. The `slabtop` command (part of the package `procps`) shows top memory objects used by the kernel. The vfs caches are the "dentry" and the "*_inode_cache" objects. If these are consuming a large amount of memory in relation to pagecache, it may be worth trying to increase pressure. Could also help to reduce swapping. The default value is `100`.

`/proc/sys/vm/min_free_kbytes`
: This controls the amount of memory that is kept free for use by special reserves including « atomic » allocations (those which cannot wait for reclaim). This should not normally be lowered unless the system is being very carefully tuned for memory usage (normally useful for embedded rather than server applications). If « page allocation failure » messages and stack traces are frequently seen in logs, min_free_kbytes could be increased until the errors disappear. There is no need for concern, if these messages are very infrequent. The default value depends on the amount of RAM.

15.3.2 Writeback Parameters

One important change in writeback behavior since openSUSE 10 is that modification to file-backed mmap() memory is accounted immediately as dirty memory (and subject to writeback). Whereas previously it would only be subject to writeback after it was unmapped, upon an msync() system call, or under heavy memory pressure.

Some applications do not expect mmap modifications to be subject to such writeback behavior, and performance can be reduced. Berkeley DB (and applications using it) is one known example that can cause problems. Increasing writeback ratios and times can improve this type of slowdown.

`/proc/sys/vm/dirty_background_ratio`
: This is the percentage of the total amount of free and reclaimable memory. When the amount of dirty pagecache exceeds this percentage, writeback threads start writing back dirty memory. The default value is `10` (%).

`/proc/sys/vm/dirty_ratio`

Similar percentage value as above. When this is exceeded, applications that want to write to the pagecache are blocked and start performing writeback as well. The default value is `40` (%).

These two values together determine the pagecache writeback behavior. If these values are increased, more dirty memory is kept in the system for a longer time. With more dirty memory allowed in the system, the chance to improve throughput by avoiding writeback I/O and to submitting more optimal I/O patterns increases. However, more dirty memory can either harm latency when memory needs to be reclaimed or at data integrity (sync) points when it needs to be written back to disk.

15.3.3 Readahead parameters

`/sys/block/<bdev>/queue/read_ahead_kb`

If one or more processes are sequentially reading a file, the kernel reads some data in advance (ahead) in order to reduce the amount of time that processes have to wait for data to be available. The actual amount of data being read in advance is computed dynamically, based on how much "sequential" the I/O seems to be. This parameter sets the maximum amount of data that the kernel reads ahead for a single file. If you observe that large sequential reads from a file are not fast enough, you can try increasing this value. Increasing it too far may result in readahead thrashing where pagecache used for readahead is reclaimed before it can be used, or slowdowns due to a large amount of useless I/O. The default value is `512` (kb).

15.3.4 Further VM Parameters

For the complete list of the VM tunable parameters, see `/usr/src/linux/Documentation/sysctl/vm.txt` (available after having installed the `kernel-source` package).

15.4 Non-Uniform Memory Access (NUMA)

Another increasingly important role of the VM is to provide good NUMA allocation strategies. NUMA stands for non-uniform memory access, and most of today's multi-

socket servers are NUMA machines. NUMA is a secondary concern to managing swapping and caches in terms of performance, and there are lots of documents about improving NUMA memory allocations. One particular parameter interacts with page reclaim:

`/proc/sys/vm/zone_reclaim_mode`
: This parameter controls whether memory reclaim is performed on a local NUMA node even if there is plenty of memory free on other nodes. This parameter is automatically turned on on machines with more pronounced NUMA characteristics.

  If the VM caches are not being allowed to fill all of memory on a NUMA machine, it could be due to zone_reclaim_mode being set. Setting to 0 will disable this behavior.

15.5 Monitoring VM Behavior

Some simple tools that can help monitor VM behavior:

1. vmstat: This tool gives a good overview of what the VM is doing. See Section 2.1.1, « `vmstat` » (p. 10) for details.

2. `/proc/meminfo`: This file gives a detailed breakdown of where memory is being used. See Section 2.4.2, « Detailed Memory Usage: `/proc/meminfo` » (p. 28) for details.

3. `slabtop`: This tool provides detailed information about kernel slab memory usage. buffer_head, dentry, inode_cache, ext3_inode_cache, etc. are the major caches. This command is available with the package `procps`.

16 Tuning the Network

The network subsystem is rather complex and its tuning highly depends on the system use scenario and also on external factors such as software clients or hardware components (switches, routers, or gateways) in your network. The Linux kernel aims more at reliability and low latency than low overhead and high throughput. Other settings can mean less security, but better performance.

16.1 Configurable Kernel Socket Buffers

Networking is largely based on the TCP/IP protocol and a socket interface for communication; for more information about TCP/IP, see Chapitre 13, *Basic Networking* (↑Reference). The Linux kernel handles data it receives or sends via the socket interface in socket buffers. These kernel socket buffers are tunable.

IMPORTANT : TCP Autotuning

Since kernel version 2.6.17 full autotuning with 4 MB maximum buffer size exists. This means that manual tuning in most cases will not improve networking performance considerably. It is often the best not to touch the following variables, or, at least, to check the outcome of tuning efforts carefully.

If you update from an older kernel, it is recommended to remove manual TCP tunings in favor of the autotuning feature.

The special files in the /proc file system can modify the size and behavior of kernel socket buffers; for general information about the /proc file system, see Section 2.6, « The /proc File System » (p. 33). Find networking related files in:

```
/proc/sys/net/core
/proc/sys/net/ipv4
/proc/sys/net/ipv6
```

General net variables are explained in the kernel documentation (linux/Documentation/sysctl/net.txt). Special ipv4 variables are explained in linux/Documentation/networking/ip-sysctl.txt and linux/Documentation/networking/ipvs-sysctl.txt.

In the /proc file system, for example, it is possible to either set the Maximum Socket Receive Buffer and Maximum Socket Send Buffer for all protocols, or both these options for the TCP protocol only (in ipv4) and thus overriding the setting for all protocols (in core).

/proc/sys/net/ipv4/tcp_moderate_rcvbuf
: If /proc/sys/net/ipv4/tcp_moderate_rcvbuf is set to 1, autotuning is active and buffer size is adjusted dynamically.

/proc/sys/net/ipv4/tcp_rmem
: The three values setting the minimum, initial, and maximum size of the Memory Receive Buffer per connection. They define the actual memory usage, not just TCP window size.

/proc/sys/net/ipv4/tcp_wmem
: The same as tcp_rmem, but just for Memory Send Buffer per connection.

/proc/sys/net/core/rmem_max
: Set to limit the maximum receive buffer size that applications can request.

/proc/sys/net/core/wmem_max
: Set to limit the maximum send buffer size that applications can request.

Via /proc it is possible to disable TCP features that you do not need (all TCP features are switched on by default). For example, check the following files:

/proc/sys/net/ipv4/tcp_timestamps
: TCP timestamps are defined in RFC1323.

/proc/sys/net/ipv4/tcp_window_scaling
: TCP window scaling is also defined in RFC1323.

`/proc/sys/net/ipv4/tcp_sack`
Select acknowledgments (SACKS).

Use `sysctl` to read or write variables of the `/proc` file system. `sysctl` is preferable to `cat` (for reading) and `echo` (for writing), because it also reads settings from `/etc/sysctl.conf` and, thus, those settings survive reboots reliably. With `sysctl` you can read all variables and their values easily; as `root` use the following command to list TCP related settings:

```
sysctl -a | grep tcp
```

REMARQUE : Side-Effects of Tuning Network Variables

Tuning network variables can affect other system resources such as CPU or memory use.

16.2 Detecting Network Bottlenecks and Analyzing Network Traffic

Before starting with network tuning, it is important to isolate network bottlenecks and network traffic patterns. There are some tools that can help you with detecting those bottlenecks.

The following tools can help analyzing your network traffic: `netstat`, `tcpdump`, and `wireshark`. Wireshark is a network traffic analyzer.

16.3 Netfilter

The Linux firewall and masquerading features are provided by the Netfilter kernel modules. This is a highly configurable rule based framework. If a rule matches a packet, Netfilter accepts or denies it or takes special action (« target ») as defined by rules such as address translation.

There are quite some properties, Netfilter is able to take into account. Thus, the more rules are defined, the longer packet processing may last. Also advanced connection tracking could be rather expensive and, thus, slowing down overall networking.

For more information, see the home page of the Netfilter and iptables project, http://www.netfilter.org

16.4 For More Information

- Eduardo Ciliendo, Takechika Kunimasa: « Linux Performance and Tuning Guidelines » (2007), esp. sections 1.5, 3.5, and 4.7: http://www.redbooks.ibm.com/redpapers/abstracts/redp4285.html
- John Heffner, Matt Mathis: « Tuning TCP for Linux 2.4 and 2.6 » (2006): http://www.psc.edu/networking/projects/tcptune/#Linux

Partie VI. Handling System Dumps

17 Tracing Tools

openSUSE comes with a number of tools that help you obtain useful information about your system. You can use the information for various purposes, for example, to debug and find problems in your program, to discover places causing performance drops, or to trace a running process to find out what system resources it uses. The tools are mostly part of the installation media, otherwise you can install them from the downloadable SUSE Software Development Kit.

REMARQUE : Tracing and Impact on Performance

While a running process is being monitored for system or library calls, the performance of the process is heavily reduced. You are advised to use tracing tools only for the time you need to collect the data.

17.1 Tracing System Calls with strace

The `strace` command traces system calls of a process and signals received by the process. `strace` can either run a new command and trace its system calls, or you can attach `strace` to an already running command. Each line of the command's output contains the system call name, followed by its arguments in parenthesis and its return value.

To run a new command and start tracing its system calls, enter the command to be monitored as you normally do, and add `strace` at the beginning of the command line:

```
tux@mercury:~> strace ls
execve("/bin/ls", ["ls"], [/* 52 vars */]) = 0
brk(0)                                  = 0x618000
mmap(NULL, 4096, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) \
 = 0x7f9848667000
mmap(NULL, 4096, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) \
 = 0x7f9848666000
access("/etc/ld.so.preload", R_OK)      = -1 ENOENT \
(No such file or directory)
open("/etc/ld.so.cache", O_RDONLY)      = 3
fstat(3, {st_mode=S_IFREG|0644, st_size=200411, ...}) = 0
mmap(NULL, 200411, PROT_READ, MAP_PRIVATE, 3, 0) = 0x7f9848635000
close(3)                                = 0
open("/lib64/librt.so.1", O_RDONLY)     = 3
[...]
mmap(NULL, 4096, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) \
= 0x7fd780f79000
write(1, "Desktop\nDocuments\nbin\ninst-sys\n", 31Desktop
Documents
bin
inst-sys
) = 31
close(1)                                = 0
munmap(0x7fd780f79000, 4096)            = 0
close(2)                                = 0
exit_group(0)                           = ?
```

To attach `strace` to an already running process, you need to specify the `-p` with the process ID (`PID`) of the process that you want to monitor:

```
tux@mercury:~> strace -p `pidof mysqld`
Process 2868 attached - interrupt to quit
select(15, [13 14], NULL, NULL, NULL)   = 1 (in [14])
fcntl(14, F_SETFL, O_RDWR|O_NONBLOCK)   = 0
accept(14, {sa_family=AF_FILE, NULL}, [2]) = 31
fcntl(14, F_SETFL, O_RDWR)              = 0
getsockname(31, {sa_family=AF_FILE, path="/var/run/mysql"}, [28]) = 0
fcntl(31, F_SETFL, O_RDONLY)            = 0
fcntl(31, F_GETFL)                      = 0x2 (flags O_RDWR)
fcntl(31, F_SETFL, O_RDWR|O_NONBLOCK)   = 0
[...]
setsockopt(31, SOL_IP, IP_TOS, [8], 4)  = -1 EOPNOTSUPP (Operation \
not supported)
clone(child_stack=0x7fd1864801f0, flags=CLONE_VM|CLONE_FS|CLONE_ \
FILES|CLONE_SIGHAND|CLONE_THREAD|CLONE_SYSVSEM|CLONE_SETTLS|CLONE_ \
PARENT_SETTID|CLONE_CHILD_CLEARTID, parent_tidptr=0x7fd1864809e0, \
tls=0x7fd186480910, child_tidptr=0x7fd1864809e0) = 21993
select(15, [13 14], NULL, NULL, NULL
```

The `-e` option understands several sub-options and arguments. For example, to trace all attempts to open or write to a particular file, use the following:

```
tux@mercury:~> strace -e trace=open,write ls ~
open("/etc/ld.so.cache", O_RDONLY)       = 3
open("/lib64/librt.so.1", O_RDONLY)      = 3
open("/lib64/libselinux.so.1", O_RDONLY) = 3
open("/lib64/libacl.so.1", O_RDONLY)     = 3
open("/lib64/libc.so.6", O_RDONLY)       = 3
open("/lib64/libpthread.so.0", O_RDONLY) = 3
[...]
open("/usr/lib/locale/cs_CZ.utf8/LC_CTYPE", O_RDONLY) = 3
open(".", O_RDONLY|O_NONBLOCK|O_DIRECTORY|O_CLOEXEC) = 3
write(1, "addressbook.db.bak\nbin\ncxoffice\n"..., 311) = 311
```

To trace only network related system calls, use `-e trace=network`:

```
tux@mercury:~> strace -e trace=network -p 26520
Process 26520 attached - interrupt to quit
socket(PF_NETLINK, SOCK_RAW, 0)         = 50
bind(50, {sa_family=AF_NETLINK, pid=0, groups=00000000}, 12) = 0
getsockname(50, {sa_family=AF_NETLINK, pid=26520, groups=00000000}, \
[12]) = 0
sendto(50, "\24\0\0\0\26\0\1\3~p\315K\0\0\0\0\0\0\0\0", 20, 0,
{sa_family=AF_NETLINK, pid=0, groups=00000000}, 12) = 20
[...]
```

The `-c` calculates the time the kernel spent on each system call:

```
tux@mercury:~> strace -c find /etc -name xorg.conf
/etc/X11/xorg.conf
% time     seconds  usecs/call     calls    errors syscall
------ ----------- ----------- --------- --------- ----------------
 32.38    0.000181         181         1           execve
 22.00    0.000123           0       576           getdents64
 19.50    0.000109           0       917        31 open
 19.14    0.000107           0       888           close
  4.11    0.000023           2        10           mprotect
  0.00    0.000000           0         1           write
[...]
  0.00    0.000000           0         1           getrlimit
  0.00    0.000000           0         1           arch_prctl
  0.00    0.000000           0         3         1 futex
  0.00    0.000000           0         1           set_tid_address
  0.00    0.000000           0         4           fadvise64
  0.00    0.000000           0         1           set_robust_list
------ ----------- ----------- --------- --------- ----------------
100.00    0.000559                  3633        33 total
```

To trace all child processes of a process, use `-f`:

```
tux@mercury:~> strace -f rcapache2 status
execve("/usr/sbin/rcapache2", ["rcapache2", "status"], [/* 81 vars */]) = 0
```

```
brk(0)                                  = 0x69e000
mmap(NULL, 4096, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) \
= 0x7f3bb553b000
mmap(NULL, 4096, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) \
= 0x7f3bb553a000
[...]
[pid  4823] rt_sigprocmask(SIG_SETMASK, [],  <unfinished ...>
[pid  4822] close(4 <unfinished ...>
[pid  4823] <... rt_sigprocmask resumed> NULL, 8) = 0
[pid  4822] <... close resumed> )       = 0
[...]
[pid  4825] mprotect(0x7fc42cbbd000, 16384, PROT_READ) = 0
[pid  4825] mprotect(0x60a000, 4096, PROT_READ) = 0
[pid  4825] mprotect(0x7fc42cde4000, 4096, PROT_READ) = 0
[pid  4825] munmap(0x7fc42cda2000, 261953) = 0
[...]
[pid  4830] munmap(0x7fb1fff10000, 261953) = 0
[pid  4830] rt_sigprocmask(SIG_BLOCK, NULL, [], 8) = 0
[pid  4830] open("/dev/tty", O_RDWR|O_NONBLOCK) = 3
[pid  4830] close(3)
[...]
read(255, "\n\n# Inform the caller not only v"..., 8192) = 73
rt_sigprocmask(SIG_BLOCK, NULL, [], 8)  = 0
rt_sigprocmask(SIG_BLOCK, NULL, [], 8)  = 0
exit_group(0)
```

If you need to analyze the output of `strace` and the output messages are too long to be inspected directly in the console window, use `-o`. In that case, unnecessary messages, such as information about attaching and detaching processes, are suppressed. You can also suppress these messages (normally printed on the standard output) with `-q`. To optionally prepend timestamps to each line with a system call, use `-t`:

```
tux@mercury:~> strace -t -o strace_sleep.txt sleep 1; more strace_sleep.txt
08:44:06 execve("/bin/sleep", ["sleep", "1"], [/* 81 vars */]) = 0
08:44:06 brk(0)                         = 0x606000
08:44:06 mmap(NULL, 4096, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, \
-1, 0) = 0x7f8e78cc5000
[...]
08:44:06 close(3)                       = 0
08:44:06 nanosleep({1, 0}, NULL)        = 0
08:44:07 close(1)                       = 0
08:44:07 close(2)                       = 0
08:44:07 exit_group(0)                  = ?
```

The behavior and output format of strace can be largely controlled. For more information, see the relevant manual page (man 1 strace).

17.2 Tracing Library Calls with ltrace

`ltrace` traces dynamic library calls of a process. It is used in a similar way to `strace`, and most of their parameters have a very similar or identical meaning. By default, `ltrace` uses `/etc/ltrace.conf` or `~/.ltrace.conf` configuration files. You can, however, specify an alternative one with the `-F` *`config_file`* option.

In addition to library calls, `ltrace` with the `-S` option can trace system calls as well:

```
tux@mercury:~> ltrace -S -o ltrace_find.txt find /etc -name \
xorg.conf; more ltrace_find.txt
SYS_brk(NULL)                                          = 0x00628000
SYS_mmap(0, 4096, 3, 34, 0xffffffff)                   = 0x7f1327ea1000
SYS_mmap(0, 4096, 3, 34, 0xffffffff)                   = 0x7f1327ea0000
[...]
fnmatch("xorg.conf", "xorg.conf", 0)                   = 0
free(0x0062db80)                                       = <void>
__errno_location()                                     = 0x7f1327e5d698
__ctype_get_mb_cur_max(0x7fff25227af0, 8192, 0x62e020, -1, 0) = 6
__ctype_get_mb_cur_max(0x7fff25227af0, 18, 0x7f1327e5d6f0, 0x7fff25227af0,
0x62e031) = 6
__fprintf_chk(0x7f1327821780, 1, 0x420cf7, 0x7fff25227af0, 0x62e031
<unfinished ...>
SYS_fstat(1, 0x7fff25227230)                            = 0
SYS_mmap(0, 4096, 3, 34, 0xffffffff)                   = 0x7f1327e72000
SYS_write(1, "/etc/X11/xorg.conf\n", 19)                = 19
[...]
```

You can change the type of traced events with the `-e` option. The following example prints library calls related to `fnmatch` and `strlen` functions:

```
tux@mercury:~> ltrace -e fnmatch,strlen find /etc -name xorg.conf
[...]
fnmatch("xorg.conf", "xorg.conf", 0)             = 0
strlen("Xresources")                             = 10
strlen("Xresources")                             = 10
strlen("Xresources")                             = 10
fnmatch("xorg.conf", "Xresources", 0)            = 1
strlen("xorg.conf.install")                      = 17
[...]
```

To display only the symbols included in a specific library, use `-l` *`/path/to/library`*:

```
tux@mercury:~> ltrace -l /lib64/librt.so.1 sleep 1
```

```
clock_gettime(1, 0x7fff4b5c34d0, 0, 0, 0)                  = 0
clock_gettime(1, 0x7fff4b5c34c0, 0xffffffffff600180, -1, 0) = 0
+++ exited (status 0) +++
```

You can make the output more readable by indenting each nested call by the specified number of space with the `-n` *`num_of_spaces`*.

17.3 Debugging and Profiling with Valgrind

Valgrind is a set of tools to debug and profile your programs so that they can run faster and with less errors. Valgrind can detect problems related to memory management and threading, or can also serve as a framework for building new debugging tools.

17.3.1 Installation

Valgrind is not shipped with standard openSUSE distribution. To install it on your system, you need to obtain SUSE Software Development Kit, and either install it as an Add-On product and run

`zypper install` *`valgrind`*

or browse through the SUSE Software Development Kit directory tree, locate the Valgrind package and install it with

`rpm -i valgrind-`*`version_architecture`*`.rpm`

17.3.2 Supported Architectures

Valgrind runs on the following architectures:

- i386
- x86_64 (AMD-64)
- ppc

- ppc64
- System z

17.3.3 General Information

The main advantage of Valgrind is that it works with existing compiled executables. You do not have to recompile or modify your programs to make use of it. Run Valgrind like this:

```
valgrind valgrind_options your-prog your-program-options
```

Valgrind consists of several tools, and each provides specific functionality. Information in this section is general and valid regardless of the used tool. The most important configuration option is `--tool` . This option tells Valgrind which tool to run. If you omit this option, `memcheck` is selected by default. For example, if you want to run `find ~ -name .bashrc` with Valgrind's `memcheck` tools, enter the following in the command line:

```
valgrind --tool=memcheck find ~ -name .bashrc
```

A list of standard Valgrind tools with a brief description follows:

`memcheck`
: Detects memory errors. It helps you tune your programs to behave correctly.

`cachegrind`
: Profiles cache prediction. It helps you tune your programs to run faster.

`callgrind`
: Works in a similar way to `cachegrind` but also gathers additional cache-profiling information.

`exp-drd`
: Detects thread errors. It helps you tune your multi-threaded programs to behave correctly.

`helgrind`
: Another thread error detector. Similar to `exp-drd` but uses different techniques for problem analysis.

`massif`
: A heap profiler. Heap is an area of memory used for dynamic memory allocation. This tool helps you tune your program to use less memory.

`lackey`
: An example tool showing instrumentation basics.

17.3.4 Default Options

Valgrind can read options at start-up. There are three places which Valgrind checks:

1. The file `.valgrindrc` in the home directory of the user who runs Valgrind.

2. The environment variable `$VALGRIND_OPTS`

3. The file `.valgrindrc` in the current directory where Valgrind is run from.

These resources are parsed exactly in this order, while later given options take precedence over earlier processed options. Options specific to a particular Valgrind tool must be prefixed with the tool name and a colon. For example, if you want `cachegrind` to always write profile data to the `/tmp/cachegrind_`*`PID`*`.log`, add the following line to the `.valgrindrc` file in your home directory:

```
--cachegrind:cachegrind-out-file=/tmp/cachegrind_%p.log
```

17.3.5 How Valgrind Works

Valgrind takes control of your executable before it starts. It reads debugging information from the executable and related shared libraries. The executable's code is redirected to the selected Valgrind tool, and the tool adds its own code to handle its debugging. Then the code is handed back to the Valgrind core and the execution continues.

For example, `memcheck` adds its code, which checks every memory access. As a consequence, the program runs much slower than in the native execution environment.

Valgrind simulates every instruction of your program. Therefore, it not only checks the code of your program, but also all related libraries (including the C library), libraries used for graphical environment, and so on. If you try to detect errors with

Valgrind, it also detects errors in associated libraries (like C, X11, or Gtk libraries). Because you probably do not need these errors, Valgrind can selectively, suppress these error messages to suppression files. The `--gen-suppressions=yes` tells Valgrind to report these suppressions which you can copy to a file.

Note that you should supply a real executable (machine code) as an Valgrind argument. Therefore, if your application is run, for example, from a shell or a Perl script you will by mistake get error reports related to `/bin/sh` (or `/usr/bin/perl`). In such case, you can use `--trace-children=`*`yes`* or, which is better, supply a real executable to avoid any processing confusion.

17.3.6 Messages

During its runtime, Valgrind reports messages with detailed errors and important events. The following example explains the messages:

```
tux@mercury:~> valgrind --tool=memcheck find ~ -name .bashrc
[...]
==6558== Conditional jump or move depends on uninitialised value(s)
==6558==    at 0x400AE79: _dl_relocate_object (in /lib64/ld-2.11.1.so)
==6558==    by 0x4003868: dl_main (in /lib64/ld-2.11.1.so)
[...]
==6558== Conditional jump or move depends on uninitialised value(s)
==6558==    at 0x400AE82: _dl_relocate_object (in /lib64/ld-2.11.1.so)
==6558==    by 0x4003868: dl_main (in /lib64/ld-2.11.1.so)
[...]
==6558== ERROR SUMMARY: 2 errors from 2 contexts (suppressed: 0 from 0)
==6558== malloc/free: in use at exit: 2,228 bytes in 8 blocks.
==6558== malloc/free: 235 allocs, 227 frees, 489,675 bytes allocated.
==6558== For counts of detected errors, rerun with: -v
==6558== searching for pointers to 8 not-freed blocks.
==6558== checked 122,584 bytes.
==6558==
==6558== LEAK SUMMARY:
==6558==    definitely lost: 0 bytes in 0 blocks.
==6558==      possibly lost: 0 bytes in 0 blocks.
==6558==    still reachable: 2,228 bytes in 8 blocks.
==6558==         suppressed: 0 bytes in 0 blocks.
==6558== Rerun with --leak-check=full to see details of leaked memory.
```

The `==6558==` introduces Valgrind's messages and contains the process ID number (PID). You can easily distinguish Valgrind's messages from the output of the program itself, and decide which messages belong to a particular process.

To make Valgrind's messages more detailed, use `-v` or even `-v -v`.

Basically, you can make Valgrind send its messages to three different places:

1. By default, Valgrind sends its messages to the file descriptor 2, which is the standard error output. You can tell Valgrind to send its messages to any other file descriptor with the `--log-fd=`*`file_descriptor_number`* option.

2. The second and probably more useful way is to send Valgrind's messages to a file with `--log-file=`*`filename`*. This option accepts several variables, for example, `%p` gets replaced with the PID of the currently profiled process. This way you can send messages to different files based on their PID. `%q{env_var}` is replaced with the value of the related `env_var` environment variable.

   The following example checks for possible memory errors during the Apache Web server restart, while following children processes and writing detailed Valgrind's messages to separate files distinguished by the current process PID:

   ```
   tux@mercury:~> valgrind -v --tool=memcheck --trace-children=yes \
   --log-file=valgrind_pid_%p.log rcapache2 restart
   ```

   This process created 52 log files in the testing system, and took 75 seconds instead of the usual 7 seconds needed to run `rcapache2 restart` without Valgrind, which is approximately 10 times more.

   ```
   tux@mercury:~> ls -1 valgrind_pid_*log
   valgrind_pid_11780.log
   valgrind_pid_11782.log
   valgrind_pid_11783.log
   [...]
   valgrind_pid_11860.log
   valgrind_pid_11862.log
   valgrind_pid_11863.log
   ```

3. You may also prefer to send the Valgrind's messages over the network. You need to specify the `aa.bb.cc.dd` IP address and `port_num` port number of the network socket with the `--log-socket=`*`aa.bb.cc.dd:port_num`* option. If you omit the port number, 1500 will be used.

   It is useless to send Valgrind's messages to a network socket if no application is capable of receiving them on the remote machine. That is why `valgrind-listener`, a simple listener, is shipped together with Valgrind. It accepts connections on the specified port and copies everything it receives to the standard output.

17.3.7 Error Messages

Valgrind remembers all error messages, and if it detects a new error, the error is compared against old error messages. This way Valgrind checks for duplicate error

messages. In case of a duplicate error, it is recorded but no message is shown. This mechanism prevents you from being overwhelmed by millions of duplicate errors.

The `-v` option will add a summary of all reports (sorted by their total count) to the end of the Valgrind's execution output. Moreover, Valgrind stops collecting errors if it detects either 1000 different errors, or 10 000 000 errors in total. If you want to suppress this limit and wish to see all error messages, use `--error-limit=no`.

Some errors usually cause other ones. Therefore, fix errors in the same order as they appear and re-check the program continuously.

17.4 For More Information

- For a complete list of options related to the described tracing tools, see the corresponding man page (`man 1 strace`, `man 1 ltrace`, and `man 1 valgrind`).
- To describe advanced usage of Valgrind is beyond the scope of this document. It is very well documented, see Valgrind User Manual [`http://valgrind.org/docs/manual/manual.html`]. These pages are indispensable if you need more advanced information on Valgrind or the usage and purpose of its standard tools.

18 kexec and kdump

kexec is a tool to boot to another kernel from the currently running one. You can perform faster system reboots without any hardware initialization. You can also prepare the system to boot to another kernel if the system crashes.

18.1 Introduction

With kexec, you can replace the running kernel with another one without a hard reboot. The tool is useful for several reasons:

- Faster system rebooting

  If you need to reboot the system frequently, kexec can save you significant time.

- Avoiding unreliable firmware and hardware

  Computer hardware is complex and serious problems may occur during the system start-up. You cannot always replace unreliable hardware immediately. kexec boots the kernel to a controlled environment with the hardware already initialized. The risk of unsuccessful system start is then minimized.

- Saving the dump of a crashed kernel

  kexec preserves the contents of the physical memory. After the *production* kernel fails, the *capture* kernel (an additional kernel running in a reserved memory range) saves the state of the failed kernel. The saved image can help you with the subsequent analysis.

- Booting without GRUB or LILO configuration

  When the system boots a kernel with kexec, it skips the boot loader stage. Normal booting procedure can fail due to an error in the boot loader configuration. With kexec, you do not depend on a working boot loader configuration.

18.2 Required Packages

If you intend to use kexec on openSUSE® to speed up reboots or avoid potential hardware problems, you need to install the `kexec-tools` package. It contains a script called `kexec-bootloader`, which reads the boot loader configuration and runs kexec with the same kernel options as the normal boot loader does. `kexec-bootloader -h` gives you the list of possible options.

To set up an environment that helps you obtain useful debug information in case of a kernel crash, you need to install `makedumpfile` in addition.

The preferred method to use kdump in openSUSE is through the YaST kdump module. Install the package `yast2-kdump` by entering `zypper install yast2-kdump` in the command line as `root`.

18.3 kexec Internals

The most important component of kexec is the `/sbin/kexec` command. You can load a kernel with kexec in two different ways:

- `kexec -l` *`kernel_image`* loads the kernel to the address space of a production kernel for a regular reboot. You can later boot to this kernel with `kexec -e`.

- `kexec -p` *`kernel_image`* loads the kernel to a reserved area of memory. This kernel will be booted automatically when the system crashes.

If you want to boot another kernel and preserve the data of the production kernel when the system crashes, you need to reserve a dedicated area of the system memory. The production kernel never loads to this area because it must be always available. It is used for the capture kernel so that the memory pages of the production kernel can be preserved. You reserve the area with `crashkernel =` *`size@offset`* as a command line parameter of the production kernel. Note that this is not a parameter of the capture kernel. The capture kernel does not use kexec at all.

The capture kernel is loaded to the reserved area and waits for the kernel to crash. Then kdump tries to invoke the capture kernel because the production kernel is no longer reliable at this stage. This means that even kdump can fail.

To load the capture kernel, you need to include the kernel boot parameters. Usually, the initial RAM file system is used for booting. You can specify it with `--initrd = filename`. With `--append = cmdline` , you append options to the command line of the kernel to boot. It is helpful to include the command line of the production kernel if these options are necessary for the kernel to boot. You can simply copy the command line with `--append = "$(cat /proc/cmdline)"` or add more options with `--append = "$(cat /proc/cmdline) more_options"` .

You can always unload the previously loaded kernel. To unload a kernel that was loaded with the `-l` option, use the `kexec -u` command. To unload a crash kernel loaded with the `-p` option, use `kexec -p -u` command.

18.4 Basic kexec Usage

To verify if your kexec environment works properly, follow these steps:

1. Make sure no users are currently logged in and no important services are running on the system.
2. Log in as `root`.
3. Switch to runlevel 1 with `telinit 1`
4. Load the new kernel to the address space of the production kernel with the following command:

   ```
   kexec -l /boot/vmlinuz --append="$(cat /proc/cmdline)"
   --initrd=/boot/initrd
   ```

5. Unmount all mounted file systems except the root file system with `umount -a`

IMPORTANT : Unmounting Root Filesystem

Unmounting all file systems will most likely produce a `device is busy` warning message. The root file system cannot be unmounted if the system is running. Ignore the warning.

6 Remount the root file system in read-only mode:

```
mount -o remount,ro /
```

7 Initiate the reboot of the kernel that you loaded in Étape 4 (p. 199) with `kexec -e`

It is important to unmount the previously mounted disk volumes in read-write mode. The `reboot` system call acts immediately upon calling. Hard drive volumes mounted in read-write mode neither synchronize nor unmount automatically. The new kernel may find them « dirty ». Read-only disk volumes and virtual file systems do not need to be unmounted. Refer to `/etc/mtab` to determine which file systems you need to unmount.

The new kernel previously loaded to the address space of the older kernel rewrites it and takes control immediately. It displays the usual start-up messages. When the new kernel boots, it skips all hardware and firmware checks. Make sure no warning messages appear. All the file systems are supposed to be clean if they had been unmounted.

18.5 How to Configure kexec for Routine Reboots

kexec is often used for frequent reboots. For example, if it takes a long time to run through the hardware detection routines or if the start-up is not reliable.

REMARQUE : Rebooting with kexec

In previous versions of openSUSE®, you had to manually edit the configuration file `/etc/sysconfig/shutdown` and the init script `/etc/init.d/halt` to use kexec to reboot the system. You no longer need to edit any system files, since version 11 is already configured for kexec reboots.

Note that firmware as well as the boot loader are not used when the system reboots with kexec. Any changes you make to the boot loader configuration will be ignored until the computer performs a hard reboot.

18.6 Basic kdump Configuration

You can use kdump to save kernel dumps. If the kernel crashes, it is useful to copy the memory image of the crashed environment to the file system. You can then debug the dump file to find the cause of the kernel crash. This is called « core dump » .

kdump works similar to kexec (seeChapitre 18, *kexec and kdump* (p. 197)). The capture kernel is executed after the running production kernel crashes. The difference is that kexec replaces the production kernel with the capture kernel. With kdump, you still have access to the memory space of the crashed production kernel. You can save the memory snapshot of the crashed kernel in the environment of the kdump kernel.

You can either configure kdump manually or with YaST.

18.6.1 Manual kdump Configuration

kdump reads its configuration from the `/etc/sysconfig/kdump` file. To make sure that kdump works on your system, its default configuration is sufficient. To use kdump with the default settings,follow these steps:

1 Append the following kernel command line option to your boot loader configuration, and reboot the system:

`crashkernel=`*`size@offset`*

You can find the corresponding values for *`size`* and *`offset`* in the following table:

Tableau 18.1 *Recommended Values for Additional Kernel Command Line Parameters*

Architecture	Recommended value
i386 and x86-64	`crashkernel=256M` for 0 - 12 GB memory `crashkernel=512M` for 13 - 48 GB memory `crashkernel=1G` for 49 - 128 GB memory

Architecture	Recommended value
	`crashkernel=2G` for 129 - 256 GB memory
IA64	crashkernel=256M (small systems) or crashkernel=512M (larger systems)
ppc64	crashkernel=128M@4M or crashkernel=256M@M4 (larger systems)

2 Enable kdump init script:

```
chkconfig boot.kdump on
```

3 You can edit the options in `/etc/sysconfig/kdump`. Reading the comments will help you understand the meaning of individual options.

4 Execute the init script once with `rckdump start`, or reboot the system.

After configuring kdump with the default values, check if it works as expected. Make sure that no users are currently logged in and no important services are running on your system. Then follow these steps:

1 Switch to runlevel 1 with `telinit 1`

2 Unmount all the disk file systems except the root file system with `umount -a`

3 Remount the root file system in read-only mode: `mount -o remount,ro /`

4 Invoke « kernel panic » with the `procfs` interface to Magic SysRq keys:

```
echo c >/proc/sysrq-trigger
```

IMPORTANT : The Size of Kernel Dumps

The `KDUMP_KEEP_OLD_DUMPS` option controls the number of preserved kernel dumps (default is 5). Without compression, the size of the dump can

take up to the size of the physical RAM memory. Make sure you have sufficient space on the `/var` partition.

The capture kernel boots and the crashed kernel memory snapshot is saved to the file system. The save path is given by the `KDUMP_SAVEDIR` option and it defaults to `/var/crash`. If `KDUMP_IMMEDIATE_REBOOT` is set to `yes` , the system automatically reboots the production kernel. Log in and check that the dump has been created under `/var/crash`.

AVERTISSEMENT : Screen Freezes in X11 Session


When kdump takes control and you are logged in an X11 session, the screen will freeze without any notice. Some kdump activity can be still visible (for example, deformed messages of a booting kernel on the screen).

Do not reset the computer because kdump always needs some time to complete its task.

18.6.2 YaST Configuration

In order to configure kdump with YaST, you need to install the `yast2-kdump` package. Then either start the *Kernel Kdump* module in the *System* category of YaST Control Center, or enter `yast2 kdump` in the command line as `root`.

Figure 18.1 *YaST2 Kdump Module - Start-Up Page*

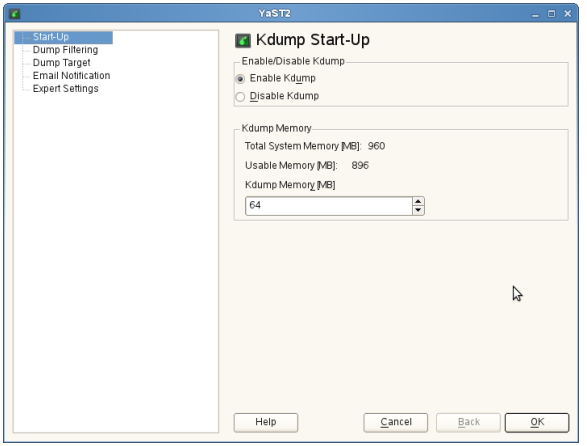

In the *Start-Up* window, select *Enable Kdump*. The default value for kdump memory is sufficient on most systems.

Click *Dump Filtering* in the left pane, and check what pages to include in the dump. You do not need to include the following memory content to be able to debug kernel problems:

- Pages filled with zero
- Cache pages
- User data pages
- Free pages

In the *Dump Target* window, select the type of the dump target and the URL where you want to save the dump. If you selected a network protocol, such as FTP or SSH, you need to enter relevant access information as well.

Fill the *Email Notification* window information if you want kdump to inform you about its events via E-mail and confirm your changes with *OK* after fine tuning kdump in the *Expert Settings* window. kdump is now configured.

18.7 Analyzing the Crash Dump

After you obtain the dump, it is time to analyze it. There are several options.

The original tool to analyze the dumps is GDB. You can even use it in the latest environments, although it has several disadvantages and limitations:

- GDB was not specifically designed to debug kernel dumps.
- GDB does not support ELF64 binaries on 32-bit platforms.
- GDB does not understand other formats than ELF dumps (it cannot debug compressed dumps).

That is why the *crash* utility was implemented. It analyzes crash dumps and debugs the running system as well. It provides functionality specific to debugging the Linux kernel and is much more suitable for advanced debugging.

If you want to debug the Linux kernel, you need to install its debugging information package in addition. Check if the package is installed on your system with `zypper se kernel | grep debug`.

IMPORTANT : Repository for Packages with Debugging Information

If you subscribed your system for online updates, you can find « debuginfo » packages in the `*-Debuginfo-Updates` online installation repository relevant for openSUSE 12.3. Use YaST to enable the repository.

To open the captured dump in `crash` on the machine that produced the dump, use a command like this:

```
crash /boot/vmlinux-2.6.32.8-0.1-default.gz /var/
crash/2010-04-23-11\:17/vmcore
```

The first parameter represents the kernel image. The second parameter is the dump file captured by kdump. You can find this file under `/var/crash` by default.

18.7.1 Kernel Binary Formats

The Linux kernel comes in Executable and Linkable Format (ELF). This file is usually called `vmlinux` and is directly generated in the compilation process. Not all boot loaders, especially on x86 (i386 and x86_64) architecture, support ELF binaries. The following solutions exist on different architectures supported by openSUSE®.

18.7.1.1 x86 (i386 and x86_64)

Mostly for historic reasons, the Linux kernel consists of two parts: the Linux kernel itself (`vmlinux`) and the setup code run by the boot loader.

These two parts are linked together in a file called `bzImage`, which can be found in the kernel source tree. The file is now called `vmlinuz` (note `z` vs. `x`) in the kernel package.

The ELF image is never directly used on x86. Therefore, the main kernel package contains the `vmlinux` file in compressed form called `vmlinux.gz`.

To sum it up, an x86 SUSE kernel package has two kernel files:

- `vmlinuz` which is executed by the boot loader.

- `vmlinux.gz`, the compressed ELF image that is required by *crash* and GDB.

18.7.1.2 IA64

The `elilo` boot loader, which boots the Linux kernel on the IA64 architecture, supports loading ELF images (even compressed ones) out of the box. The IA64 kernel package contains only one file called `vmlinuz`. It is a compressed ELF image. `vmlinuz` on IA64 is the same as `vmlinux.gz` on x86.

18.7.1.3 PPC and PPC64

The `yaboot` boot loader on PPC also supports loading ELF images, but not compressed ones. In the PPC kernel package, there is an ELF Linux kernel file `vmlinux`. Considering *crash*, this is the easiest architecture.

If you decide to analyze the dump on another machine, you must check both the architecture of the computer and the files necessary for debugging.

You can analyze the dump on another computer only if it runs a Linux system of the same architecture. To check the compatibility, use the command `uname -i` on both computers and compare the outputs.

If you are going to analyze the dump on another computer, you also need the appropriate files from the `kernel` and `kernel debug` packages.

1. Put the kernel dump, the kernel image from `/boot`, and its associated debugging info file from `/usr/lib/debug/boot` into a single empty directory.
2. Additionally, copy the kernel modules from `/lib/modules/$(uname -r)/kernel/` and the associated debug info files from `/usr/lib/debug/lib/modules/$(uname -r)/kernel/` into a subdirectory named `modules`.
3. In the directory with the dump, the kernel image, its debug info file, and the `modules` subdirectory, launch the crash utility: `crash` *`vmlinux-version vmcore`*.

REMARQUE : Support for Kernel Images

Compressed kernel images (gzip, not the bzImage file) are supported by SUSE packages of crash since openSUSE® 11. For older versions, you have to extract the `vmlinux.gz` (x86) or the `vmlinuz` (IA64) to `vmlinux`.

Regardless of the computer on which you analyze the dump, the crash utility will produce an output similar to this:

```
tux@mercury:~> crash /boot/vmlinux-2.6.32.8-0.1-default.gz
/var/crash/2010-04-23-11\:17/vmcore

crash 4.0-7.6
Copyright (C) 2002, 2003, 2004, 2005, 2006, 2007, 2008  Red Hat, Inc.
Copyright (C) 2004, 2005, 2006  IBM Corporation
Copyright (C) 1999-2006  Hewlett-Packard Co
Copyright (C) 2005, 2006  Fujitsu Limited
Copyright (C) 2006, 2007  VA Linux Systems Japan K.K.
Copyright (C) 2005  NEC Corporation
Copyright (C) 1999, 2002, 2007  Silicon Graphics, Inc.
Copyright (C) 1999, 2000, 2001, 2002  Mission Critical Linux, Inc.
This program is free software, covered by the GNU General Public License,
and you are welcome to change it and/or distribute copies of it under
certain conditions.  Enter "help copying" to see the conditions.
This program has absolutely no warranty.  Enter "help warranty" for details.

GNU gdb 6.1
Copyright 2004 Free Software Foundation, Inc.
GDB is free software, covered by the GNU General Public License, and you are
welcome to change it and/or distribute copies of it under certain
 conditions.
Type "show copying" to see the conditions.
There is absolutely no warranty for GDB.  Type "show warranty" for details.
This GDB was configured as "x86_64-unknown-linux-gnu"...

      KERNEL: /boot/vmlinux-2.6.32.8-0.1-default.gz
   DEBUGINFO: /usr/lib/debug/boot/vmlinux-2.6.32.8-0.1-default.debug
    DUMPFILE: /var/crash/2009-04-23-11:17/vmcore
        CPUS: 2
        DATE: Thu Apr 23 13:17:01 2010
      UPTIME: 00:10:41
LOAD AVERAGE: 0.01, 0.09, 0.09
       TASKS: 42
    NODENAME: eros
     RELEASE: 2.6.32.8-0.1-default
     VERSION: #1 SMP 2010-03-31 14:50:44 +0200
     MACHINE: x86_64  (2999 Mhz)
      MEMORY: 1 GB
       PANIC: "SysRq : Trigger a crashdump"
         PID: 9446
     COMMAND: "bash"
        TASK: ffff88003a57c3c0  [THREAD_INFO: ffff880037168000]
         CPU: 1
       STATE: TASK_RUNNING (SYSRQ)
crash>
```

The command output prints first useful data: There were 42 tasks running at the moment of the kernel crash. The cause of the crash was a SysRq trigger invoked by

the task with PID 9446. It was a Bash process because the `echo` that has been used is an internal command of the Bash shell.

The *crash* utility builds upon GDB and provides many useful additional commands. If you enter `bt` without any parameters, the backtrace of the task running at the moment of the crash is printed:

```
crash> bt
PID: 9446   TASK: ffff88003a57c3c0  CPU: 1   COMMAND: "bash"
 #0 [ffff880037169db0] crash_kexec at ffffffff80268fd6
 #1 [ffff880037169e80] __handle_sysrq at ffffffff803d50ed
 #2 [ffff880037169ec0] write_sysrq_trigger at ffffffff802f6fc5
 #3 [ffff880037169ed0] proc_reg_write at ffffffff802f068b
 #4 [ffff880037169f10] vfs_write at ffffffff802b1aba
 #5 [ffff880037169f40] sys_write at ffffffff802b1c1f
 #6 [ffff880037169f80] system_call_fastpath at ffffffff8020bfbb
    RIP: 00007fa958991f60  RSP: 00007fff61330390  RFLAGS: 00010246
    RAX: 0000000000000001  RBX: ffffffff8020bfbb  RCX: 0000000000000001
    RDX: 0000000000000002  RSI: 00007fa959284000  RDI: 0000000000000001
    RBP: 0000000000000002   R8: 00007fa9592516f0   R9: 00007fa958c209c0
    R10: 00007fa958c209c0  R11: 0000000000000246  R12: 00007fa958c1f780
    R13: 00007fa959284000  R14: 0000000000000002  R15: 00000000595569d0
    ORIG_RAX: 0000000000000001  CS: 0033  SS: 002b
crash>
```

Now it is clear what happened: The internal `echo` command of Bash shell sent a character to `/proc/sysrq-trigger`. After the corresponding handler recognized this character, it invoked the `crash_kexec()` function. This function called `panic()` and kdump saved a dump.

In addition to the basic GDB commands and the extended version of `bt`, the crash utility defines many other commands related to the structure of the Linux kernel. These commands understand the internal data structures of the Linux kernel and present their contents in a human readable format. For example, you can list the tasks running at the moment of the crash with `ps`. With `sym`, you can list all the kernel symbols with the corresponding addresses, or inquire an individual symbol for its value. With `files`, you can display all the open file descriptors of a process. With `kmem`, you can display details about the kernel memory usage. With `vm`, you can inspect the virtual memory of a process, even at the level of individual page mappings. The list of useful commands is very long and many of these accept a wide range of options.

The commands that we mentioned reflect the functionality of the common Linux commands, such as `ps` and `lsof`. If you would like to find out the exact sequence of events with the debugger, you need to know how to use GDB and to have strong

debugging skills. Both of these are out of the scope of this document. In addition, you need to understand the Linux kernel. Several useful reference information sources are given at the end of this document.

18.8 Advanced kdump Configuration

The configuration for kdump is stored in `/etc/sysconfig/kdump`. You can also use YaST to configure it. kdump configuration options are available under *System* > *Kernel Kdump* in YaST Control Center. The following kdump options may be useful for you:

You can change the directory for the kernel dumps with the `KDUMP_SAVEDIR` option. Keep in mind that the size of kernel dumps can be very large. kdump will refuse to save the dump if the free disk space, subtracted by the estimated dump size, drops below the value specified by the `KDUMP_FREE_DISK_SIZE` option. Note that KDUMP_SAVEDIR understands URL format *`protocol://specification`*, where *`protocol`* is one of `file`, `ftp`, `sftp`, `nfs` or `cifs`, and `specification` varies for each protocol. For example, to save kernel dump on an FTP server, use the following URL as a template: `ftp://username:password@ftp.example.com:123/var/crash`.

Kernel dumps are usually huge and contain many pages that are not necessary for analysis. With `KDUMP_DUMPLEVEL` option, you can omit such pages. The option understands numeric value between 0 and 31. If you specify *`0`*, the dump size will be largest. If you specify *`31`*, it will produce the smallest dump. For a complete table of possible values, see the manual page of `kdump` (`man 7 kdump`).

Sometimes it is very useful to make the size of the kernel dump smaller. For example, if you want to transfer the dump over the network, or if you need to save some disk space in the dump directory. This can be done with `KDUMP_DUMPFORMAT` set to *`compressed`*. The `crash` utility supports dynamic decompression of the compressed dumps.

IMPORTANT : Changes to kdump Configuration File

You always need to execute `rckdump restart` after you make manual changes to `/etc/sysconfig/kdump`. Otherwise these changes will take effect next time you reboot the system.

18.9 For More Information

Since there is no single comprehensive reference to kexec and kdump usage, you have to explore several resources to get the information you need. Here are some of them:

- For the kexec utility usage, see the manual page of `kexec` (`man 8 kexec`).
- You can find general information about kexec at `http://www.ibm.com/developerworks/linux/library/l-kexec.html` . Might be slightly outdated.
- For more details on kdump specific to SUSE Linux, see `http://ftp.suse.com/pub/people/tiwai/kdump-training/kdump-training.pdf` .
- An in-depth description of kdump internals can be found at `http://lse.sourceforge.net/kdump/documentation/ols2oo5-kdump-paper.pdf` .

For more details on *crash* dump analysis and debugging tools, use the following resources:

- In addition to the info page of GDB (`info gdb`), you might want to read the printable guides at `http://sourceware.org/gdb/documentation/` .
- A white paper with a comprehensive description of the crash utility usage can be found at `http://people.redhat.com/anderson/crash_whitepaper/` .
- The crash utility also features a comprehensive online help. Just write `help` *`command`* to display the online help for `command`.
- If you have the necessary Perl skills, you can use Alicia to make the debugging easier. This Perl-based front end to the crash utility can be found at `http://alicia.sourceforge.net/` .
- If you prefer Python instead, you may want to install Pykdump. This package helps you control GDB through Python scripts and can be downloaded from `http://sf.net/projects/pykdump` .
- A very comprehensive overview of the Linux kernel internals is given in *Understanding the Linux Kernel* by Daniel P. Bovet and Marco Cesati (ISBN 978-0-596-00565-8).

A

Licences GNU

Cette annexe contient les licences GNU General Public License version 2 et GNU Free Documentation License version 1.2.

GNU General Public License

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The « Program », below, refers to any such program or work, and a « work based on the Program » means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term « modification ».) Each licensee is addressed as « you ».

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and « any later version », you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the « copyright » line and a pointer to where the full notice is found.

```
one line to give the program's name and an idea of what it does.
Copyright (C) yyyy name of author


This program is free software; you can redistribute it and/or
modify it under the terms of the GNU General Public License
as published by the Free Software Foundation; either version 2
of the License, or (at your option) any later version.


This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.


You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details
type `show w'. This is free software, and you are welcome
to redistribute it under certain conditions; type `show c'
for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a « copyright disclaimer » for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright
interest in the program `Gnomovision'
(which makes passes at compilers) written
by James Hacker.


signature of Ty Coon, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License [http://www.fsf.org/licenses/lgpl.html] instead of this License.

GNU Free Documentation License

Copyright (C) 2000, 2001, 2002 Free Software Foundation, Inc. 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA. Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions what-

soever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

C. State on the Title page the name of the publisher of the Modified Version, as the publisher.

D. Preserve all the copyright notices of the Document.

E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

H. Include an unaltered copy of this License.

I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.

M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.

N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.

O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users

beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See http://www.gnu.org/copyleft/.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

ADDENDUM: How to use this License for your documents

```
Copyright (c) YEAR YOUR NAME.
Permission is granted to copy, distribute and/or modify this document
under the terms of the GNU Free Documentation License, Version 1.2
or any later version published by the Free Software Foundation;
with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts.
A copy of the license is included in the section entitled “GNU
Free Documentation License”.
```

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the “with...Texts.” line with this:

```
with the Invariant Sections being LIST THEIR TITLES, with the
Front-Cover Texts being LIST, and with the Back-Cover Texts being LIST.
```

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.